


CHAPTER-V

Two Degree of Freedom

Introduction

n In earlier classes we have discussed analysis of single degree of freedom systems

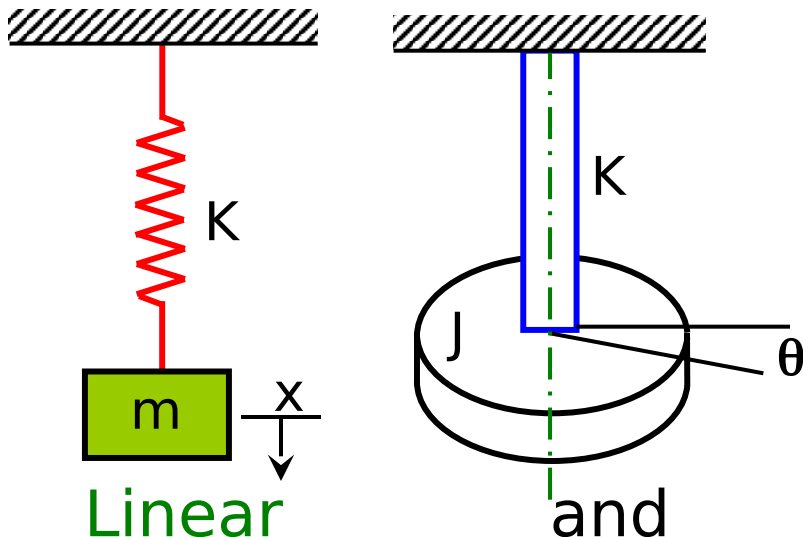

Linear

Torsional

Vibratory systems

Degree of freedom:


It is the number of independent co-ordinates required to describe the motion of a vibratory system

Systems with two degree of freedom

Introduction

n Degree of freedom of a system =
(Number of masses in a system) **x** (number of possible types of motion of each mass)

It is well known that each mass point has **SIX** degrees of freedom in space

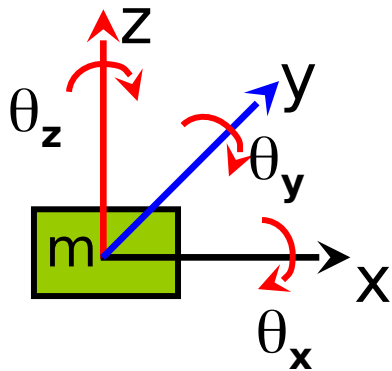


Translation: x , y and z direction

Rotation: x , y and z direction


Systems with two degree of freedom

Introduction

n

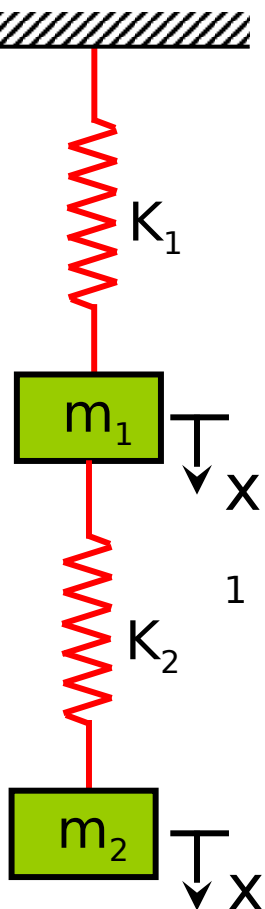

Linear and Torsional
2 DOF Vibratory
systems

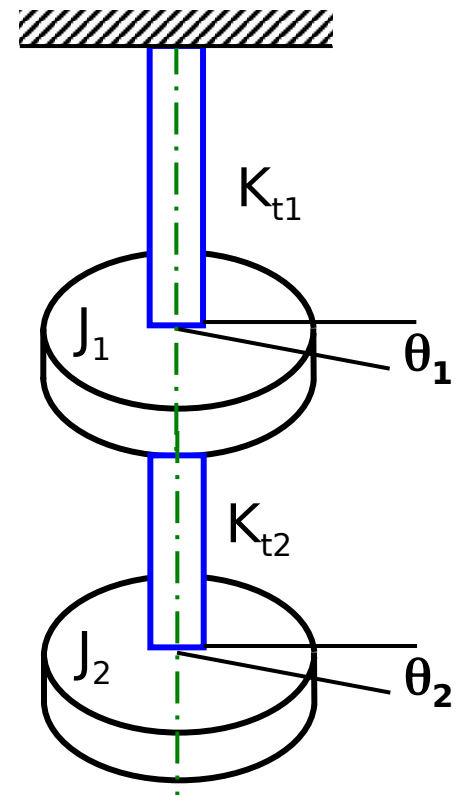

Systems with two degree of freedom

Introduction


A two-degree freedom system is one that requires two coordinates to describe its motion.

These coordinates are called generalized coordinates when they are independent of each other.

A two DOF system has two equations of motion, which can be solved to obtain two natural frequencies

Systems with two degree of freedom


Mode

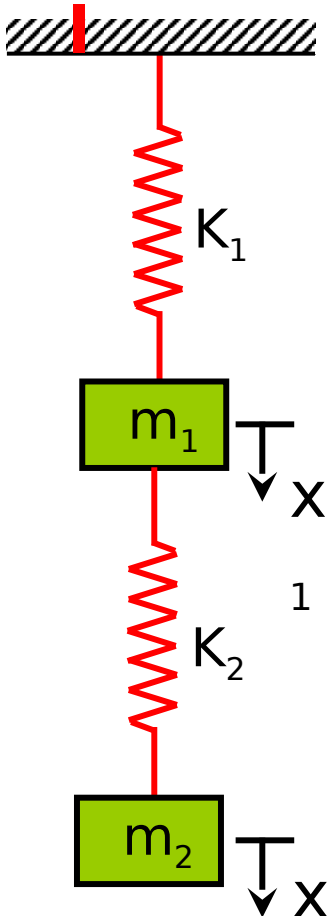

Obtain the equations of the motion of the system

2


Governing equations
Newton's method

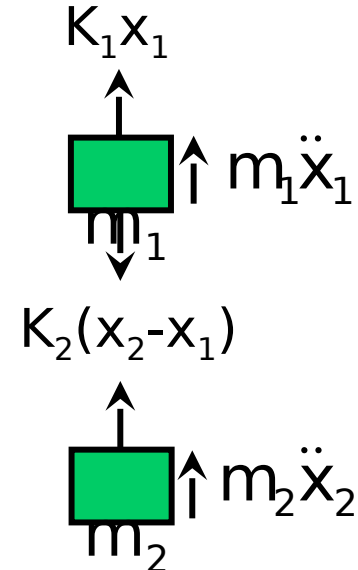

Force equilibrium diagram

Systems with two degree of freedom

Governing equations Newton's method

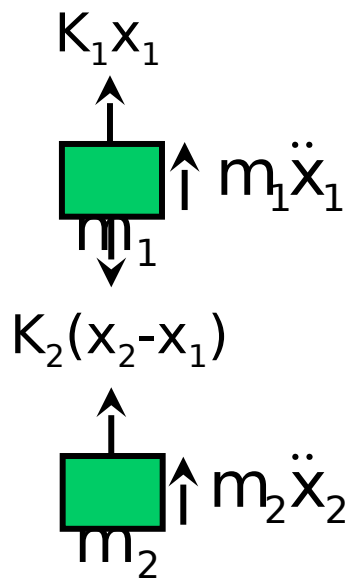

. From Force equilibrium diagram of mass m_1

$$m_1 \ddot{x}_1 + K_1 x_1 - K_2(x_2 - x_1) = 0$$

$$m_1 \ddot{x}_1 + (K_1 + K_2)x_1 - K_2 x_2 = 0 \quad \text{1st Eqn. of motion}$$

. From Force equilibrium diagram of mass m_2

$$m_2 \ddot{x}_2 + K_2(x_2 - x_1) = 0$$

$$m_2 \ddot{x}_2 - K_2 x_1 + K_2 x_2 = 0$$

2nd Eqn. of motion

Systems with two degree of freedom

Governing equations

Matrix
form

$$[M]\{\ddot{x}\} + [K]\{x\} = [0]$$

Mass
matrix

generalized
acceleration
vector

Stiffness
matrix

generalized
displacement
vector

generalized
force vector

Systems with two degree of freedom

Solution of governing equations

It is possible to have pure harmonic free vibration for both the masses.

Let us assume $x_1 = A_1 \sin(\omega t + \phi)$

$$x_2 = A_2 \sin(\omega t + \phi)$$

The above equations have to satisfy the governing equations of motions

$$m_1 \ddot{x}_1 + (K_1 + K_2)x_1 - K_2 x_2 = 0$$

$$m_2 \ddot{x}_2 - K_2 x_1 + K_2 x_2 = 0$$

1st Eqn. of motion

2nd Eqn. of motion

Systems with two degree of freedom

Solution of governing equations

$$[(K_1 + K_2) - m_1\omega^2]A_1\sin(\omega t + \phi) - K_2A_2\sin(\omega t + \phi) = 0$$

$$- K_2A_1\sin(\omega t + \phi) - (K_2 - m_2\omega^2)A_2\sin(\omega t + \phi) = 0$$

In above equations $\sin(\omega t + \phi) \neq 0$
The above equations reduces to: (characteristic equation)

$$[(K_1 + K_2) - m_1\omega^2]A_1 - K_2A_2 = 0$$

$$- K_2A_1 - (K_2 - m_2\omega^2)A_2 = 0$$

Systems with two degree of freedom

Solution of governing equations

The solution of equations is:

$$\begin{vmatrix} (K_1 + K_2) - m_1\omega^2 & -K_2 \\ -K_2 & K_2 - m_2\omega^2 \end{vmatrix} = 0$$

The above equation is referred as a **characteristic determinant**

Solving, we get : $[m_2(K_1 + K_2) + m_1K_2]\omega^2 + K_1K_2 = 0$

$$\omega^4 - \left[\frac{(K_1 + K_2)}{m_1} + \frac{K_2}{m_2} \right] \omega^2 + \frac{K_1K_2}{m_1m_2} = 0$$

Frequency equation

Systems with two degree of freedom

Solution of governing equations

For simplification, let us consider :

$$K_1 = K_2 = K$$

$$m_1 = m_2 = m$$

The frequency equation changes to:

$$\omega^4 - \left[\frac{2K}{m} + \frac{K}{m} \right] \omega^2 + \frac{K^2}{m^2} = 0$$

$$\omega^4 - \left[\frac{3K}{m} \right] \omega^2 + \frac{K^2}{m^2} = 0$$

put $\omega^2 = \lambda$, in the above equation:

Systems with two degree of freedom

Solution of governing equations

$$\lambda^2 - \left[\frac{3K}{m} \right] \lambda + \frac{K^2}{m^2} = 0 \quad \lambda_1, \lambda_2 = \omega_1^2, \omega_2^2 = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$

$$\lambda_1, \lambda_2 = \omega_1^2, \omega_2^2 = \frac{\frac{3K}{m} \pm \sqrt{\left(\frac{3K}{m} \right)^2 - \frac{4K^2}{m^2}}}{2}$$

$$\omega_1^2, \omega_2^2 = \frac{\frac{3K}{m} \pm \sqrt{\frac{5K^2}{m^2}}}{2} \quad \omega_1^2, \omega_2^2 = \frac{(3 \pm \sqrt{5})K}{2m}$$

Systems with two degree of freedom

Solution of governing equations

$$\omega_1 = \sqrt{\frac{(3 - \sqrt{5})\frac{K}{m}}{2}}$$


$$\omega_1 = 0.61\omega_n$$

$$\omega_2 = \sqrt{\frac{(3 + \sqrt{5})\frac{K}{m}}{2}}$$

$$\omega_2 = 1.61\omega_n \text{ radians/sec}$$

As the system has two natural frequencies, under certain conditions it may vibrate with first or second frequency, which are referred as **principal modes of vibration**

Torsional Vibration

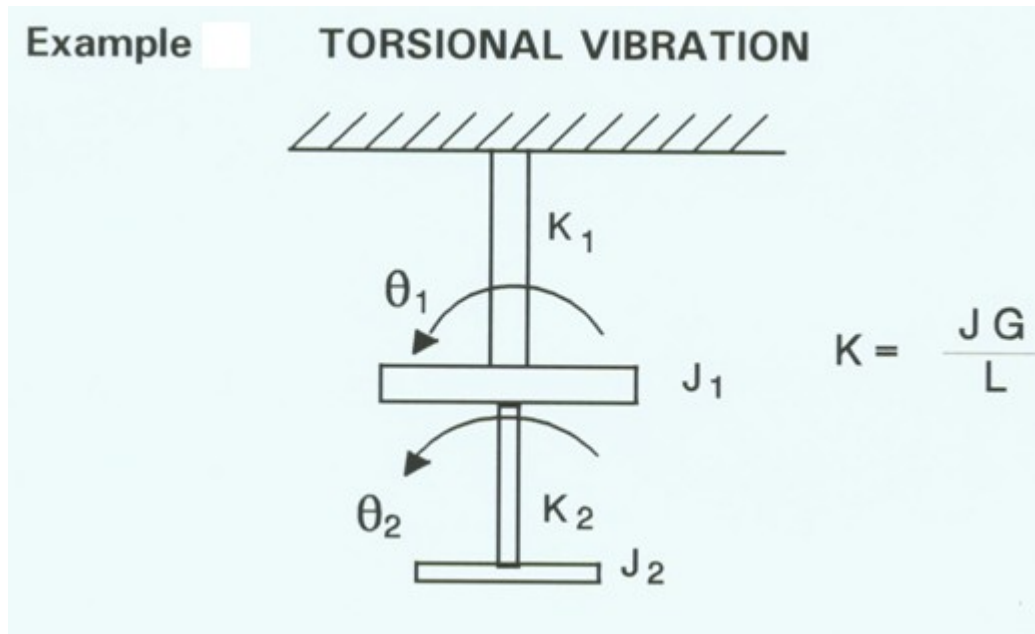

Equations of motion

for θ_1 :

$$J_1 \ddot{\theta}_1 = -K_1 \theta_1 - K_2 (\theta_1 - \theta_2)$$

$$J_1 \ddot{\theta}_1 + K_1 \theta_1 + K_2 (\theta_1 - \theta_2) = 0$$

Torsional Vibration

Equations of motion for θ_2 :

$$J_2 \ddot{\theta}_2 = -K_2(\theta_2 - \theta_1)$$

$$J_2 \ddot{\theta}_2 + K_2(\theta_2 - \theta_1) = 0$$

Assume: $\theta_1 = A \cos(\omega t - \phi)$ $\theta_2 = B \cos(\omega t - \phi)$

Differentiating the above equations twice:

$$\ddot{\theta}_1 = -\omega^2 A \cos(\omega t - \phi) \quad \ddot{\theta}_2 = -\omega^2 B \cos(\omega t - \phi)$$

Torsional Vibration

Substituting equations the displacement equations the EOM yields the following.

$$-J_1\omega^2 A + (K_1 + K_2)A - K_2 B = 0$$

$$-J_2\omega^2 B + K_2 B - K_2 A = 0$$

Find the solutions to the two independent frequencies by solving the determinant and finding the Eigenvalues.

$$\begin{vmatrix} (K_1 + K_2 - J_1\omega^2) & -K_2 \\ -K_2 & (K_2 - J_2\omega^2) \end{vmatrix} = 0$$

$$K_1 K_2 + K_2^2 - K_1 J_2 \omega^2 - K_2 J_2 \omega^2 - K_2 J_1 \omega^2 + J_1 J_2 \omega^4 - K_2^2 = 0$$

$$J_1 J_2 \omega^4 - (K_1 + K_2) J_2 \omega^2 - K_2 J_1 \omega^2 + K_1 K_2 = 0$$

Torsional Vibration


$$\omega^4 - \left[\frac{(K_1 + K_2)}{J_1} + \frac{K_2}{J_2} \right] \omega^2 + \frac{K_1 K_2}{J_1 J_2} = 0$$

Solve for the Eigen Values:

$$\lambda = \omega^2 \quad \lambda_{1,2} = \frac{-b \pm \sqrt{b^2 - 4ac}}{2a}$$


Systems with two degree of freedom

Forced Vibration

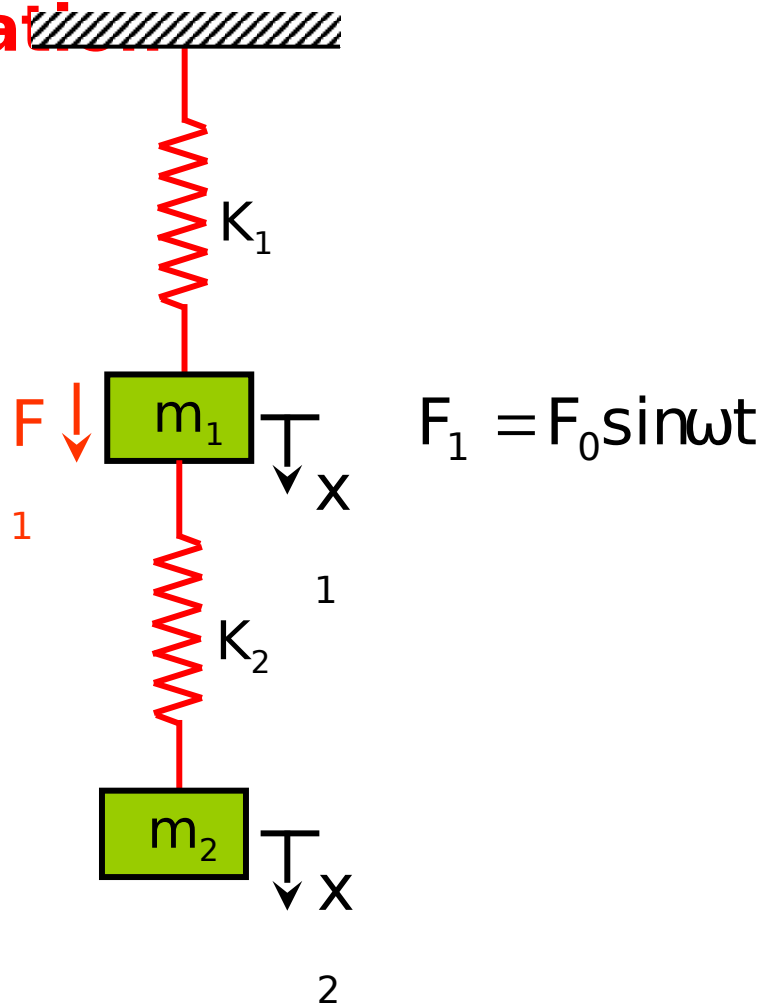


Systems with two degree of freedom

Problem-1

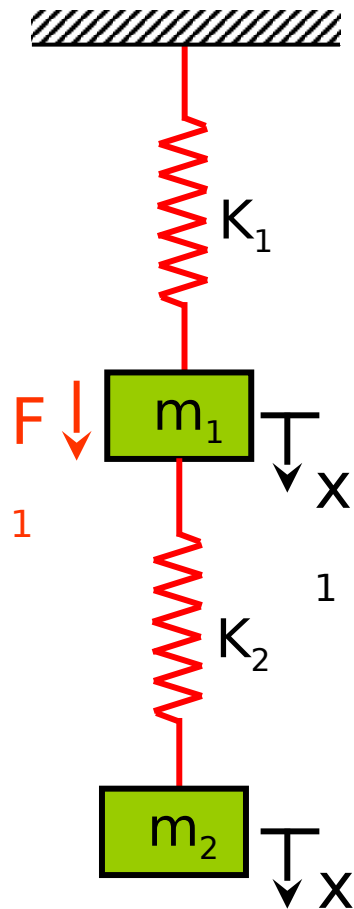

2

Governing equations Newton's method

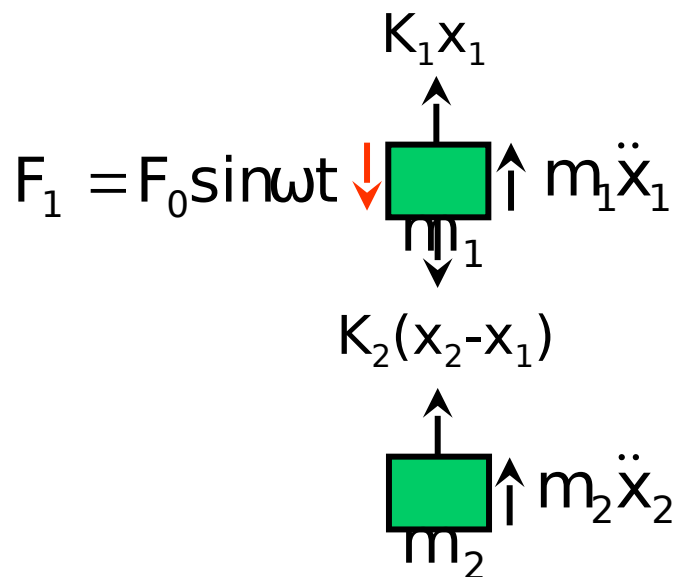


. Force equilibrium diagram

Systems with two degree of freedom

Governing equations

Newton's method

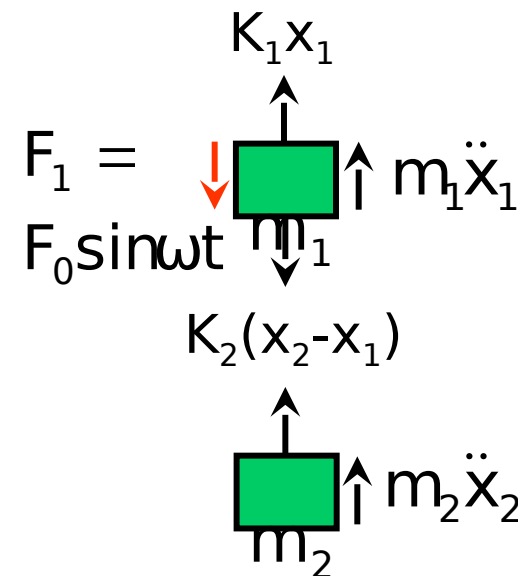

. From Force equilibrium diagram of mass m_1

$$m_1 \ddot{x}_1 + K_1 x_1 - K_2(x_2 - x_1) = F_0 \sin \omega t$$

$$m_1 \ddot{x}_1 + (K_1 + K_2)x_1 - K_2 x_2 = F_0 \sin \omega t$$

1st
Eqn.

. From Force equilibrium diagram of mass m_2

$$m_2 \ddot{x}_2 + K_2(x_2 - x_1) = 0$$

$$m_2 \ddot{x}_2 - K_2 x_1 + K_2 x_2 = 0$$

of motion
2nd Eqn. of motion

Systems with two degree of freedom

Solution of governing equations

It is possible to have pure harmonic free vibration for both the masses.

Let us assume $x_1 = A_1 \sin \omega t$ where ω is the
 $x_2 = A_2 \sin \omega t$ forcing frequency

Be the forced response of the system, where A_1 and A_2 are the amplitudes to be obtained

The above equations have to satisfy the governing equations of motions

$$m_1 \ddot{x}_1 + (K_1 + K_2)x_1 - K_2 x_2 = F_0 \sin \omega t \quad \text{1st Eqn. of motion}$$
$$m_2 \ddot{x}_2 - K_2 x_1 + K_2 x_2 = 0 \quad \text{2nd Eqn. of motion}$$

Systems with two degree of freedom

Solution of governing equations

$$[(K_1 + K_2) - m_1\omega^2]A_1\sin(\omega t + \varphi) - K_2A_2\sin(\omega t + \varphi) = F_0\sin\omega t$$

$$- K_2A_1\sin(\omega t + \varphi) - (K_2 - m_2\omega^2)A_2\sin(\omega t + \varphi) = 0$$

In above equations $\sin(\omega t + \varphi) \neq 0$

The above equations reduces to: (characteristic equation)

$$[(K_1 + K_2) - m_1\omega^2]A_1 - K_2A_2 = F_0\sin\omega t$$

$$- K_2A_1 - (K_2 - m_2\omega^2)A_2 = 0$$

Systems with two degree of freedom

Solution of governing

equations $[(K_1 + K_2) - m_1\omega^2]A_1 - K_2A_2 = F_0\sin\omega t$

$$- K_2A_1 - (K_2 - m_2\omega^2)A_2 = 0$$

Solution of governing equations

From above equations obtain A_1 and A_2 by Cramer's rule

$$A_1 = \frac{\begin{vmatrix} F_0 & -K_2 \\ 0 & K_2 - m_2\omega^2 \end{vmatrix}}{\Delta}$$

$$A_2 = \frac{\begin{vmatrix} (K_1 + K_2) - m_1\omega^2 & F_0 \\ -K_2 & 0 \end{vmatrix}}{\Delta}$$

where Δ is the determinant of characteristic equations


$$\Delta = \begin{vmatrix} (K_1 + K_2) - m_1\omega^2 & -K_2 \\ -K_2 & K_2 - m_2\omega^2 \end{vmatrix} \neq 0$$

$$\Delta = \{(K_1 + K_2) - m_1\omega^2\} \{K_2 - m_2\omega^2\} - K_2^2$$

Systems with two degree of freedom

Dynamic

vibration

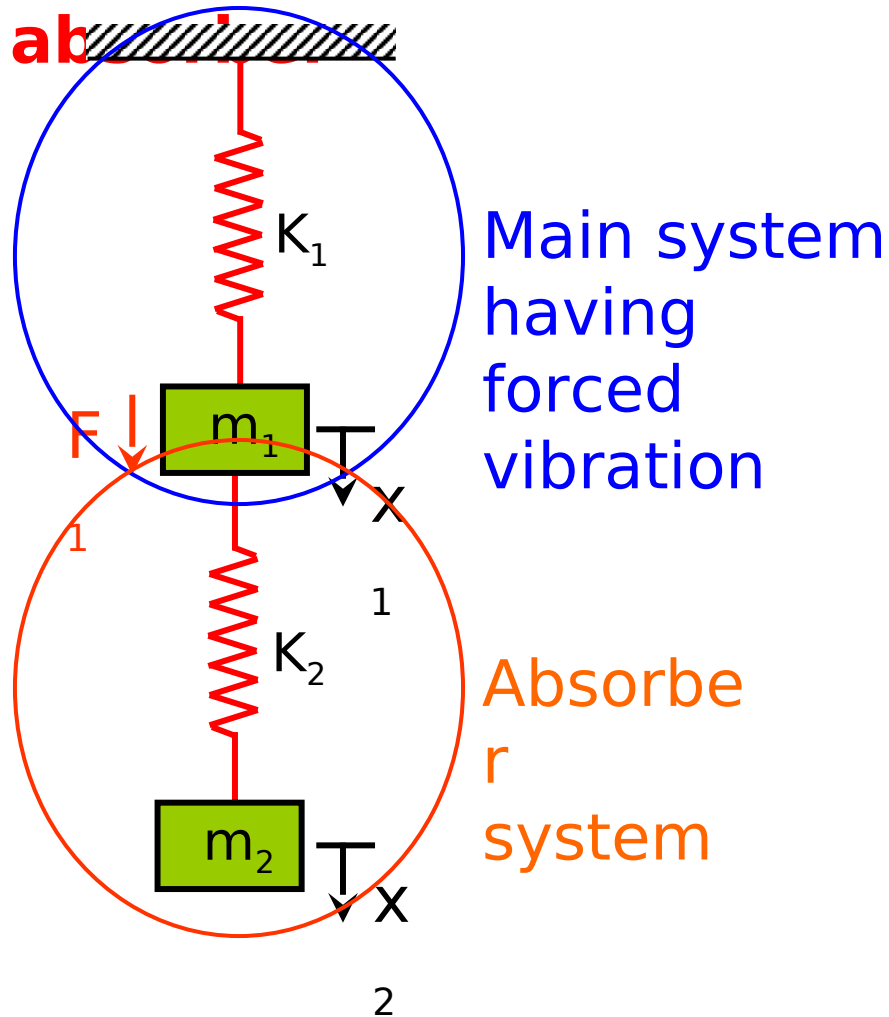

The system can be used as **Dynamic vibration absorber**

(Tuned damper)

Choose K_2 , m_2 such that vibrations of mass m_1 is minimized

Systems with two degree of freedom

Dynamic vibration absorber

Undesired maximum vibrations can occur only when main system is under resonance, or near it i.e $\omega \approx \omega_1$

So, to reduce undesired vibration of main system mass m_1 , we choose K_2 , m_2 in such a way that $\omega_1 = \omega_2$

$$\sqrt{\frac{K_1}{m_1}} = \sqrt{\frac{K_2}{m_2}} \quad \text{OR} \quad \frac{K_1}{m_1} = \frac{K_2}{m_2}$$