CCNP Security(300-715)SISE题库（2020.04.19）

Number: 350-715
Passing Score: 825
Time Limit: 140 min
File Version: v1.0

CCNP Security(300-715)SISE题库（2020.04.19）
Implementing and Configuring Cisco Identity Services Engine
CCNP题库战报QQ交流群：138131305
CCNP最新题库战报地址：http://bbs.hh010.com/forum-263-1.htm
下载官方正版题库、看最新考试战报，请随时关注 鸿鹄论坛 **http://bbs.hh010.com**
思科华为考试报名全国优惠，报名请联系鸿鹄全国区客服
QQ 613523101
QQ 613523103
QQ 613523105
QQ 613523107
QQ 613523108
QQ 613523109
鸿鹄论坛官方淘宝店铺：**http://hh010.taobao.com/**
鸿鹄论坛官方微信公众号：

QUESTION 1
Which two fields are available when creating an endpoint on the context visibility page of Cisco IS? (Choose two)

A. Policy Assignment
B. Endpoint Family
C. Identity Group Assignment
D. Security Group Tag
E. IP Address

鸿鹄论坛 bbs.hh010.com

Answer: AC

QUESTION 2
When configuring Active Directory groups, what does the Cisco ISE use to resolve ambiguous group names?

A. MIB
B. TGT
C. OMAB
D. SID

Answer: D

QUESTION 3
What is the purpose of the ip http server command on a switch?

A. It enables the https server for users for web authentication
B. It enables MAB authentication on the switch
C. It enables the switch to redirect users for web authentication.
D. It enables dot1x authentication on the switch.

Answer: C

QUESTION 4
What are two requirements of generating a single signing in Cisco ISE by using a certificate provisioning portal, without generating a certificate request? (Choose two)

A. Location the CSV file for the device MAC
B. Select the certificate template
C. Choose the hashing method
D. Enter the common name
E. Enter the IP address of the device

鸿鹄论坛 bbs.hh010.com

Answer: BD
Explanation:
https://www.cisco.com/c/en/us/support/docs/security/identity-services-engine/200534-ISE-2-0-Certificate-Provisioning-Portal.html

QUESTION 5

What service can be enabled on the Cisco ISE node to identity the types of devices connecting to a network?

A. MAB
B. profiling
C. posture
D. central web authentication

Answer: B

QUESTION 6
In which two ways can users and endpoints be classified for TrustSec? (Choose two)

A. VLAN
B. SXP
C. dynamic
D. QoS
E. SGACL

鸿鹄论坛
bbs.hh010.com

Answer: AE

QUESTION 7
What does the dot1x system-auth-control command do?

A. causes a network access switch not to track 802.1x sessions
B. globally enables 802.1x
C. enables 802.1x on a network access device interface
D. causes a network access switch to track 802.1x sessions

Answer: B
Explanation:
https://www.cisco.com/c/en/us/td/docs/switches/lan/catalyst4500/XE3-8-0E/15-24E/configuration/guide/xe-380-configuration/dot1x.html

QUESTION 8
Which command displays all 802 1X/MAB sessions that are active on the switch ports of a Cisco Catalyst switch?

A. show authentication sessions output
B. Show authentication sessions
C. show authentication sessions interface Gi 1/0/x
D. show authentication sessions interface Gi1/0/x output

Answer: B

QUESTION 9
What gives Cisco ISE an option to scan endpoints for vulnerabilities?

A. authorization policy

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

B. authentication policy
C. authentication profile
D. authorization profile

Answer: D

鸿鹄论坛 bbs.hh010.com

QUESTION 10
A network administrator has just added a front desk receptionist account to the Cisco ISE Guest Service sponsor group.
Using the Cisco ISE Guest Sponsor Portal, which guest services can the receptionist provide?

A. Keep track of guest user activities
B. Configure authorization settings for guest users
C. Create and manage guest user accounts
D. Authenticate guest users to Cisco ISE

Answer: C

QUESTION 11
Which interface-level command is needed to turn on 802 1X authentication?

A. Dofl1x pae authenticator
B. dot1x system-auth-control
C. authentication host-mode single-host
D. aaa server radius dynamic-author

Answer: B

QUESTION 12
Which permission is common to the Active Directory Join and Leave operations?

A. Create a Cisco ISE machine account in the domain if the machine account does not already exist
B. Remove the Cisco ISE machine account from the domain.
C. Set attributes on the Cisco ISE machine account
D. Search Active Directory to see if a Cisco ISE machine account already ex.sts.

Answer: D

QUESTION 13
Which two features must be used on Cisco ISE to enable the TACACS. feature? (Choose two)

A. Device Administration License
B. Server Sequence
C. Command Sets
D. Device Admin Service
E. External TACACS Servers

鸿鹄论坛 bbs.hh010.com

Answer: AD


QUESTION 14
During BYOD flow, from where does a Microsoft Windows PC download the Network Setup Assistant?

A. Cisco App Store
B. Microsoft App Store
C. Cisco ISE directly
D. Native OTA functionality


Answer: C

QUESTION 15
Drag and Drop Question

Drag the steps to configure a Cisco ISE node as a primary administration node from the left into the correct order on the night.

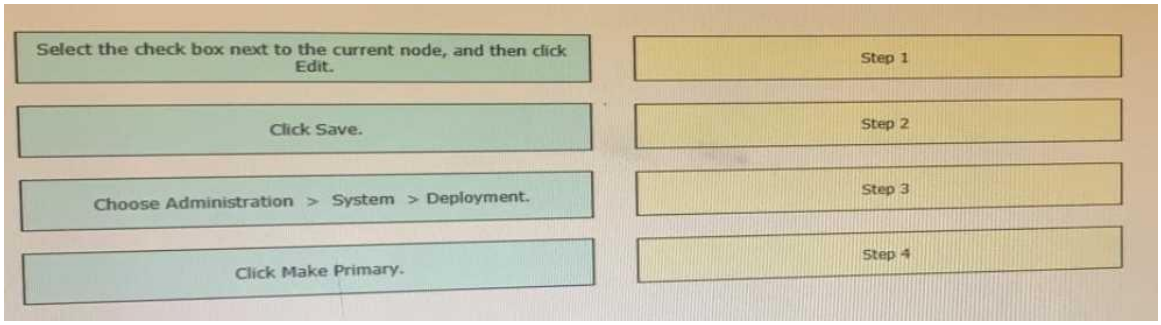

Answer:

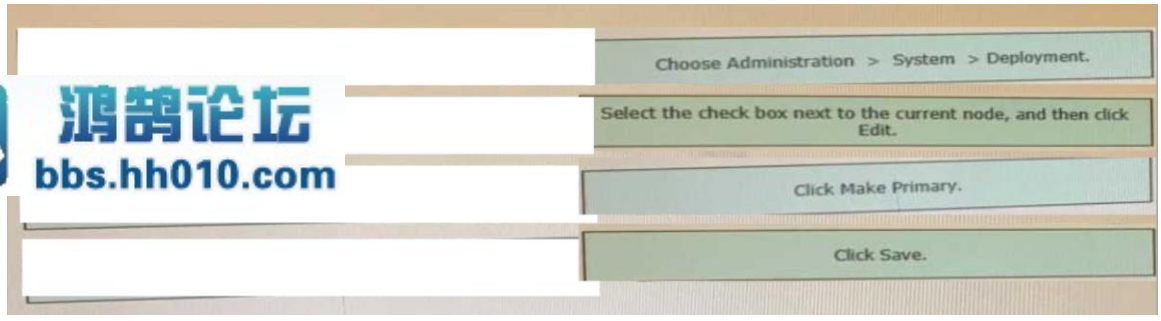

鸿鹄论坛
bbs.hh010.com

Explanation:
https://www.cisco.com/c/en/us/td/docs/security/ise/2-4/admin_guide/b_ise_admin_guide_24/b_ise_admin_guide_24_new_chapter_011.html
Step 1
Choose Administration > System > Deployment.
The Register button will be disabled initially. To enable this button, you must configure a Primary PAN.
Step 2
Check the check box next to the current node, and click Edit.
Step 3
Click Make Primary to configure your Primary PAN.
Step 4

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

Enter data on the General Settings tab.
Step 5
Click Save to save the node configuration.

QUESTION 16
What are two components of the posture requirement when configuring Cisco ISE posture? (Choose two)

A. updates
B. remediation actions
C. Client Provisioning portal
D. conditions
E. access policy

鸿鹄论坛
bbs.hh010.com

Answer: BD

QUESTION 17
What is a method for transporting security group tags throughout the network?

A. by enabling 802.1AE on every network device
B. by the Security Group Tag Exchange Protocol
C. by embedding the security group tag in the IP header
D. by embedding the security group tag in the 802.1Q header

Answer: B

QUESTION 18
Which two ports must be open between Cisco ISE and the client when you configure posture on Cisco ISE? (Choose two).

A. TCP 8443
B. TCP 8906
C. TCP 443
D. DTCP80
E. TCP 8905

Answer: AE

QUESTION 19
Which profiling probe collects the user-agent string?

A. DHCP
B. AD
C. HTTP
D. NMAP

Answer: C

QUESTION 20
Which supplicant(s) and server(s) are capable of supporting EAR-CHAINING?

A. Cisco AnyConnect NAM and Cisco Identity Service Engine
B. Cisco AnyConnect NAM and Cisco Access Control Server
C. Cisco Secure Services Client and Cisco Access Control Server
D. Windows Native Supplicant and Cisco Identity Service Engine

Answer: A

QUESTION 21
Which two values are compared by the binary comparison function in authentication that is based on Active Directory? (Choose Two)

A. subject alternative name and the common name
B. MS-CHAFV2 provided machine credentials and credentials stored in Active Directory
C. user-presented password hash and a hash stored in Active Directory
D. user-presented certificate and a certificate stored in Active Directory

Answer: AB
Explanation:
Basic certificate checking does not require an identity source. If you want binary comparison checking for the certificates, you must select an identity source. If you select Active Directory as an identity source, subject and common name and subject alternative name (all values) can be used to look up a user.
https://www.cisco.com/c/en/us/td/docs/security/ise/1-3/admin_guide/b_ise_admin_guide_13/b_ise_admin_guide_sample_chapter_01110.html

QUESTION 22
Which Cisco ISE component intercepts HTTP and HTTPS requests and redirects them to the Guest User Portal?

A. network access device
B. Policy Service node
C. Monitoring node
D. Administration node

鸿鹄论坛
bbs.hh010.com

Answer: A

QUESTION 23
What are two benefits of TACACS+ versus RADIUS for device administration? (Choose two)

A. TACACS+ supports 802.1X, and RADIUS supports MAB
B. TACACS+ uses UDP, and RADIUS uses TCP
C. TACACS+ has command authorization, and RADIUS does not.
D. TACACS+ provides the service type, and RADIUS does not
E. TACACS+ encrypts the whole payload, and RADIUS encrypts only the password.

Answer: CE

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

QUESTION 24
Client provisioning resources can be added into the Cisco ISE Administration node from which three of these? (Choose three.)

A. FTP
B. TFTP
C. www-cisco.com
D. local disk
E. Posture Agent Profile

Answer: CDE

QUESTION 25
How is policy services node redundancy achieved in a deployment?

A. by enabling VIP
B. by utilizing RADIUS server list on the NAD
C. by creating a node group
D. by deploying both primary and secondary node

Answer: D

QUESTION 26
If a user reports a device lost or stolen, which portal should be used to prevent the device from accessing the network while still providing information about why the device is blocked?

A. Client Provisioning
B. Guest
C. BYOD
D. Blacklist

Answer: D
Explanation:
https://www.cisco.com/c/en/us/td/docs/solutions/Enterprise/Borderless_Networks/Unified_Access/BY OD_Design_Guide/Managing_Lost_or_Stolen_Device.html#90273
The Blacklist identity group is system generated and maintained by ISE to prevent access to lost or stolen devices. In this design guide, two authorization profiles are used to enforce the permissions for wireless and wired devices within the Blacklist:
Blackhole WiFi Access
Blackhole Wired Access

QUESTION 27
A user reports that the RADIUS accounting packets are not being seen on the Cisco ISE server. Which command is the user missing in the switch's configuration?

A. radius-server vsa send accounting
B. aaa accounting network default start-stop group radius
C. aaa accounting resource default start-stop group radius
D. aaa accounting exec default start-stop group radios

Answer: A

QUESTION 28
Which two task types are included in the Cisco ISE common tasks support for TACACS+ profiles? (Choose two.)

A. Firepower
B. WLC
C. IOS
D. ASA
E. Shell

鸿鹄论坛
bbs.hh010.com

Answer: BE
Explanation:
https://www.cisco.com/c/en/us/td/docs/security/ise/2-1/admin_guide/b_ise_admin_guide_21/b_ise_admin_guide_20_chapter_0100010.html
TACACS+ Profile
TACACS+ profiles control the initial login session of the device administrator. A session refers to each individual authentication, authorization, or accounting request. A session authorization request to a network device elicits an ISE response. The response includes a token that is interpreted by the network device, which limits the commands that may be executed for the duration of a session. The authorization policy for a device administration access service can contain a single shell profile and multiple command sets. The TACACS+ profile definitions are split into two components:
Common tasks
Custom attributes
There are two views in the TACACS+ Profiles page (Work Centers > Device Administration > Policy Elements > Results > TACACS Profiles)--Task Attribute View and Raw View. Common tasks can be entered using the Task Attribute View and custom attributes can be created in the Task Attribute View as well as the Raw View.
The Common Tasks section allows you to select and configure the frequently used attributes for a profile. The attributes that are included here are those defined by the TACACS+ protocol draft specifications. However, the values can be used in the authorization of requests from other services. In the Task Attribute View, the ISE administrator can set the privileges that will be assigned to the device administrator. The common task types are:
Shell
WLC
Nexus
Generic
The Custom Attributes section allows you to configure additional attributes. It provides a list of attributes that are not recognized by the Common Tasks section. Each definition consists of the attribute name, an indication of whether the attribute is mandatory or optional, and the value for the attribute. In the Raw View, you can enter the mandatory attributes using a equal to (=) sign between the attribute name and its value and optional attributes are entered using an asterisk (*) between the attribute name and its value. The attributes entered in the Raw View are reflected in the Custom Attributes section in the Task Attribute View and vice versa. The Raw View is also used to copy paste the attribute list (for example, another product's attribute list) from the clipboard onto ISE. Custom attributes can be defined for nonshell services.

QUESTION 29
What allows an endpoint to obtain a digital certificate from Cisco ISE during a BYOD flow?

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

A. Network Access Control
B. My Devices Portal
C. Application Visibility and Control
D. Supplicant Provisioning Wizard

Answer: B

QUESTION 30
What occurs when a Cisco ISE distributed deployment has two nodes and the secondary node ,s deregistered?

A. The primary node restarts
B. The secondary node restarts.
C. The primary node becomes standalone
D. Both nodes restart.

Answer: D
Explanation:
https://www.cisco.com/c/en/us/td/docs/security/ise/1-1-1/installation_guide/ise_install_guide/ise_deploy.html
if your deployment has two nodes and you deregister the secondary node, both nodes in this primary- secondary pair are restarted. (The former primary and secondary nodes become standalone.)

QUESTION 31
Which port does Cisco ISE use for native supplicant provisioning of a Windows laptop?

A. TCP 8909
B. TCP 8905
C. CUDP 1812
D. TCP 443

Answer: A

QUESTION 32
Which of these is not a method to obtain Cisco ISE profiling data?

A. RADIUS
B. HTTP
C. SNMP query
D. active scans
E. Netflow
F. DNS

鸿鹄论坛
bbs.hh010.com

Answer: D

QUESTION 33
Which of the following is not true about profiling in Cisco ISE?

A. Profiling policies are automatically enabled for use.
B. Cisco ISE comes with predefined profiles.
C. The use of Identity Groups is required to leverage the use of profiling in the authorization policy.
D. Cisco ISE does not support hierarchy within the profiling policy.

Answer: D

QUESTION 34
Which two default endpoint identity groups does cisco ISE create? (Choose two)

A. Unknown
B. whitelist
C. end point
D. profiled
E. blacklist

Answer: ADE
Explanation:
Default Endpoint Identity Groups Created for Endpoints Cisco ISE creates the following five endpoint identity groups by default: Blacklist, GuestEndpoints, Profiled, RegisteredDevices, and Unknown. In addition, it creates two more identity groups, such as Cisco-IP-Phone and Workstation, which are associated to the Profiled (parent) identity group. A parent group is the default identity group that exists in the system.
https://www.cisco.com/c/en/us/td/docs/security/ise/2-4/admin_guide/b_ise_admin_guide_24/b_ise_admin_guide_24_new_chapter_010101.html#ID1678

QUESTION 35
Which Cisco ISE service allows an engineer to check the compliance of endpoints before connecting to the network?

A. personas
B. qualys
C. nexpose
D. posture

Answer: D
Explanation:
https://www.cisco.com/c/en/us/td/docs/security/ise/2-1/admin_guide/b_ise_admin_guide_21/b_ise_admin_guide_20_chapter_010110.html
Posture is a service in Cisco Identity Services Engine (Cisco ISE) that allows you to check the state, also known as posture, of all the endpoints that are connecting to a network for compliance with corporate security policies. This allows you to control clients to access protected areas of a network.

QUESTION 36
Which default endpoint identity group does an endpoint that does not match any profile in Cisco ISE become a member of?


A. Endpoint

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

B. unknown
C. blacklist
D. white list
E. profiled

Answer: B
Explanation:
If you do not have a matching profiling policy, you can assign an unknown profiling policy. The endpoint is therefore profiled as Unknown. The endpoint that does not match any profile is grouped within the Unknown identity group. The endpoint profiled to the Unknown profile requires that you create a profile with an attribute or a set of attributes collected for that endpoint.
https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_man_identities.html

QUESTION 37
Refer to the exhibit. Which command is typed within the CU of a switch to view the troubleshooting output?

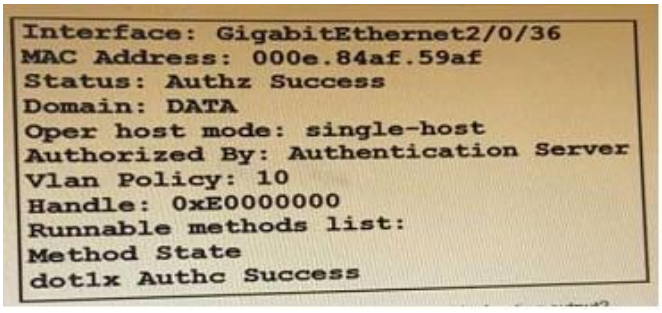

A. show authentication sessions mac 000e.84af.59af details
B. show authentication registrations
C. show authentication interface gigabitethemet2/0/36
D. show authentication sessions method

Answer: A

QUESTION 38
What must be configured on the Cisco ISE authentication policy for unknown MAC addresses/identities for successful authentication?

A. pass
B. reject
C. drop
D. continue

鸿鹄论坛
bbs.hh010.com

Answer: D
Explanation:
https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_man_id_stores.html

QUESTION 39
Which two probes must be enabled for the ARP cache to function in the Cisco ISE profile service so that a user can reliably bind the IP address and MAC addresses of endpoints? (Choose two.)

A. NetFlow
B. SNMP
C. HTTP
D. DHCP
E. RADIUS

Answer: DE
Explanation:
Cisco ISE implements an ARP cache in the profiling service, so that you can reliably map the IP addresses and the MAC addresses of endpoints. For the ARP cache to function, you must enable either the DHCP probe or the RADIUS probe. The DHCP and RADIUS probes carry the IP addresses and the MAC addresses of endpoints in the payload data. The dhcp-requested address attribute in the DHCP probe and the Framed-IP-address attribute in the RADIUS probe carry the IP addresses of endpoints, along with their MAC addresses, which can be mapped and stored in the ARP cache.
https://www.cisco.com/c/en/us/td/docs/security/ise/2-1/admin_guide/b_ise_admin_guide_21/b_ise_admin_guide_20_chapter_010100.html

QUESTION 40
Which RADIUS attribute is used to dynamically assign the Inactivity active timer for MAB users from the Cisco ISE node?

A. session timeout
B. idle timeout
C. radius-server timeout
D. termination-action

Answer: B
Explanation:
When the inactivity timer is enabled, the switch monitors the activity from authenticated endpoints. When the inactivity timer expires, the switch removes the authenticated session. The inactivity timer for MAB can be statically configured on the switch port, or it can be dynamically assigned using the RADIUS Idle-Timeout attribute

QUESTION 41
Which personas can a Cisco ISE node assume?

A. policy service, gatekeeping, and monitonng
B. administration, policy service, and monitoring
C. administration, policy service, gatekeeping
D. administration, monitoring, and gatekeeping

Answer: B
Explanation:
https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_dis_deploy.html
The persona or personas of a node determine the services provided by a node. An ISE node can assume any or all of the following personas: Administration, Policy Service, and Monitoring. The menu options that are available through the administrative user interface are dependent on the role and personas that an ISE node assumes. See Cisco ISE Nodes and Available Menu Options for more information.

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

QUESTION 42
What is a characteristic of the UDP protocol?

A. UDP can detect when a server is down.
B. UDP offers best-effort delivery
C. UDP can detect when a server is slow
D. UDP offers information about a non-existent server

Answer: B
Explanation:
https://www.cisco.com/c/en/us/support/docs/security-vpn/remote-authentication-dial-user-service-radius/13838-10.html

QUESTION 43
Which two endpoint compliance statuses are possible? (Choose two.)

A. unknown
B. known
C. invalid
D. compliant
E. valid

鸿鹄论坛
bbs.hh010.com

Answer: AD

QUESTION 44
Which are two characteristics of TACACS+? (Choose two) ,

A. It uses TCP port 49.
B. It combines authorization and authentication functions.
C. It separates authorization and authentication functions.
D. It encrypts the password only.
E. It uses UDP port 49.

Answer: AC

QUESTION 45
Which two ports do network devices typically use for CoA? (Choose two)

A. 443
B. 19005
C. 8080
D. 2799
E. 1700

Answer: DE

QUESTION 46
Which two responses from the RADIUS server to NAS are valid during the authentication

process? (Choose two)

A. access-response
B. access-request
C. access-reserved
D. access-accept
E. access-challenge

Answer: DE

QUESTION 47
Which two components are required for creating a Native Supplicant Profile within a BYOD flow? (Choose two)

A. Windows Settings
B. Connection Type
C. iOS Settings
D. Redirect ACL Operating System

Answer: AC

QUESTION 48
What is the minimum certainty factor when creating a profiler policy?

A. the minimum number that a predefined condition provides
B. the maximum number that a predefined condition provides
C. the minimum number that a device certainty factor must reach to become a member of the profile
D. the maximum number that a device certainty factor must reach to become a member of the profile

Answer: B

QUESTION 49
What must match between Cisco ISE and the network access device to successfully authenticate endpoints?

A. SNMP version
B. shared secret
C. certificate
D. profile

Answer: B
Explanation:
https://www.cisco.com/en/US/docs/security/ise/1.0/user_guide/ise10_man_network_devices.html

QUESTION 50
Which two methods should a sponsor select to create bulk guest accounts from the sponsor portal?

A. Random

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

B. Monthly
C. Daily
D. Imported
E. Known

鸿鹄论坛
bbs.hh010.com

Answer: AD

QUESTION 51
Which statement about configuring certificates for BYOD is true?

A. An Android endpoint uses EST, whereas other operating systems use SCEP for enrollment
B. The SAN field is populated with the end user name.
C. An endpoint certificate is mandatory for the Cisco ISE BYOD
D. The CN field is populated with the endpoint host name

Answer: C

QUESTION 52
What sends the redirect ACL that is configured in the authorization profile back to the Cisco WLC?

A. Cisco-av-pair
B. Class attribute
C. Event
D. State attribute

Answer: A

QUESTION 53
Which two events tngger a CoA for an endpoint when CoA is enab.ed globally for ReAuth? (Choose two.)

A. endpoint marked as lost in My Devices Portal
B. addition of endpoint to My Devices Portal
C. endpoint profile transition from Aop.e-dev.ee to App.e-iPhone
D. endpoint profile transition from Unknown to Windows 10-Workstation
E. updating of endpoint dACL.

Answer: CD

QUESTION 54
What is a requirement for Feed Service to work-?

A. TCP port 3080 must be opened between Cisco ISE and the feed server
B. Cisco ISE has a base license.
C. Cisco ISE has access to an internal server to download feed update
D. Cisco ISE has Internet access to download feed update

Answer: C

QUESTION 55
Which advanced option within a WLAN must be enabled to trigger Central Web Authentication for Wireless users on AireOS controller?

A. DHCP server
B. static IP tunneling
C. override Interface ACL
D. AAA override

Answer: D

QUESTION 56
What is a valid guest portal type?

A. Sponsored-Guest
B. My Devices
C. Sponsor
D. Captive-Guest

鸿鹄论坛
bbs.hh010.com

Answer: A

QUESTION 57
What is needed to configure wireless guest access on the network?

A. endpoint already profiled in ISE
B. WEBAUTH ACL for redirection
C. valid user account in Active Directory
D. Captive Portal Bypass turned on

Answer: D

QUESTION 58
The default Cisco ISE node configuration has which role or roles enabled by default?

A. Administration only
B. Inline Posture only
C. Administration and Pokey Service
D. Policy Service Monitoring, and Administration

Answer: D

QUESTION 59
What does MAB stand for?

A. MAC Address Binding
B. MAC Authorization Binding
C. MAC Authorization Bypass

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

D. MAC Authentication Bypass

Answer: D

QUESTION 60
What is the Cisco ISE default admin login name and password?

A. ISEAdmin/admin
B. admin/cisco
C. admin/no default password--the admin password is configured at setup
D. admin/admin

Answer: C

鸿鹄论坛
bbs.hh010.com

QUESTION 61
What is the condition that a Cisco ISE authorization policy cannot match?

A. company contact
B. custom
C. time
D. device type
E. posture

Answer: B

QUESTION 62
Which statement is not correct about the Cisco ISE Monitoring node?

A. The local collector agent collects logs locally from itself and from any NAD that is configured to send logs to the Policy Service node.
B. Cisco ISE supports distributed log collection across all nodes to optimize local data collection, aggregation, and centralized correlation and storage.
C. The local collector agent process runs only the Inline Posture node.
D. The local collector buffers transport the collected data to designated Cisco ISE Monitoring nodes as syslog; once Monitoring nodes are globally defined via Administration, ISE nodes automatically send logs to one or both of the configured Monitoring nodes.

Answer: C


QUESTION 63
The profiling data from network access devices is sent to which Cisco ISE node?

A. Monitoring node
B. Administration node
C. Inline Posture node
D. Policy Service node


Answer: D

QUESTION 64
Drag and Drop Question

Drag the Cisco ISE node types from the left onto the appropriate purposes on the right.

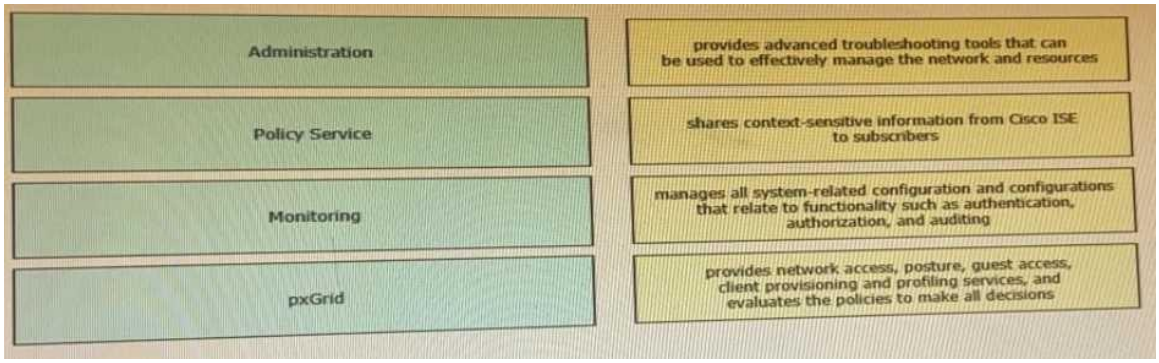

Answer:

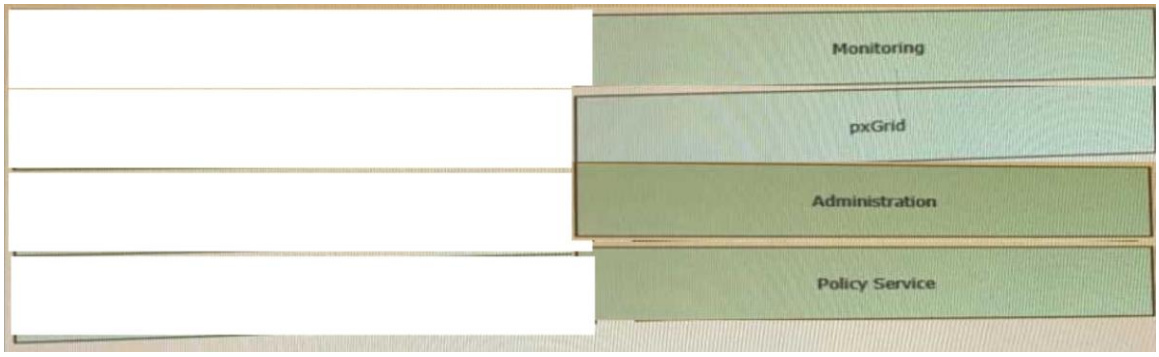

Explanation:
Monitoring = provides advanced monitoring and troubleshooting tools that you can use to effectively manage your network and resources
Policy Service = provides network access, posture, guest access, client provisioning, and profiling services. This persona evaluates the policies and makes all the decisions.
Administration = manages all system-related configuration and configurations that relate to functionality such as authentication, authorization, auditing, and so on
pxGrid = shares context-sensitive information from Cisco ISE to subscribers
https://www.cisco.com/c/en/us/td/docs/security/ise/1-4/admin_guide/b_ise_admin_guide_14/b_ise_admin_guide_14_chapter_011.html#ID57

QUESTION 65
Which configuration is required in the Cisco ISE authentication policy to allow Central Web Authentication?

A. MAB and if user not found, continue
B. MAB and if authentication failed, continue
C. Dot1x and if user not found, continue
D. Dot1x and if authentication failed, continue

鸿鹄论坛 bbs.hh010.com

Answer: A

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

QUESTION 66
Which portal is used to customize the settings for a user to log in and download the compliance module?

A. Client Profiling
B. Client Endpoint
C. Client Provisioning
D. Client Guest

Answer: C

QUESTION 67
Which term refers to an endpoint agent that tries to join an 802 1X-enabled network?

A. EAP server
B. supplicant
C. client
D. authenticator

Answer: D

QUESTION 68
Which two features are available when the primary admin node is down and the secondary admin node has not been promoted? (Choose two)

A. hotspot
B. new AD user 802 1X authentication
C. BYOD
D. guest AUP

Answer: BC

鸿鹄论坛
bbs.hh010.com

QUESTION 69
Which protocol must be allowed for a BYOD device to access the BYOD portal?

A. HTTP
B. SMTP
C. HTTPS
D. SSH

Answer: C

QUESTION 70
In which two ways can users and endpoints be classified for TrustSec? (Choose Two.)

A. VLAN
B. SXP

C. dynamic
D. QoS
E. SGACL

Answer: AE

QUESTION 71
Which types of design are required in the Cisco ISE ATP program?

A. schematic and detailed
B. preliminary and final
C. high-level and low-level designs
D. top down and bottom up

Answer: C

QUESTION 72
If there is a firewall between Cisco ISE and an Active Directory external identity store, which port does not need to be open?

A. UDP/TCP 389
B. UDP123
C. TCP 21
D. TCP 445
E. TCP 88

鸿鹄论坛 bbs.hh010.com

Answer: C

QUESTION 73
What are the three default behaviors of Cisco ISE with respect to authentication, when a user connects to a switch that is configured for 802.1X, MAB, and WebAuth? (Choose three)

A. MAB traffic uses internal endpoints for retrieving identity.
B. Dot1X traffic uses a user-defined identity store for retrieving identity.
C. Unmatched traffic is allowed on the network.
D. Unmatched traffic is dropped because of the Reject/Reject/Drop action that is configured under Options.
E. Dot1 traffic uses internal users for retrieving identity.

Answer: ADE

QUESTION 74
Which statement is true?

A. A Cisco ISE Advanced license is perpetual in nature.
B. A Cisco ISE Advanced license can be installed on top of a Base and/or Wireless license.
C. A Cisco ISE Wireless license can be installed on top of a Base and/or Advanced license.
D. A Cisco ISE Advanced license can be used without any Base licenses.

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/

Answer: B

QUESTION 75
In which scenario does Cisco ISE allocate an Advanced license?

A. guest services with dACL enforcement
B. endpoint authorization using SGA enforcement
C. dynamic device profiling
D. high availability Administrator nodes

鸿鹄论坛 bbs.hh010.com

Answer: C

QUESTION 76
Which Cisco ISE node does not support automatic failover?

A. Inline Posture node
B. Monitoring node
C. Policy Services node
D. Admin node

Answer: D

QUESTION 77
Which scenario does not support Cisco ISE guest services?

A. wired NAD with local WebAuth
B. wireless LAN controller with central WebAuth
C. wireless LAN controller with local WebAuth
D. wired NAD with central WebAuth

鸿鹄论坛 bbs.hh010.com

Answer: B

QUESTION 78
By default, which traffic does an 802.IX-enabled switch allow before authentication?

A. all traffic
B. no traffic
C. traffic permitted in the port dACL on Cisco ISE
D. traffic permitted in the default ACL on the switch

Answer: D

QUESTION 79
What does MAB leverage a MAC address for?

A. Calling-Station-ID
B. password
C. cisco-av-pair

D. username

Answer: D

QUESTION 80
Which three conditions can be used for posture checking? (Choose three.)

A. certificate
B. operating system
C. file
D. application
E. service

Answer: CDE

鸿鹄论坛
bbs.hh010.com

更多资源请访问鸿鹄论坛：http://bbs.hh010.com/