EBCS 1 Part 1-7

Ethiopian Building Code Standard – Based on European Norme

Actions on structures – Part 1-7: General actions –

Accidental actions

ONLY FOR REVIEW PURPOSE

© 2014 All rights reserved.
Ministry of Urban Development, Housing and Construction.

Ref. No. EBCS EN 1991-1-7:2014

Ethiopian Building Code Standard Revision Committee on "BASIS OF DESIGN AND ACTIONS ON STRUCTURES"

ONLY FOR REVIEW PURPOSE

Steering Committee Chair

Hailemeskel Tefera

Project Coordinator

Esayas Gebreyouhannes

Technical Committee Members

Bedilu Habte	**Chairman**
Wondimu Kassa	**Secretary**
Adil Zekaria	
Esayas Gebreyouhannes	
Fekadu Melese	

Editorial work assisted by:

Yisshak Taddesse

NATIONAL FOREWORD

The Proclamation to define the powers and duties of The Executive organs of The Federal Democratic Republic of Ethiopia Proclamation No 691/ 2010 and Ethiopian Building Proclamation No 624/2009 empowers the Ministry of Urban Development, Housing and Construction to prepare the Country's Building Code, issue Standards for design and construction works, and follow up and supervise the implementation of same.

This Ethiopian Standard is the official English language version of "BASIS OF STRUCTURAL DESIGN - **EBCS EN 1991-1-7:2014**". It supersedes part of "BASIS OF DESIGN AND ACTIONS ON STRUCTURES - EBCS-1 1995" which is withdrawn. With an eye on the latest technological advancements and trends worldwide and with the aim of bringing the Ethiopian Construction Standard at par with the present state-of-the-art, this edition has brought a major shift in terms of contents and comprehensiveness. Ethiopia is a signatory member of CEN/CENELEC to adopt European Standards in a similar fashion as the Members and Affiliates of CEN/CENELEC in which Ethiopia is bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving the basic framework of European Standard the status of a national standard without any alteration. The major benefits to be gained in applying these standards are the harmonization of professional practice and the ensuring of appropriate level of workmanship, level of safety and quality of construction work.

EBCS EN 1991-1-7:2014 is prepared based on EN 1991-1-7 by a Technical Committee "BASIS OF DESIGN AND ACTIONS ON STRUCTURES" the secretariat of which is held by Addis Ababa University. The document is intended to be used in conjunction with EBCS EN 1991:2014 to EBCS EN 1998:2014 for the structural design of buildings and civil engineering works, including geotechnical aspects, structural fire design, situations involving earthquakes, execution and temporary structures. The normative part of this Ethiopian Building Code Standard is chosen based on the local needs and construction practice. The range and possible choice are given in the normative text, and a Note will qualify it as a Nationally Determined Parameter (NDP) specific for the Ethiopian Construction industry. The NDPs can be a specific value for a factor, a specific level or class, a particular method or a particular application rule. In the current version of the Ethiopian Building Codes, the NDPs are mostly taken from the recommendations provided by the European Standards. To particularly determine the appropriate values, levels, methods and application conforming to our local conditions extensive and continuous research shall be conducted. In line with such rigorous approach, the NDPs will be published in a National Annex which will be incorporated by amendment into this Ethiopian Standard in due course, after public consultation has taken place for a grace period of one year. As this standard is technical document which, by their very nature, require periodic updating, revised edition will be issued by the Ministry from time to time as appropriate.

ONLY FOR REVIEW PURPOSE

This document does not purport to include all the necessary provisions of a contract. Users are responsible for their correct application.

Compliance with this Ethiopian Building Code Standard does not of itself confer immunity from legal obligations.

The Ministry of Urban Development Housing and Construction as mandated acknowledges this document as a national resource tool and reference document which comprises a front cover, an inside front cover, a title page, National foreword, Table of Contents, pages 1 to 56 and a back cover. This Ethiopian Construction Standard, having been prepared under the direction of the Ethiopian Building Proclamation No 624/2009, was published under the authority of the Ministry of Urban Development, Housing and Construction on 01 December 2014.

Ministry of Urban development, Housing and Construction

FDRE

ONLY FOR REVIEW PURPOSE

ONLY FOR REVIEW PURPOSE

Contents page

SECTION 1 GENERAL 1

1.1 Scope 1
1.2 Normative references 2
1.3 Assumptions 2
1.4 Distinction between principles and application rules 2
1.5 Terms and definitions 2
1.6 Symbols 3

SECTION 2 CLASSIFICATION OF ACTIONS 4

SECTION 3 DESIGN SITUATIONS 5

3.1 General 5
3.2 Accidental Design Situations due to Accidental Actions 5
3.3 Accidental Design situations – Consequences of Localised Failure 7
3.4 Strategies to be considered in regard to Accidental Design Situations 7

SECTION 4 IMPACT 9

4.1 Field of application 9
4.2 Representation of actions 9
4.3 Accidental actions caused by road vehicles 10
4.3.1 Impact on supporting substructures 10
4.3.2 Impact on horizontal structural elements (eg. bridge decks) 12
4.4 Accidental actions caused by fork lift trucks 15
4.5 Accidental actions caused by derailed rail traffic under or adjacent to structures 15
4.5.1 Structures spanning across or alongside operational railway lines 15
4.5.2 Structures located in areas beyond track ends 17
4.6 Accidental actions caused by ship traffic 17
4.6.1 General 17
4.6.2 Impact from river and canal traffic 18
4.6.3 Impact from seagoing vessels 20
4.7 Accidental actions caused by helicopters 22

SECTION 5 INTERNAL EXPLOSIONS 23

5.1 Field of application 23
5.2 Representation of action 23
5.3 Principles for design 24

ANNEX A (INFORMATIVE) ROBUSTNESS OF BUILDINGS - DESIGN FOR CONSEQUENCES OF LOCALISED FAILURE FROM AN UNSPECIFIED CAUSE 26

A1 Scope and field of application 26
A2 Introduction 26
A3 Consequences Classes of Buildings 26

ONLY FOR REVIEW PURPOSE

A4 Recommended Strategies **27**
A5 Effective horizontal ties **29**
A5.1 Framed Structures: 29
A5. 2 Load-bearing wall construction. 30
A6 Effective vertical ties **31**
A7 Nominal section of load-bearing wall **32**
A8 Key Elements **32**

ANNEX B (INFORMATIVE) GUIDANCE FOR RISK ANALYSIS **33**

B1 Introduction **33**
B2 Definitions **34**
B2.1 Acceptance criteria: 34
B2.2 Consequence: 34
B2.3 Hazard: 34
B2.4 Risk: 34
B2.5 Risk analysis: 34
B2.6 Risk evaluation: 34
B2.7 Safety management: 34
B2.8 Undesired event: 34
B3 Description of the scope of a risk analysis **34**
B4 Procedure and methods **35**
B5 Risk acceptance and mitigating measures **36**
B6 Presentation of results and conclusions **37**
B7 Applications to buildings and civil engineering structures **37**
B7.1 General 37
B7.2.1 General Format 39
B7.2.2 Application to impact from vehicles 40
B7.2.3 Application to impact from ships 42
B7.2.4 Application to impact from rail traffic 42

ANNEX C (INFORMATIVE) ADVANCED IMPACT DESIGN **45**

C.1 General **45**
C.2 Impact dynamics **45**
C.2.1 Hard Impact 45
C.2.2 Soft Impact 47
C.3 Impact from aberrant road vehicles **47**
C.4 Impact by ships **50**

ANNEX D (INFORMATIVE) INTERNAL EXPLOSIONS **53**

D1 Dust explosions in rooms and silos **53**
D2 Dust explosions in energy ducts **54**
D3 Gas and vapour/air explosions in rooms, closed sewage bassins **54**
D4 Natural gas explosions **54**
D5 Gas and vapour/air explosions in energy ducts **55**
D6 Explosions in road and rail tunnels **55**

ONLY FOR REVIEW PURPOSE

ONLY FOR REVIEW PURPOSE

SECTION 1 GENERAL

1.1 Scope

(1) EBCS EN 1991-1-7 provides rules for safeguarding buildings and other civil engineering works against accidental actions. For buildings, EBCS EN 1991-1-7 also provides strategies to limit the consequences of localised failure caused by an unspecified accidental event. The recommended strategies for accidental actions range from the provision of measures to prevent or reduce the accidental action to that of designing the structure to sustain the action.

In this context specific rules are given for accidental actions caused by impact and internal explosions. Localised failure of a building structure, however, may result from a wide range of events that could possibly affect the building during its lifespan. Such events may not necessarily be anticipated by the designer.

This Part does not specifically deal with accidental actions caused by external explosions, warfare and terrorist activities, or the residual stability of buildings or other civil engineering works damaged by seismic action or fire etc. However, for buildings, adoption of the robustness strategies given in Annex A for safeguarding against the consequences of localised failure should ensure that the extent of the collapse of a building, if any, will not be disproportionate to the cause of the localised failure.

This Part does not apply to dust explosions in silos (See EBCS EN 1991 Part 4), nor to impact from traffic travelling on the bridge deck or to structures designed to accept ship impact in normal operating conditions e.g. quay walls and breasting dolphins.

(2) The following subjects are dealt with in this European standard:

- definitions and symbols (section 1);
- classification of actions (section 2);
- design situations;
- impact
- explosions
- robustness of buildings – design for consequences of localized failure from an unspecified cause (informative annex A);
- guidance for risk analysis (informative annex B);
- advanced impact design (informative annex C);
- internal explosions (informative annex D).

ONLY FOR REVIEW PURPOSE

1.2 Normative references

(1)This Ethiopian standard incorporates by dated or undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to, or revisions of, any of these publications apply to this Ethiopian standard only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies (including amendments).

Note: The following European Standards which are published or in preparation are cited in normative clauses or in NOTES to normative clauses.

EBCS EN 1990	EBCS 0: Basis of Structural Design
EBCS EN 1991-1-1	EBCS 1: Actions on structures Part 1-1: densities, self-weight, imposed loads for buildings.
EBCS EN 1991-1-6	EBCS 1: Actions on Structure Part 1-6: Actions during execution
EBCS EN 1991-2	EBCS 1: Actions of structures Part 2: Traffic loads on bridges
EBCS EN 1991-4	EBCS 1: Actions on structures Part 4: Actions in soils and tanks
EBCS EN 1992	EBCS 2: Design of concrete structures
EBCS EN 1993	EBCS 3: Design of steel structures
EBCS EN 1994	EBCS 4: Design of composite steel and concrete structures
EBCS EN 1995	EBCS 5: Design of timber structures
EBCS EN 1996	EBCS 6: Design of masonry structures
EBCS EN 1997	EBCS 7: Geotechnical design
EBCS EN 1998	EBCS 8: Design of structures for earthquake resistance
EBCS EN 1999	EBCS 9: Design of aluminium structures

ONLY FOR REVIEW PURPOSE

1.3 Assumptions

(1)P The general assumptions given in EBCS EN 1990, clause 1.3 shall apply to this Part of EBCS EN 1991.

1.4 Distinction between principles and application rules

(1) P The rules given in EBCS EN 1990, clause 1.4 shall apply to this Part of EBCS EN 1991.

1.5 Terms and definitions

For the purposes of this Ethiopian standard, general definitions are provided in EBCS EN 1990 clause 1.5. Additional definitions specific to this Part are given below. Burning velocity rate of flame propagation relative to the velocity of the unburned dust, gas or vapour that is ahead of it

deflagration	propagation of a combustion zone at a velocity that is less than the speed of sound in the unreacted medium
detonation	propagation of a combustion zone at a velocity that is greater than the speed of sound in the unreacted medium
flame speed	speed of a flame front relative to a fixed reference point
flammable limits	minimum and maximum concentrations of a combustible material, in a homogeneous mixture with a gaseous oxidizer that will propagate a flame
venting panel	non-structural part of the enclosure (wall, floor, ceiling) with limited resistance that is intended to release the developing pressure from deflagration in order to reduce pressure on structural parts of the building.
robustness	the ability of a structure to withstand events like fire, explosions, impact or the consequences of human error, without being damaged to an extent disproportionate to the original cause.

1.6 Symbols

For the purpose of this Ethiopian standard, the following symbols apply (see also EBCS EN 1990).

K_G	deflagration index of a gas cloud
K_{St}	deflagration index of a dust cloud
P_{max}	maximum pressure developed in a contained deflagration of an optimum mixture
P_{red}	reduced pressure developed in vented enclosure during a vented deflagration
P_{stat}	static activation pressure that activates a vent closure when the pressure is increased slowly

ONLY FOR REVIEW PURPOSE

SECTION 2 CLASSIFICATION OF ACTIONS

(1) P For the assessment of accidental actions on the structure, the Principles and Application Rules in EBCS EN 1990 shall be taken into account. See also Table 2.1

Table 2.1 Clauses in EBCS EN 1990 specifically addressing accidental actions.

Section	Clause
Terms and definitions	1.5.2.5, 1.5.3.5, 1.5.3.15,
Symbols	1.6
Basic requirements	2.1 (5)
Design situations	3.2(2)P
Classifications of actions	4.1.1(1)P, 4.1.1(2), 4.1.1(8)
Other representative values of variable actions	4.1.3(1)P
Combination of actions for accidental design situations	6.4.3.3
Design values for actions in the accidental and seismic design situations	A1.3.2

(2)P Actions within the scope of this Part of EN1991 shall be classified as accidental actions in accordance with EBCS EN 1990 clause 4.11.

ONLY FOR REVIEW PURPOSE

SECTION 3 DESIGN SITUATIONS

3.1 General

(1) This Section concerns the accidental design situations that need to be considered in order to ensure that there shall be a reasonable probability that the damage to the structure from an exceptional cause will not be considered disproportionate to the original cause.

(2) Accidental design situations are classified in EBCS EN 1990, 3.2. These may include:

- events relating to accidental actions (eg explosions and impact).
- the occurrence of localised failure from an unspecified cause.

Note : These situations are illustrated in Figure 3.1.

(3) The events to be taken into account may be given in the National Annex, or agreed for an individual project with Client and the relevant authority. The selected design situation shall be sufficiently severe and varied so as to encompass a low but reasonable probability of occurrence.

(4) The representative value of an accidental action should be chosen such that for medium consequences there is an assessed probability less than '*p*' per year that this action, or one of higher magnitude, will occur on the structure.

Note 1: The value of ''*p*' shall be given in the National Annex. The recommended value is $1x10^{-4}$

Note 2: A severe possible consequence requires the consideration of extensive hazard scenarios, while less severe consequences allow less extensive hazard scenarios. Because the probability of occurrence of an accidental action and the probability distribution of its magnitude need to be determined from statistics and risk analysis procedures, nominal design values are commonly adopted in practice. Consequences may be assessed in terms of injury and death to people, unacceptable change to the environment or large economic losses for the society. See Annex B.

3.2 Accidental Design Situations due to Accidental Actions

(1) P Accidental actions shall be accounted for, when specified, in the design of a structure depending on:

- the provisions take for preventing or reducing the dangers involved,
- the probability of occurrence of the initiating event;
- the consequences of damage to and failure of the structure;
- the level of acceptable risk

Note 1: In practice, the occurrence and consequences of accidental actions can be associated with a certain risk level. If this level cannot be accepted, additional measures are necessary. A zero risk level, however, is unlikely to be reached and in most cases it is necessary to accept a certain level of residual risk. This final risk level will be determined by the cost of safety measures weighed against the perceived public reaction to the damage resulting from the accidental action, together with consideration of the economic consequences and the potential number of casualties involved. The risk should also be based on a comparison with risks generally accepted by society in comparable situations.

Note 2: Suitable risk levels may be given in the National Annex as non contradictory, complementary information

ONLY FOR REVIEW PURPOSE

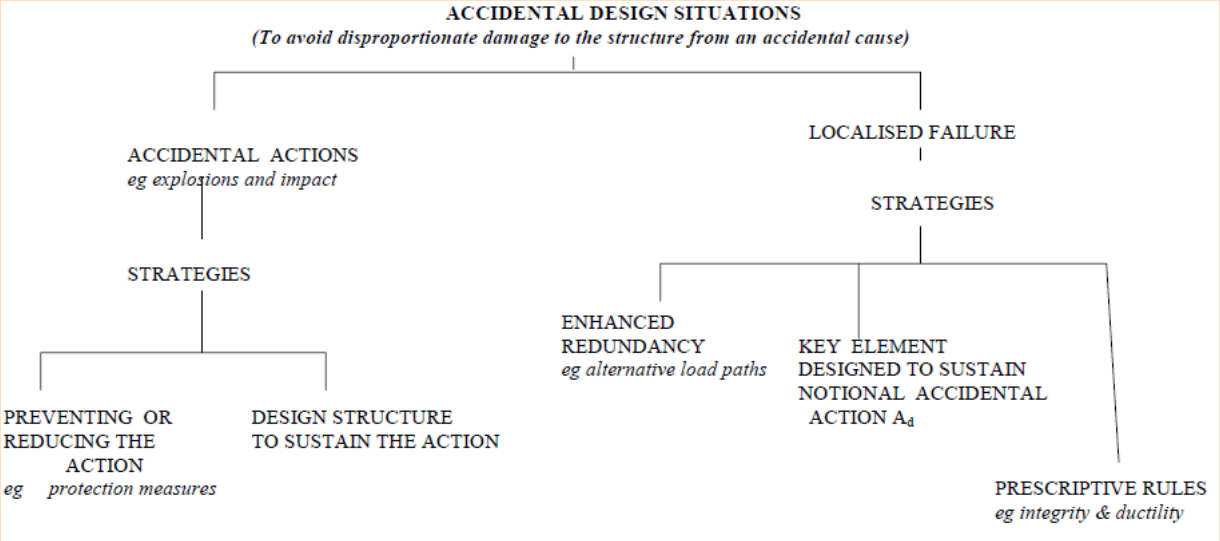


Figure 3.1: Accidental Design Situations

(2) Localised damage due to accidental actions may be acceptable, provided that it will not endanger the structure and that the overall load-bearing capacity is maintained during an appropriate length of time to allow necessary emergency measures to be taken.

(3) In the case of building structures such emergency measures may involve the safe evacuation of persons from the premises and its surroundings. In the case of bridge structures the survival period may be dependent on the period required to attend to casualties or to close the road or rail service.

(4) Measures to control the risk of accidental actions may include, as appropriate, one or more of the following strategies:

- preventing the action from occurring (eg. in the case of bridges, by providing adequate clearances between the vehicles and the structure) or reducing to a reasonable level the probability and/or magnitude of the action by applying the principles of capacity design (eg. providing sacrificial venting components with a low mass and strength to reduce the effect of explosions);
- protecting the structure against the effects of an action by reducing the actual loads on the structure (e.g. protective bollards or safety barriers) ;

Note 1: The effect of preventing actions may be limited; it is dependent upon factors which, over the life span of the structure, are commonly outside the control of the structural design process. Preventive measures often involves inspection and maintenance during the life of the structure.

- ensuring that the structure has sufficiently robustness by adopting one or more of the following approaches;

i) by designing certain key components of the structure on which its stability depends to be of enhanced strength so as to raise the probability of their survival following an accidental action.

ii) by designing structural members to have sufficient ductility capable of absorbing significant strain energy without rupture.

ONLY FOR REVIEW PURPOS

Note 2: Annexes A and C, together with EBCS EN 1992-1-1 to EBCS EN 1999-1-1, refer.

iii) by incorporating sufficient redundancy in the structure so as to facilitate the transfer of actions to alternative load paths following an accidental event.

(5)P The accidental actions shall be considered to act simultaneously in combination with other permanent and variable actions as given in EBCS EN 1990, 6.4.3.3.

Note 1: For values of ψ, see Table A1.1 in Annex A of EBCS EN 1990.

(6) P Where more onerous results are obtained by the omission of variable actions in whole, or in part, this should be taken into account. Consideration shall also be given to the safety of the structure immediately following the occurrence of the accidental event.

Note 1: This may include the consideration of progressive collapse. See Annex A.

3.3 Accidental Design situations – Consequences of Localised Failure

(1)P Consideration shall also be given to minimising the potential damage to the structure arising from an unspecified cause, taking into account its use and exposure, by adopting one or more of the following strategies.

- designing in such a way that neither the whole structure nor a significant part of it will collapse if a local failure (e.g. single element failure or damage) occurs;
- designing key elements, on which the structure is particularly reliant, to sustain a notional accidental action Ad;

Note 1: The National Annex may give the design value A_d. Recommended values are given in Annex A.

- applying prescriptive design/detailing rules that provide an acceptably robust structure (e.g. three-dimensional tying for additional integrity, or minimum level of ductility of structural elements subject to impact);

Note 2: This is likely to ensure that the structure has sufficient robustness regardless of whether a specific accidental action can be identified for the structure.

Note 3: The National Annex may state which of the strategies given in 3.3(1)P shall be considered for various structures. Recommendations relating to the use of the strategies for buildings are included in Annex A.

ONLY FOR REVIEW PURPOSE

3.4 Strategies to be considered in regard to Accidental Design Situations.

(1) Consequences classes may be defined as follows:

- Consequences class 1 Low;
- Consequences class 2 Medium;
- Consequences class 3 High.

Note 1: See also Annex B of EBCS EN 1990.

For facilitating the design of certain Class of structures it might be appropriate to treat some parts of the structure as belonging to a different class from overall structure. This might be the case for parts that are structurally separated and differ in exposure and consequences.

Note 2: The effect of preventive and/or protective measures is that the probability of damage to the structure is removed or reduced. For design purposes this can sometimes be taken into consideration by assigning the structure to a lower category class. In other cases a reduction of forces on the structure may be more appropriate.

Note 3: The National Annex may provide a classification of consequence classes according to a categorisation of structures and also the means of adopting the design approaches. A recommended classification of consequence classes relating to buildings is provided in Annex A.

(2) The different consequences classes may be considered in the following manner:

- Class 1: no specific consideration is necessary with regard to accidental actions except to ensure that the robustness and stability rules given in EBCS EN 1991 to EN1999, as applicable, are adhered to;

- Class 2 structure. depending upon the specific circumstances of the structure, a simplified analysis by static equivalent action models may be adopted or prescriptive design/detailing rules may be applied;

- Class 3: an examination of the specific case should be carried out to determine the level of reliability required and the depth of structural analyses. This may necessitate a risk analysis and use of refined methods such as dynamic analyses, non-linear models and load structure interaction, if considered appropriate.

Note 1: The National annex may give, as non conflicting, complementary information, appropriate design approach classes for different consequence classes of structure.

Note 2: In exceptional circumstances the complete collapse of the structure due to an accidental action may be the preferred option.

ONLY FOR REVIEW PURPOSE

SECTION 4 IMPACT

4.1 Field of application

(1) This section defines actions due to impact for:

- collisions from vehicles (excluding collisions on lightweight structures);
- collisions from fork lift trucks;
- collisions from trains;
- collisions from ships;
- the hard landing of helicopters on roofs.

NOTE 1 Accidental actions on lightweight structures which are excluded from the field of application above (e.g. gantries, lighting columns, footbridges) will be included in the National Annex, as non contradictory complementary information..

NOTE 2 For impact loads on kerbs and parapets, see EBCS EN 1991–2.

NOTE 3 The National Annex may give guidance on issues concerning the transmission of impact forces to the foundations as non contradictory complementary information. See EBCS EN 1990, 5.1.3 (4). (2) Buildings to be considered are parking garages, buildings in which vehicles or fork lift trucks are driven and buildings that are located in the vicinity of either road or railway traffic.

(3) For bridges the actions due to impact to be considered depends upon the type of traffic under the bridge and the consequences of the impact. In the case of footbridges, gantries, lighting columns etc., the horizontal static equivalent design forces may be given as non conflicting, complementary information in the National Annex

(4) Actions due to impact from helicopters need to be considered only for those buildings where the roof contains a designated landing pad.

ONLY FOR REVIEW PURPOSE

4.2 Representation of actions

(1) P Actions due to impact shall be considered as free actions. The areas where actions due to impact need to be considered shall be specified individually depending on the cause.

(2) In general, the impact process is determined by the impact velocity of the impacting object and the mass distribution, deformation behaviour, damping characteristics of both the impacting object and the structure. To find the forces at the interface, the interaction between the impacting object and the structure should be considered.

(3) When defining the material properties of the impacting body and of the structure, upper or lower characteristic values should be used, where relevant; strain rate effects should be taken into account, when appropriate.

(4) For structural design purposes the actions due to impact may be represented by an equivalent static force giving the equivalent action effects in the structure. This simplified model may be used for the verification of static equilibrium or for strength verifications, depending on the protection aim.

(5) For structures which are designed to absorb impact energy by elastic-plastic deformations of members (so called soft impact), the equivalent static loads may be determined by considering both plastic strength and deformation capacity of such members.

Note: for further information see Annex C

(6) For structures for which the energy is mainly dissipated by the impacting body (so called hard impact), the dynamic or equivalent static forces may conservatively be taken from clauses 4.3 to 4.7.

Note: for information on design values for masses and velocities of colliding objects as a basis for dynamic analysis: see Annex C.

4.3 Accidental actions caused by road vehicles

4.3.1 Impact on supporting substructures

(1) In the case of hard impact, design values for the equivalent static actions due to impact on the supporting substructure (e.g. columns and walls under bridges) in the vicinity of various types of roads may be obtained from Table 4.3.1.

Note 1: For impact from traffic on bridges, reference is made to EBCS EN 1991-2.

ONLY FOR REVIEW PURPOSE

Table 4.3.1: Horizontal static equivalent design forces due to impact on members supporting structures over or near roadways.

Type of traffic under the bridge	Type of vehicle	Force $F_{d,x}$ [kN]	Force $F_{d,y}$ [kN]
Motorway	Lorry	1000-2500	500-1250
Country road (<80 km/hr)	Lorry	750-2500	375-1250
Urban area (<60 km/hr)	Lorry	500-2500	250-1250
Court yards and parking garages (<20 km/hr)	Accessible to: – Cars – Lorry	 50-100 150-300	 25-50 75-150

Note 1: x = direction of normal travel, y = perpendicular to the direction of normal travel.

Note 2: The National Annex may prescribe the force as a function of the distance of the relevant traffic lanes to the structural element. Information on the effect of the distance s, where applicable, can be found in Annex C.

Note 3: The National Annex may give a choice of the values depending on the consequences of the impact and also prescribe the force as a function of the distance of the relevant traffic lanes to the structural element, taking account of the type of traffic carried on the bridge, and/or including the effect of protecting structures possibly affording only partial protection. The lower values are recommended for the general case and in the absence of further indications.

Note 4: The values in the table are applicable to normally exposed structural elements; in special cases for category 3 types of structures (see section 3) a more advanced analysis as indicated in Annex C might be more appropriate. In particular Annex C gives information on design velocities, duration of the loads and the effect of the distance from the road to the structural element. In the cases where an energy absorbing protection system is present, the forces on the structure may be reduced. Reference is made to Annex C for guidance on the amount of this reduction and the design of an appropriate protection system.

ONLY FOR REVIEW PURPOSE

(4) The forces $F_{d,x}$ and $F_{d,y}$ need not be considered simultaneously.

(5) For car impact on the supporting sub-structures the resulting collision force F should be applied at 0.5 m above the level of the driving surface (see Figure 4.3.1). The recommended force application area is 0.25 m (height) by 1.50 m (width) or the member width, whichever is the smaller.

Note 1: The measures for impact from lorries may be chosen from the National Annex. The recommended measures are as follows:

For impact from lorries on the supporting sub-structure the resulting collision force F should be applied at any height between 0.5-1.5 m above the level of the carriageway (see Figure 4.3.1) or greater where a protective barrier is provided. The force application area is 0.5 m (height) by 1.50 m (width) or the member width, whichever is the smaller.

Table 4.3.2: Impact loads on horizontal structural members above roadways

Type of traffic	Type of vehicle	Force $F_{d,x}$ [kN]	Force $F_{d,y}$ [kN]
Motorway	Lorry	1000-2000	500-1000
Country road (<80 km/hr)	Lorry	750-2000	375-1000
Urban area (<60 km/hr)	Lorry	500-2000	250-1000
Court yards and parking garages (<20 km/hr)	Lorry	150-300	75-150

Note 1: $_x$ = direction of normal travel, y = perpendicular to the direction of normal travel.

Note 2: The National Annex may give a choice of the values depending on the consequences of the impact, taking account of the type of traffic under the bridge, and/or including the effect of protection measures. The lower values are recommended for the general case and in the absence of further indications.

Note 3: The forces $F_{d,x}$ and $F_{d,y}$ need not be considered simultaneously

Note 4: The application area for the impact force may be taken as 0.25 m (height) by 0.25 m (width).

4.3.2 Impact on horizontal structural elements (eg. bridge decks)

(1) Actions due to impact loads from lorries and/or loads carried by the lorries on horizontal structural elements (eg. bridge decks) above roadways need only be considered, when adequate values for clearances or other suitable protection measures to avoid impact are not provided.

Note 1: Adequate values for clearances and suitable protection measures to avoid impact may be given in the National Annex. The recommended value for adequate clearance, excluding future re-surfacing of the carriageway under the bridge, to avoid impact is 6.0m.

(2) In cases where verification of static equilibrium or strength or deformation capacity are required for impact loads from lorries on horizontal structural elements (eg. bridge decks) above roadways, the rules may be given in the National Annex.

Note 1: The recommended rules are as follows.

- On vertical surfaces the design impact loads are equal to those impact values given in Table 4.3.2, multiplied by a probability factor r (see Figure 4.3.3);
- On the underside surfaces the same impact loads as above with an upward inclination of 10^{o} should be considered (see Figure 4.3.2);
- In determining the value of h allowance should be made for any possible future reduction caused by the resurfacing of the carriageway under the bridge.
- The force application area may be taken as 0.25 m (height) by 0.25 m (width).

Note 2: Information on the effect of the distance s can be found in Annex C.

ONLY FOR REVIEW PURPOSE

Note 3: The value of probability factor r should be based on impact accidental data for other existing structures. In the absence of such data the recommended value is given in Figure 4.3.3.

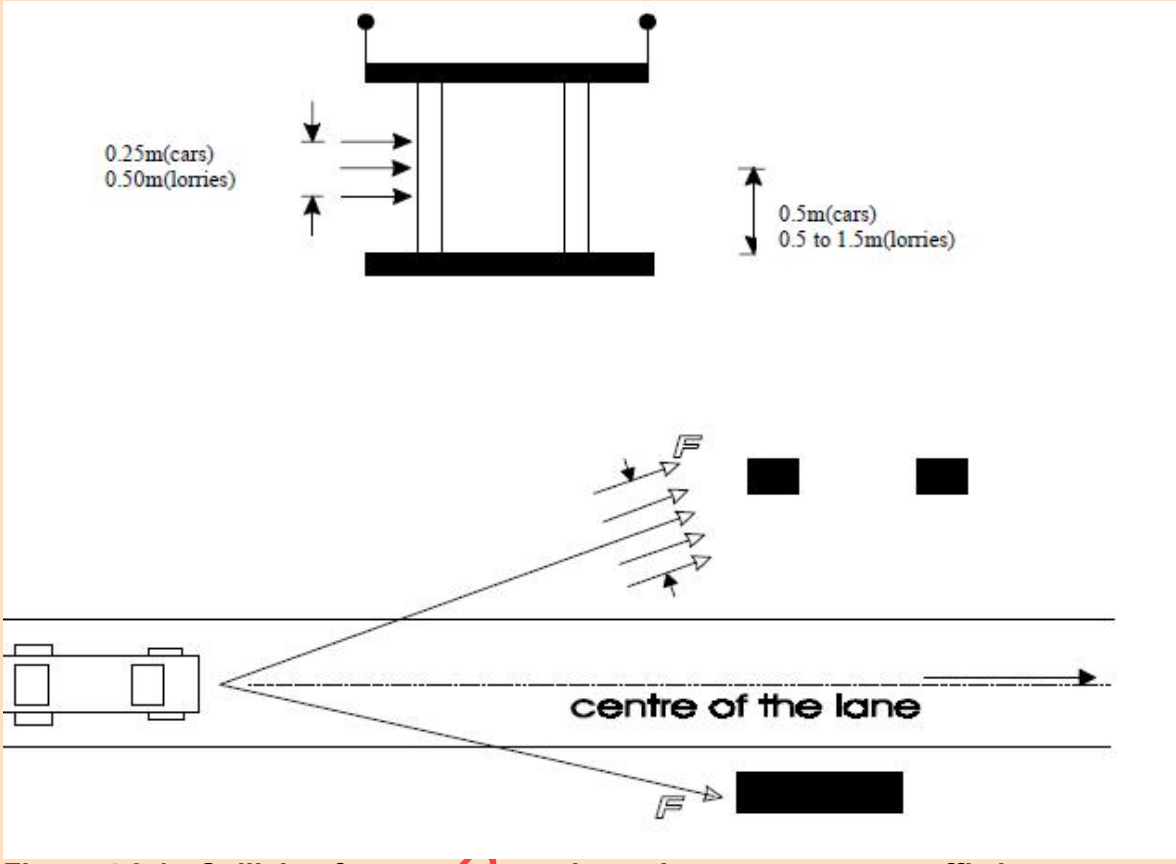


Figure 4.3.1: Collision force on supporting substructures near traffic lanes

ONLY FOR

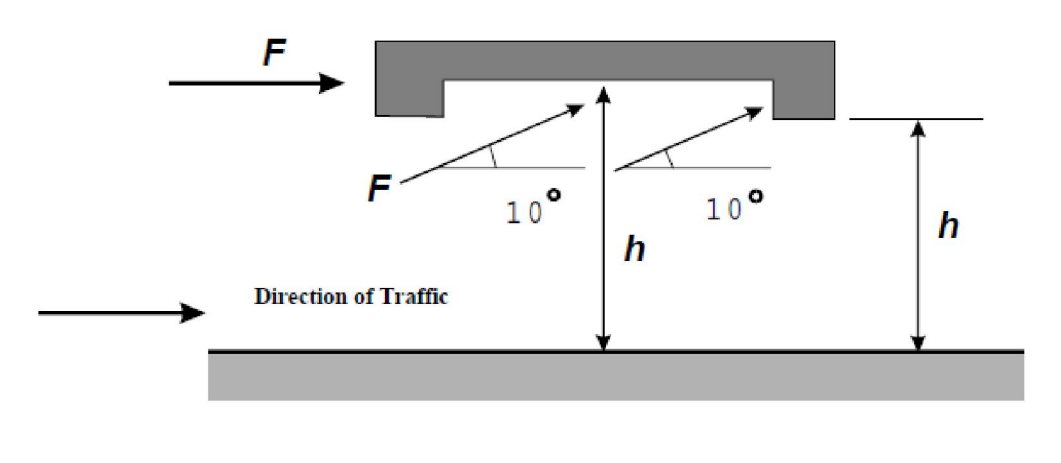


Figure 4.3.2: Collision force on horizontal structural elements (i.e bridge decks) above roadways

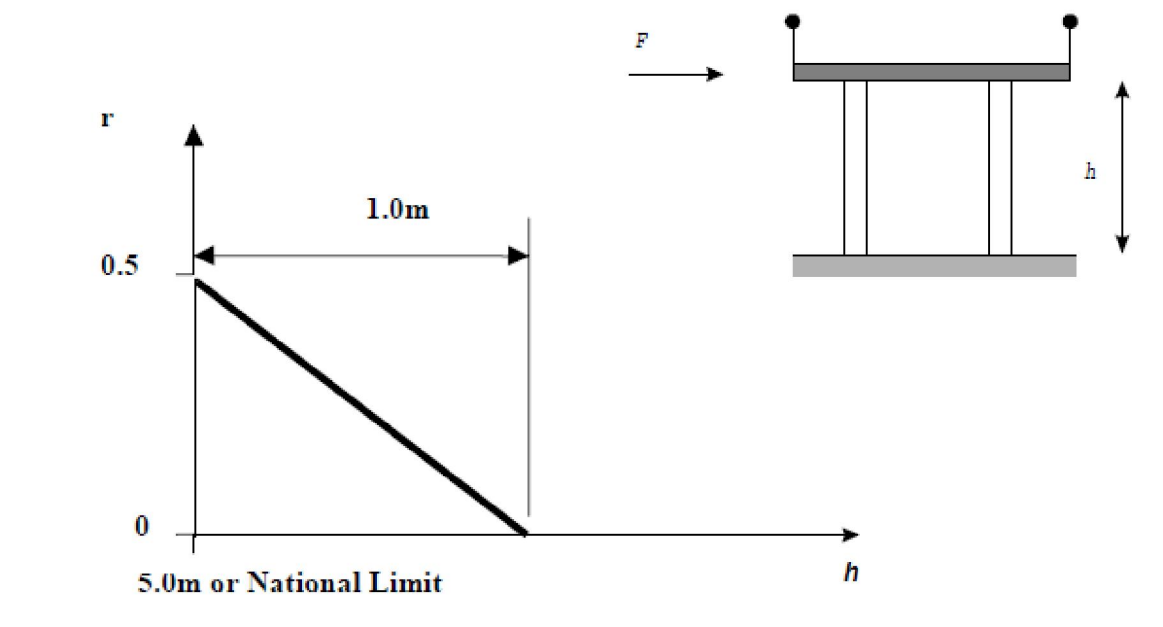


Figure 4.3.3: Value of the factor r for collision forces on horizontal structural elements above roadways, depending on the free height *h*

4.4 Accidental actions caused by fork lift trucks

(1) For buildings where fork lift trucks are present on a regular basis, the dynamic behaviour of the impacting fork lift truck and the hit structure under non-linear deformation should be considered so as to determine the impact force.

Note 1: Simplifications according to advanced impact design for soft impact are possible (see Annex C) to determine static equivalent forces F.

Note 2: The National Annex may give the choice of static equivalent force F and the height of application. The following values are recommended:

A horizontal static equivalent design force $F = 5W$, where W is the weight of a loaded truck, should be taken into account at a height of 0.75 m above floor level.

Note 3: Deformable elements, i.e. guard rails, may help protecting the supporting structure in case of lacking bearing capacity and have to be designed.

4.5 Accidental actions caused by derailed rail traffic under or adjacent to structures

4.5.1 Structures spanning across or alongside operational railway lines

4.5.1.1 Introduction

(1) This section sets out rules for derailment actions on supports from derailed trains under or adjacent to structures. The section also sets out other appropriate measures (both preventative and protective) to reduce as far as is reasonably practicable the effects of an accidental impact from a derailed vehicle against supports of structures located above or adjacent to the tracks and supports carrying superstructures. The specific recommendations are dependant on the classification of the structure.

Note 1: Derailment actions from rail traffic on bridges carrying rail traffic are specified in EBCS EN 1991-2.

4.5.1.2 Classification of structures

(1) P Structures shall be classified according to Table 4.5.1.

Table 4.5.1 Classes of structures subject to impact from derailed traffic

Class A	Structures that span across or neat to the operational railway that are either permanently occupied or serve as a temporary gathering place for people or consist of more than one storey.
Class B	Massive structures that span across the operational railway such as bridges carrying vechicular traffic or single storey buildings that are not permanently occupied or do not serve at a temporary gathering place for people.

Note 1: The National Annex should specify the Class of structures to be included in each consequences class (See clause 3.4).

Note 2: The National Annex may specify (as non conflicting, complementary information) the classification of temporary structures such as temporary footbridges or similar structures used by the public as well as auxiliary construction works (Part 1-6 of EN1991 refers).

ONLY FOR REVIEW PURPOSE

4.5.1.3 Accidental Design Situations in relation to the classes of structure

(1) Derailment of rail traffic under or on the approach to a structure classified as Class A or B should be considered as an accidental design situation.

(2) Impact on the superstructure (deck structure) from derailed rail traffic under or on the approach to a structure need not generally be considered.

4.5.1.4 Class A structures

(1) For class A structures, where the maximum line speed at the site is less than or equal to 120km/h, design values for the static equivalent forces due to impact on supporting structural elements (e.g. columns, walls) should be specified.

Note: The static equivalent loads and their identification may be given in the National Annex. Table 4.5.2 gives recommended values.

Table 4.5.2: Horizontal static equivalent design forces due to impact for class A structures over or alongside railways

Distance "*s*" from structural elements to the centreline of the nearest track (m)	**Force $F_{d,x}$ (kN)**	**Force $F_{d,y}$ (kN)**
Structural elements : s < 3 m	To be specified for the particular project. Further information is set out in Annex B.8	To be specified for the particular project. Further information is set out in Annex B.8
For continuous walls and wall type structures : 3 m ≤ s ≤ 5 m	4000	1500
S > 5 m	0	0
Note : x = track direction; y = perpendicular to track direction.		

ONLY FOR REVIEW PURPOSE

(2) For supports that are protected by solid plinths or platforms etc., the value of forces given in Table 4.5.2 may be reduced. Details of possible reductions may be given in the National Annex.

(3) The forces $F_{d,x}$ and $F_{d,y}$ should be applied at a level of 1.8 m above track level and the design should consider each load case separately.

(4) If the maximum line speed at the site is lower or equal to 50km/h, the values of the forces in Table 4.5.2 may be reduced by half. Further information is set out in Annex B7.

(5) Where the maximum permitted line speed at the site is greater than 120 km/h, the values of the horizontal static equivalent design forces together with additional preventative and/or protective measures should be specified in the National Annex or for the particular project.

Note : Information may be given in the National Annex or for the individual project. Further information is given in Annex B7.

4.5.1.5 Class B structures

(1) For Class B structures, particular requirements should be specified.

Note: Information may be given in the National Annex or for the individual project. The particular requirements may be based on a risk assessment. Information on the factors and measures to consider is given in Annex C4.1.

4.5.2 Structures located in areas beyond track ends

(1) Overrunning of rail traffic beyond the end of a track or tracks (for example at a terminal station) should be considered as an Accidental Design Situation when the structure or its supports are located in the area immediately beyond the track ends.

Note: The area to be considered as immediately beyond track ends will be specified in the National Annex.

(2) The measures to manage the risk should be based on the utilisation of the area immediately beyond the track end and may take into account any measures taken to reduce the likelihood of an overrun of rail traffic.

(3) Supports to structures should generally not be located in the area immediately beyond the track ends.

(4) Where supports are required to be located near to track ends, an end impact wall should be specified in addition to any buffer stop.

Note: Particular measures and alternative design values for the static equivalent force due to impact may be specified in the National Annex or for the individual project. The recommended design values for the static equivalent force due to impact on the end impact wall is F_{dx} = 5 000 kN for passenger trains and $F_{d,x}$ = 10 000 kN for shunting and marshalling trains. These forces should be applied horizontally and at a level of 1.0 m above track level.

4.6 Accidental actions caused by ship traffic

4.6.1 General

(1) The characteristics to be considered for collisions from ships depend upon the type of waterway, the flood conditions, the type and draught of vessels and their impact behaviour and the type of the structures and their energy dissipation characteristics. The types of vessels that can be expected should be classified according to standard ship characteristics, see Tables 4.6.1 and 4.6.2.

(2) The impact action is represented by two mutually exclusive load arrangements:

- a frontal force F_{dx} acting in the longitudinal axis of the pier;
- a lateral force F_{dy} acting normal to the longitudinal axis of the pier and a friction force FR parallel to the longitudinal axis.

The frontal and the lateral force act perpendicular to the surface under consideration.

(3) For ship impact forces hydrodynamic added mass should be taken into account.

ONLY FOR REVIEW PURPOSE

4.6.2 Impact from river and canal traffic

(1) For a number of standard ship characteristics and standard design situations, the recommended frontal and lateral dynamic forces are given in Table 4.6.1. In harbours the forces given in Table 4.6.1 may be reduced by a factor of 0.5.

ONLY FOR REVIEW PURPOSE

Table 4.6.1 Ship characteristics and corresponding dynamic design forces for inland waterways

CEMT[1)] Class	Reference type of ship	Length (m)	Mass m (ton)	Force F_{dx} (kN)	Force F_{dy} (kN)
I		30-50	200-400	2000	1000
II		50-60	400-650	3000	1500
III	"Gustav König"	60-80	650-1000	4000	2000
IV	Class „Europe"	80-90	1000-1500	5000	2500
Va	Big ship	90-110	1500-3000	8000	3500
Vb	Tow + 2 barges	110-180	3000-6000	10000	4000
Via	Tow + 2 barges	110-180	3000-6000	10 000	4 000
Vib	Tow + 4 barges	110-190	6000-12000	14 000	5 000
Vicc	Tow + 6 barges	190-280	10000-18000	17 000	8 000
VII	Tow + 9 barges	300	14000-27000	20 000	10 000

Note 1: CEMT: Ethiopian Conference of Ministers of Transport, classification proposed 19 June 1992, approved by the Council of Ethiopian Union 29 October 1993.

Note 2: The mass m in tons (1ton=1000kg) includes the total weight of the vessel, including the ship structure, the cargo and the fuel. It is often referred to as the displacement tonnage. It does not include the added hydraulic mass.

Note 3: For ships of other mass refer to Annex C.

Note 4: The forces F_{dx} and F_{dy} include the effects of added hydraulic mass.

Note 4: National values of frontal and lateral dynamic values may be given in the National Annex.

ONLY FOR REVIEW PURPOSE

(2) The friction impact force acting simultaneous with the lateral impact shall be calculated by

$$F_R = fF_{dy} \tag{4.6.1}$$

where

f = 0.4 is the friction coefficient.

(3) The impact forces shall be applied at a height above the maximum navigable water level depending on the ships draught (loaded or in ballast). In the absence of detailed Information, the force shall be applied at a height of 1.50 m above the relevant water level. An impact area b x h or b_{pier} x 0.5 m for frontal impact and b x h = 1.0 m x 0.5 m for lateral impact can be assumed.

(4) In the absence of a structural dynamic analysis a dynamic amplification factor should be used of 1.3 for frontal impact and 1.7 for lateral impact.

Note: For information on dynamic ship impact analysis, see Annex C.

(5) Under certain conditions it may be necessary to assume that the ship is lifted over an abutment or foundation block prior to colliding with columns.

(6) The superstructure of a bridge (the deck) should be designed to sustain an equivalent static force in any longitudinal direction if higher forces are not to be expected.

Note: The National Annex may provide a value for the equivalent static force. The recommended value is 1MN.

4.6.3 Impact from seagoing vessels

(1) The recommended frontal dynamic impact forces are given in Table 4.6.2. In harbours the forces given in Table 4.6.2 may be reduced by a factor of 0.5.

ONLY FOR REVIEW PURPOSE

Table 4.6.2 Ship characteristics and corresponding nominal dynamic design forces for sea waterways

Class of ship	**Length *l*** (m)	**Mass *m*** (ton)	**Force F_{dx}** (kN)	**Force F_{dy}** (kN)
Small	50	3 000	4 000	2000
Medium	100	10 000	15 000	7000
Large	200	40 000	75 000	37000
Very large	300	100 000	200 000	100000

Note 1: The forces given correspond to a velocity of about 2.0 m/s.

Note 2: National values of dynamic design forces may be given in the National Annex.

Note 3: Interpolation of the above values is permitted.

Note 4: The forces F_{dx} and F_{dy} include the effects of added hydraulic mass.

Note 5: The mass m in tons (1ton=1000kg) includes the total weight of the vessel, including the ship structure, the cargo and the fuel. It is often referred to as the displacement tonnage. It does not include the added hydraulic mass.

(2) In the absence of a dynamic analysis, a frontal impact factor of 1.3 and a lateral impact factor of 1.7 is recommended

(3) Bow, stern and broad side impact should be considered where relevant; for side and stern impact the forces given in Tables 4.6.2 may be multiplied by a factor of 0.3.

(4) Bow impact should be considered for the main sailing direction with a maximum deviation of 30^{o}.

(5) The frictional impact force acting simultaneously with the lateral impact shall be calculated by:

$$F_R = fF_{dy} \tag{4.6.2}$$

where:

f is the friction coefficient, $f = 0.4$.

(6) The point of impact depends upon the geometry of the structure and the size of the vessel. The impact area is 0.05/ high and 0.1/ broad, unless the structural element is smaller (/ = ship length).

Note: As a guideline the most unfavourable mid impact point may be taken as ranging from 0.05l below to 0.05/ above the design water levels (see Figure 4.6.2).

(7) The forces on a superstructure depend upon the height of the structure and the type of ship to be expected. In general the force on the superstructure of the bridge will be limited by the yield strength of the ships' superstructure.

Note: A range of 5 to 10 percent of the bow impact force may be considered as a guideline.

ONLY FOR REVIEW PURPOSE

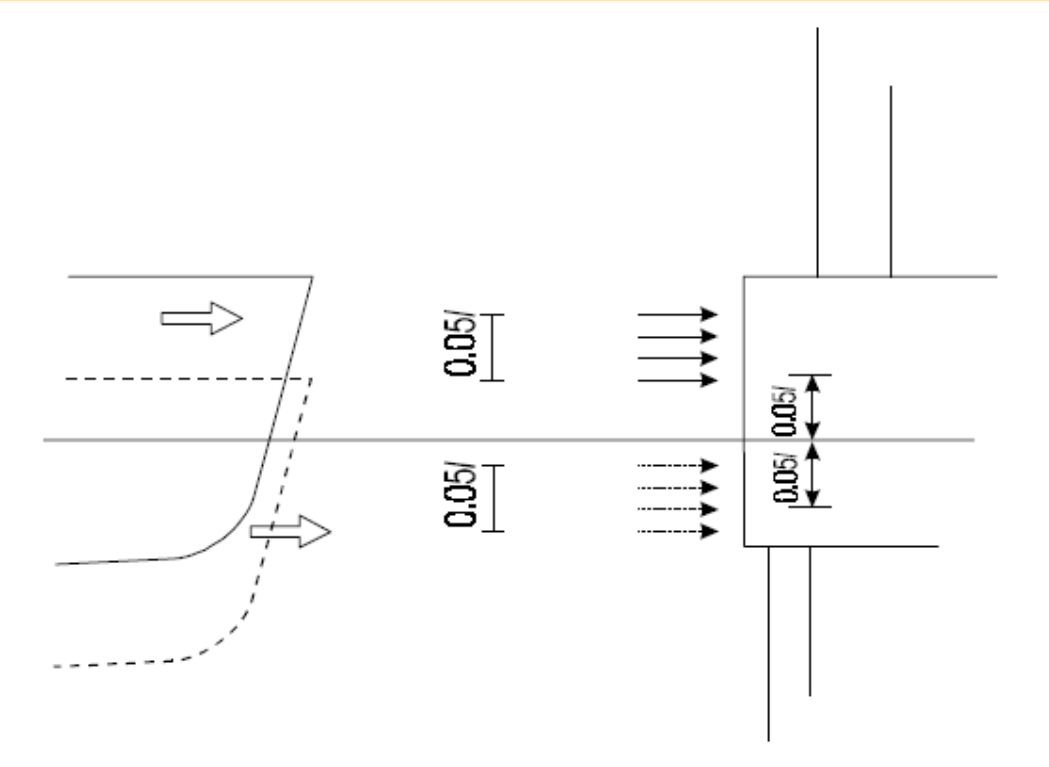


Figure 4.6.2: Possible impact areas for ship collision

ONLY FOR REVIEW

4.7 Accidental actions caused by helicopters

(1) If the roof of a building has been designated as a landing pad for helicopters, a heavy emergency landing force should be considered, the vertical static equivalent design force F_d being equal to:

$$F_d = C\sqrt{m} \tag{4.71}$$

where:

C is 3 kN $kg^{-0.5}$

m is the mass of the helicopter kg.

(2) The force due to impact should be considered to act on any part of the landing pad as well as on the roof structure within a maximum distance of 7 m from the edge of the landing pad. The area of impact may be taken as 2 m x 2 m.

SECTION 5 INTERNAL EXPLOSIONS

5.1 Field of application

(1) Explosions shall be considered in all parts of the building where gas is burned or regulated or where otherwise explosive material such as explosive gases or liquids forming explosive vapour or gas being stored. Solid high explosives are not covered in this code.

(2) Dust, gas or vapour explosions shall be considered for design purposes unless the probability is acceptably low that such dust, gas or vapour could ever be present within the building.

(3) This section defines actions due to internal explosions of

- dust explosions in rooms and silos
- dust explosions in energy ducts
- gas and vapour explosions in rooms and closed sewage basins
- gas and vapour explosions in energy ducts
- gas and vapour explosions in road and rail tunnels

(4) Construction works to be considered are chemical facilities, sewage works, buildings with piped gas installations or canister gas, energy ducts, road and rail tunnels.

5.2 Representation of action

(1) In this context an explosion is defined as a rapid chemical reaction of dust, gas or vapour in air. It results in high temperatures and high overpressures. Explosion pressures propagate as pressure waves.

(2) The pressure generated by an internal explosion depends primarily on the type of dust, gas or vapour, the percentage of dust, gas or vapour in the air and the uniformity of dust, gas or vapour air mixture, the ignition source, the presence of obstacles in the enclosure, the size and shape of the enclosure in which the explosion occurs, and the amount of venting or pressure release that may be available.

(3) Explosion pressures on the structural elements should be estimated taking into account, as appropriate, reactions transmitted to the structural elements by non-structural elements.

(4) Due allowance should be made for probable dissipation of dust, gas or vapour throughout the building, for venting effects, for the geometry of the room or group of rooms under consideration etc.

(5) Design situations classified as Category 1 (see section 3): no specific consideration of the effects of an explosion is necessary other than complying with the rules for connections and interaction between components provided in EBCS EN 1992 to EBCS EN 1999.

ONLY FOR REVIEW PURPOSE

(6) Design situations classified as Category 2 or 3: key elements of the structure shall be designed to resist actions either using analysis based upon equivalent static load models or by applying prescriptive design/detailing rules.

(7) For structures in Category 2, for a single room event, an equivalent static load model analysis of key elements of a structure may be carried out using either the procedures described in 5.3(3).

Note: alternatively one may use the strategies for damage due to local failure from any undefined cause as outlined in Annex A.

(8) For structures in Category 3 it is recommended to consider the use of dynamic analysis as described in Annex B.

(9) Advanced design for explosions may include one or several of the following aspects:

- explosion pressure calculations, including the effects of confinements and breaking panels;
- dynamic non linear structural calculations;
- probabilistic aspects and analysis of consequences;
- economic optimisation of mitigating measures.

5.3 Principles for design

(1) Progressive collapse of all kinds of structures due to an internal explosion shall not be possible. Elements which are not key elements may fail; key elements may be damaged so long as they retain their structural integrity.

(2) To reduce confined explosion pressures and to limit the consequences of explosions the following guidelines may be applied:

- the structure capable of resisting the maximum explosion overpressure;
- use of venting panels with defined venting pressures;
- separation of sections of the structure with explosion risks from other sections;
- limiting the area of sections with explosion risks;
- dedicated protective measures between sections with explosion risks from other sections to avoid explosion and pressure propagation.

Note: The estimated peak pressures may be higher than the values presented in Annex D of this part, but these can be considered in the context of a maximum load duration of 0.2 s and plastic ductile material behaviour (assuming appropriate detailing of connections to ensure ductile behaviour).

(3) The explosive pressure acts effectively simultaneously on all of the bounding surfaces of the enclosure.

(4) Vents should be placed close to possible ignition source if known or at turbulence-producing devices. They should discharge to a location that cannot endanger personnel. The vent panel must be restrained such that not becoming a missile in case of explosion.

ONLY FOR REVIEW PURPOSE

(5) The venting openings should be initiated by a low pressure and should be as light as possible. If windows are used no danger to persons from gas fragments or other structural elements should result.

(6) Reaction forces due to venting should be taken into account by dimensioning the support elements.

(7) After the positive phase of the explosion (with an overpressure), a second phase follows with an underpressure. For relevant structures this effect has to be considered in the design.

ONLY FOR REVIEW PURPOSE

ANNEX A
(INFORMATIVE)
ROBUSTNESS OF BUILDINGS - DESIGN FOR CONSEQUENCES OF LOCALISED FAILURE FROM AN UNSPECIFIED CAUSE

A1 Scope and field of application

(1) This Annex A provides rules and methods for designing buildings to sustain an extent of localised failure from an unspecified cause without disproportionate collapse. Adoption of this strategy is likely to ensure that the building is sufficiently robust to sustain a limited extent of damage or failure, depending on the Consequences Class (See 3.4), without collapse.

A2 Introduction

(1) Designing the building such that neither the whole building nor a significant part of it will collapse if localised damage were sustained, is an acceptable strategy, as stated in Section 3, for ensuring that the building is sufficiently robust to survive a reasonable range of undefined accidental actions.

(2) The minimum period that a building needs to survive following an accident should be that needed to facilitate the safe evacuation and rescue of personnel from the building and its surroundings. Longer periods of survival may be required for buildings used for handling hazardous materials, provision of essential services, or for national security reasons.

A3 Consequences Classes of Buildings

(1) Table A1 provides a recommended categorisation of building types/occupancies to consequence classes. This categorisation relates to the low, medium and high consequences classes given under 3.4 (1).

ONLY FOR PREVIEW PURPOSE

Table A1 Recommended categories on Consequences Classes

Class	Building Type and Occupancy
1	Single occupancy houses not exceeding 4 storeys. Agricultural buildings. Buildings into which people rarely go, provided no part of the building in closet to another building, or area where people do go, than a distance of 1 ½ time the building height.
2 Lower Risk group	5 storey single occupancy house. Hotels not exceeding 4 storeys. Flats, apartments and other residential buildings not exceeding 4 storeys. Office not exceeding 4 storeys Industrial buildings not exceeding 3 storeys Relating premises not exceeding 3 storeys of less than 1000m^2 Floor area in each storey. Single storey Educational buildings
2 Upper Risk Group	Hotels, flats, apartments and other residential buildings greater than 4 storey's but not exceeding 15 storeys. Educational buildings greater than single storey but not exceeding 15 storeys. Retailing premises greater than 3 storey's but not exceeding 15 storeys. Hospitals not exceeding 3 storeys. Offices greater than 4 storey's but not exceeding 15 storeys. All buildings to which members of the public are admitted in significant numbers and which contain floor areas not exceeding 1000 m^2 at each storey. Non-automatic car parking not exceeding 6 storeys. Automatic car parking not exceeding 15 storeys. Leisure Centers less than 2000m^2
3	All buildings defined above as Class 2 Lower and Upper Consequences Class that exceed the limits on area and number of storeys. All buildings to which members of the public are admitted in significant numbers. Stadia accommodating more than 5000 people Leisure Centers greater than 2000m^2

ONLY FOR REVIEW PURPOSE

Note 1: For buildings intended for more than one type of use the "Consequences Class" should be that pertaining to the most onerous type.

Note 2: In determining the number of storeys basement storeys may be excluded provided such basement storeys fulfil the requirements of "Consequences Class 2 Upper Group".

A4 Recommended Strategies

(1) Adoption of the following recommended strategies should ensure that the building will have an acceptable level of robustness to sustain localised failure without a disproportionate level of collapse.

a) For buildings in Consequences Class 1:

Provided the building has been designed and constructed in accordance with the rules given in EBCS EN1992 to 1999 for satisfying stability in normal use, no further specific consideration is necessary with regard to accidental actions from unidentified causes.

b) For buildings in Consequences Class 2 (Lower Group):

Provide effective horizontal ties, or effective anchorage of suspended floors to walls, as defined in A6.1 and A6.2 respectively for framed and load-bearing wall construction.

c) For buildings in Consequences Class 2 (Upper Group):

In addition to the recommended strategies for Consequences Class 1, the provision of:

- horizontal ties, as defined in A.5.1 and A.5.2 respectively for framed and load-bearing wall construction (see 1.5.11), together with vertical ties, as defined in A.6, in all supporting columns and walls should be provided, or alternatively,

- ensure that upon the notional removal of each supporting column and each beam supporting a column, or any nominal section of load-bearing wall as defined in A8 below, (one at a time in each storey of the building) that the building remains stable and that any local damage does not exceed a certain limit.

Note 1: The limit of admissible local damage may be specified in the National Annex. This may be different for each type of building. The recommended value is 15% of the floor in each of 2 adjacent storeys. See Figure A1.

Where the notional removal of such columns and sections of walls would result in an extent of damage in excess of the above limit, or other such limit specified in the National Annex, then such elements should be designed as a "key element". See A8.

In the case of buildings of load-bearing wall construction, the notional removal of a section of wall, one at a time, is likely to be the most practical strategy to adopt.

d) For Buildings in Consequences Class 3:

A systematic risk analysis of the building should be undertaken taking into account all the normal hazards that may reasonably be foreseen, together with any abnormal hazards.

Note 1: The National Annex may give the hazards to be taken into account.

Note 2: Guidance on the preparation of a risk analysis is included in Annex B.

ONLY FOR REVIEW PURPOSE

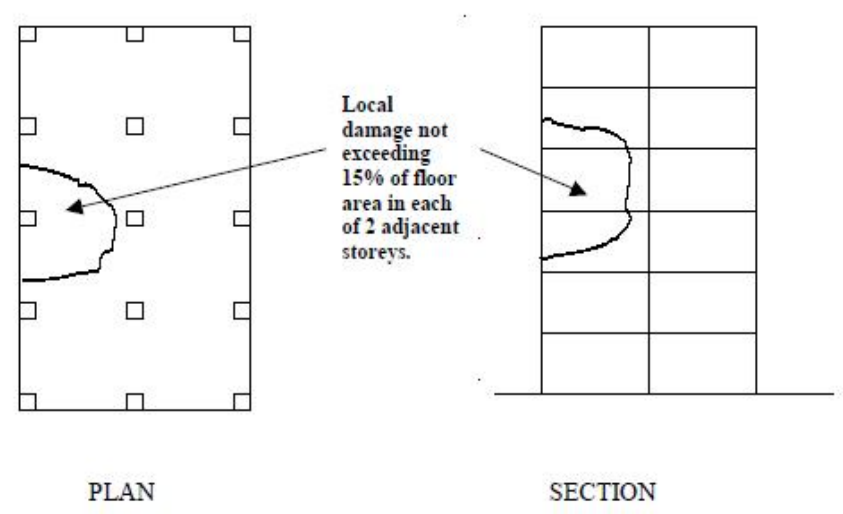


Figure A1 – Recommended Limit of admissible damage

ONLY FOR REVIEW PURPOSE

A5 Effective horizontal ties

A5.1 Framed Structures:

(1) Effective horizontal ties should be provided around the perimeter of each floor and roof level and internally in two right angle directions to tie the column and wall elements securely to the structure of the building. The ties should be continuous and be arranged as closely as practicable to the edges of floors and lines of columns and walls. At least 30% of the ties should be located within the close vicinity of the lines of columns and walls.

Note: See example in Figure A2.

2) Effective horizontal ties may comprise rolled steel sections, steel bar reinforcement in concrete slabs, or steel mesh reinforcement and profiled steel sheeting in composite steel/concrete floors (if directly connected to the steel beams with shear connectors). The ties may consist of a combination of the above types.

3) Each continuous tie, including its end connections, should be capable of sustaining a design tensile load of "Ti" for the accidental limit state in the case of internal ties, and "Tp", in the case of perimeter ties, equal to the following values:


for internal ties, $T_i = 0.8(g_k + \psi q_k)sL$ or 75kN, whichever the greater.

for perimeter ties $T_p = 0.4(g_k + \psi q_k)sL$ or75kN, whichever the greater.

Where:
s = the spacing of ties.
L = the span of the tie.
ψ = combination factor according to the accidental load combination.

Note: See example in Figure A2.

4) Members used for sustaining non-accidental loading may be utilized for the above tie without consideration of the combination of actions as given in EBCS EN 1990.

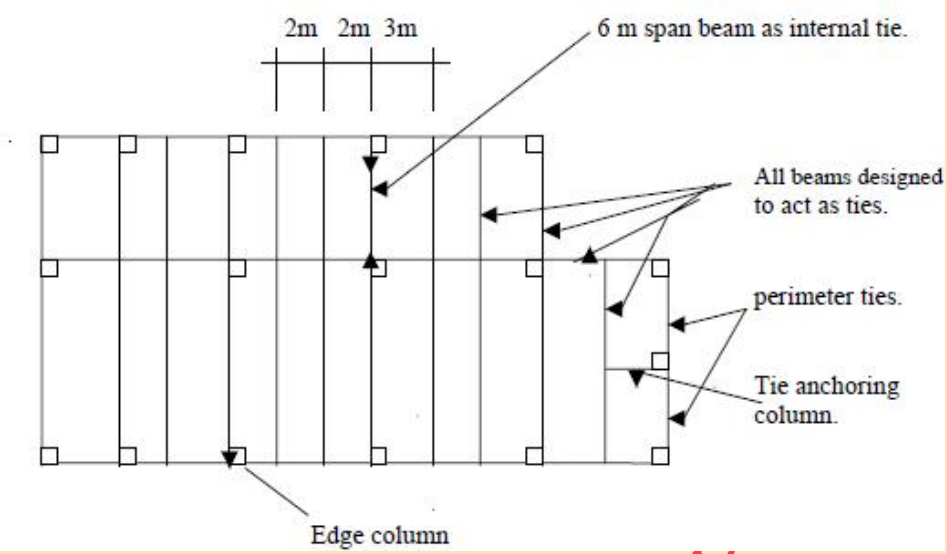

Note: Example of calculating the accidental design tensile force Ti in 6m span beam.

Characteristic loading: q_k =5.0kN/m^2 and g_k=3.0kN/m^2

$$T_i = 0.8(3.00 + 1.0 \times 5.00)\frac{3+2}{2} \times 6.0 = 96kN$$ (being greater than 75kN)

Figure A2 – Example of effective horizontal typing of a 6 storey framed office building.

ONLY FOR REVIEW PURP

A5. 2 Load-bearing wall construction.

(1) For Class 2 buildings (Lower Group)

Provide robustness by adopting a cellular form of construction designed to facilitate interaction of all components including an appropriate means of anchoring the floor to the walls.

(2) For Class 2 buildings (Upper Group)

Provide continuous effective horizontal ties in the floors. These should be internal ties distributed throughout the floors in both orthogonal directions and peripheral ties extending around the perimeter of the floor slabs within a 1.2m width of slab. The design tensile load in the ties should be determined as follows:

For internal ties T_I = the greater of F_t kN/m or $\frac{F_t(g_k + \psi q_k)}{7.5}\frac{z}{5} kN/m$

Where :

F_t = 60 kN/m or 20 + 4n_s kN/m, whichever is less.
n_s = the number of storeys.
z = the lesser of the

- greatest distance in meters in the direction of the tie, between the centers of the columns or other vertical loadbearing members whether this distance is spanned by a single slab or by a system of beams and slabs;
- or, 5 times the clear storey height H.

For peripheral ties $T_p = F_t$

Where F_t = 60kN or 20 + 4n_s kN, whichever is less

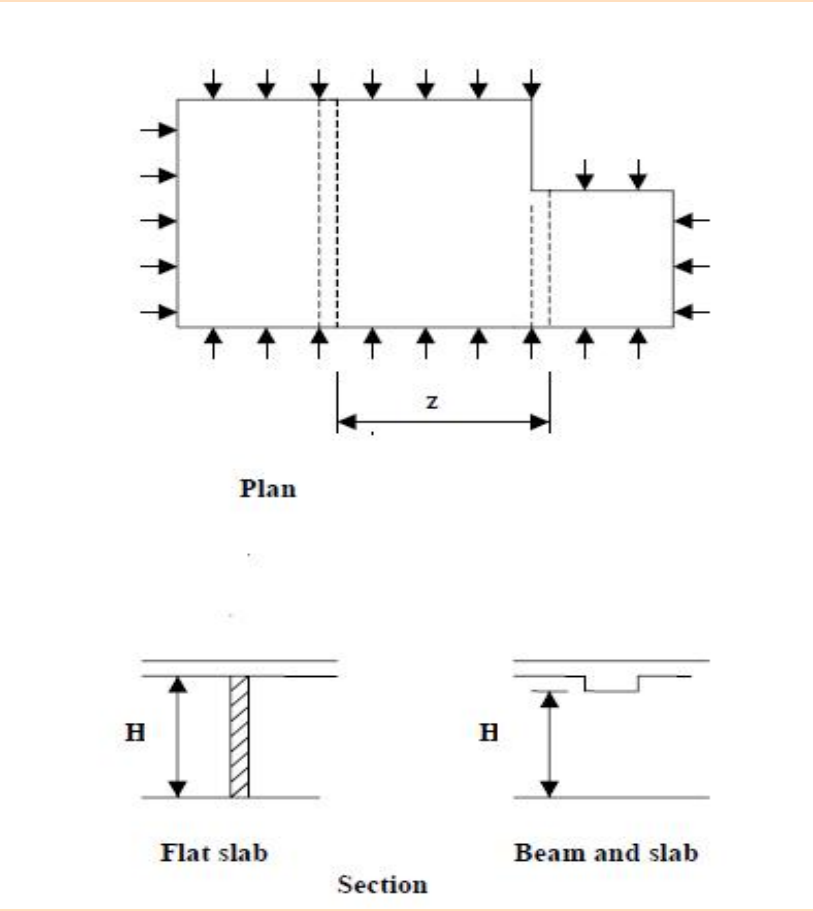


Figure A3 – Definition of factors.

A6 Effective vertical ties

(1) Each column and wall should be tied continuously from the foundations to roof level.

(2) In the case of framed buildings (eg. steel or reinforced concrete structures) the columns and walls carrying vertical actions should be capable of resisting an accidental design tensile force equal to the largest design vertical permanent and variable load reaction

applied to the column from any one storey. Such accidental design loading should not be assumed to act simultaneously with normal loading.

(3)In the case of load-bearing wall construction the vertical ties may be considered effective if:

a) In the case of masonry walls their thickness is at least 150mm thick and if they have a
b) minimum compressive strength of 5N/mm2 in accordance with EN1996-1-1. The clear height of the wall, ha, measured in metres between faces of floors or roof does not exceed 20 t, where t is the thickness of the wall in metres.
c) The vertical tie force T is $\frac{34A}{8000}\left(\frac{H}{t}\right)^2$ N, or 100KN/m of wall, whichever is the greater,

Where:

A = the cross-sectional area in mm^2 of the wall measured on plan, excluding the non-loadbearing leaf of a cavity wall.

d) The vertical ties are grouped at 5m maximum centres along the wall and occur no greater than 2.5m from an unrestrained end of wall.

A7 Nominal section of load-bearing wall

1) The nominal length of load-bearing wall construction referred to in **A5(c)** should be taken as follows:

– in the case of a reinforced concrete wall, a length not exceeding 2.25H

– in the case of an external masonry, or timber or steel stud wall, the length measured between vertical lateral supports.

– in the case of an internal masonry, or timber or steel stud wall, a length not exceeding 2.25H

where:

H is the storey height in metres.

A8 Key Elements

1) A "key element", as referred to in **A4,** should be capable of sustaining an accidental design action of Ad applied in horizontal and vertical directions (in one direction at a time) to the member and any attached components having regard to the ultimate strength of such components and their connections. Such accidental design loading should be assumed to act simultaneously with normal loading. This will require use of the combination of actions rules given in EBCS EN1990, 6.4.3.3.

Note: The National Annex may give a value for A_d. The recommended value for Ad is $34kN/m^2$.

ONLY FOR REVIEW PURPOSE

ANNEX B
(INFORMATIVE)
GUIDANCE FOR RISK ANALYSIS[1]

B1 Introduction

(1) This annex covers the elements that ideally comprise total risk analyses. This annex can be uses as a guideline for the planning, execution and use of risk analyses. A general overview is presented in Figure B1.

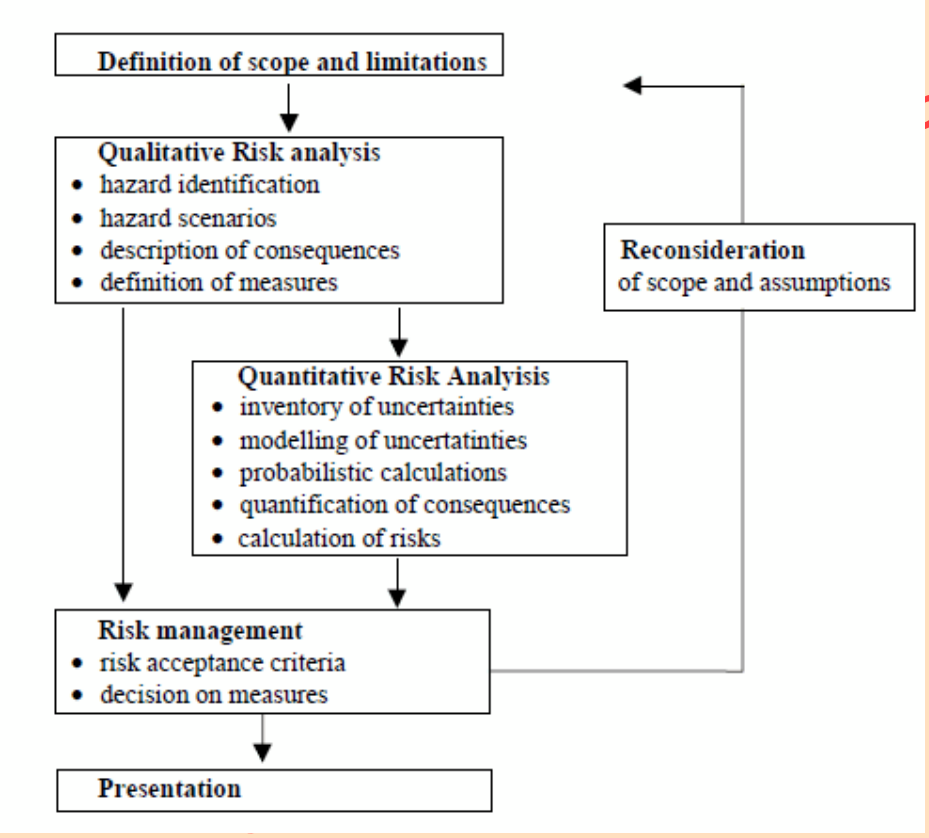


Figure B1: Overview of Risk Analysis

[1] It is the intention to amalgamate the contents of this Annex in future editions of EBCS EN1990, Basis of Design.

B2 Definitions

B2.1
Acceptance criteria:
Criteria based on regulations, standards, experience and/or theoretical knowledge used as a basis for decisions about acceptable risk. Acceptance criteria may be expressed verbally or numerically.

B2.2
Consequence:
A possible result of an undesired event. Consequences may be expressed verbally or numerically to define the extent of injury to humans, or environmental or material damage.

B2.3
Hazard:
A hazard is a set of conditions that may lead to undesirable or adverse events.

B2.4
Risk:
Risk designates the danger that undesired events represent for humans, the environment or material values. Risk is expressed in the probability and consequences of these events.

B2.5
Risk analysis:
A systematic approach for describing and/or calculating risk. Risk analysis involves the identification of undesired events, and the causes, likelyhoods and consequences of these events.

B2.6
Risk evaluation:
A comparison of the results of a risk analysis with the acceptance criteria for risk and other decision criteria.

B2.7
Safety management:
Systematic measures undertaken by an organization in order to attain and maintain a level of safety that complies with defined objectives.

B2.8
Undesired event:
An event or condition that can cause human injury or environmental or material damage.

B3 Description of the scope of a risk analysis

(1) The subject, background and objectives of the risk analysis shall be described. The description should include relevant limitations and shall specify the operating conditions covered by the risk analysis. The description will show which parties are affected by the

ONLY FOR PREVIEW PURPOSE

problems concerned, and in what way. The decisions that are to be made, the criteria for decision and the decision-makers shall be identified.

(2) The undesired events that are considered relevant for inclusion in the analysis should be described and it shall be stated where they occur in the subject for analysis. Criteria for not including undesired events in a causal analysis and/ or consequence analysis shall be given.

(3) All technical, environmental, organizational and human circumstances that are relevant to the activity and the problem being analyzed, shall be stated sufficiently detailed.

(4) All presuppositions, assumptions and simplifications made in connection with the risk analysis should be stated.

Note: It is crucial that the assumptions on which the analysis is based are followed up by, for example, including them as part of the specifications for detailed design and operation.

B4 Procedure and methods

(1) The risk analysis has a descriptive (qualitative) part and may, where relevant and possible, also have a numerical (quantitative) part.


(2) The consequence analysis should consider both immediate consequences and those that arise after a certain time has elapsed. The consequences may be: casualties, injuries, psychological damage, monetary values or environmental values.

(3) In the qualitative risk part of the risk analysis all hazards and corresponding hazard scenarios have to be identified. Identification of hazards and hazard scenarios is a crucial task to a risk analysis. It requires a detailed examination and understanding of the system. For this reason a variety of techniques have been developed to assist the engineer in performing this part of the job (e.g. PHA, HAZOP, fault tree, event tree, decision tree, causal networks, etc).

(4) In the quantitative part of the risk analysis probabilities will be estimated for all undesired events and their subsequent consequences. The probability estimations are usually at least partly based on judgement and may for that reason differ quite substantially from the actual failure frequencies.

(5) If damages can be expresses in numbers, we may present the risk as the mathematical expectation of the consequences of an undesired event. A possible way of presenting risks is indicated in Figure B2.

ONLY FOR REVIEW PURPOSE

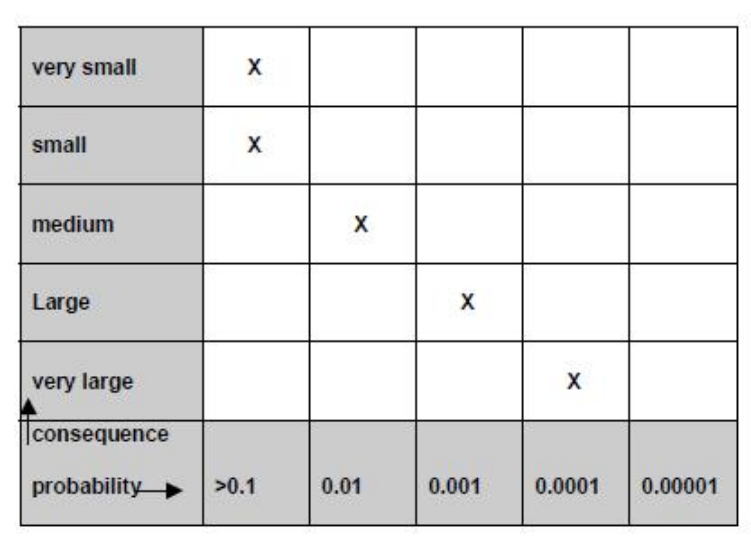

very small	X				
small	X				
medium		X			
Large			X		
very large				X	
consequence ↑ probability →	>0.1	0.01	0.001	0.0001	0.00001

Figure B.2: Possible presentation diagram for the outcome of a quantitative risk analysis

(6) Any uncertainty in calculations/figures due to the data and models used, should be discussed. This includes evaluating:

- the relevance of the data used
- the possibility of drawing correct conclusions on the basis of the data used
- all presuppositions made in connection with the data used
- all adjustments of the data used
- all subjective estimates
- all simplifications and assumptions in models
- all approximations in the calculations.

If possible the uncertainty should be quantified.

(7) The Risk analysis will be terminated at a level that is appropriate considering, for example:

- the objective of the risk analysis and the decisions to be made
- the limitations made at an earlier stage in the analysis
- the availability of relevant or accurate data
- the consequences of the undesired events (some events can be omitted from the analysis because their consequences are insignificant). These stopping rules will be stated.

(8) The assumptions upon which the analysis is based should be reconsidered when the results of the analysis are available. Sensitivities should be quantified.

B5 Risk acceptance and mitigating measures

(1) Given a risk it has to be decided whether it will be accepted or whether mitigating (structural or nonstructural) measures will be specified.

ONLY FOR REVIEW PURPOS

(2) In risk acceptance usually the ALARA (as low as reasonably achievable) principle is being used. According to this principle two risk levels are specified: if the risk is below the lower bound no measures need to be taken; if it is above the upper bound the risk is considered as unacceptable. If the risk is between the upper and lower bound an economical optimal solution is being sought for.

(3) Risk acceptance levels are usually formulated on the basis of the following two criteria:

- The Individual acceptable level of risk: Individual risks are usually expressed as Fatal Accident Rates. They can be expressed as an annual fatality probability or as the probability per time unit of a person being killed when actually being involved in a specific activity.
- The socially acceptable level of risk: The social acceptance of risk to human life, which may vary with time, is often presented as an F-N-curve, indicating a maximum yearly probability of having an accident with more than N casualties.

Alternatively, concepts like Value for Fatality Prevented or Quality of life index, may be used.

Criteria specifications can be found in national regulations, standards, experience and/or theoretical knowledge used as a basis for decisions about acceptable risk. Acceptance criteria may be expressed verbally or numerically. More information can be specified in the National Annex.

B6 Presentation of results and conclusions

(1) The results of the qualitative ad (if available) the quantitative analysis shell be presented as a list of consequences and probabilities and their degree of acceptance should be discussed.

(2) All data sources and data that have been used to carry out a risk analysis should be specified.

(3) All the essential assumptions, presuppositions and simplifications that have been made should be summarized so that the validity and limitations of the risk analysis are made clear.

(4) Recommendations for measures to mitigate risk that naturally arise from the risk analysis should be stated.

B7 Applications to buildings and civil engineering structures

B7.1 General

(1) In order to mitigate the risk in relation with accidental or other extreme events in buildings and civil engineering structures one or more of the following measures may be taken:

- Structural measures, that is by designing strong structural elements or by designing for second load paths in case of local failures.

ONLY FOR REVIEW PURPOSE

– Nonstructural measures, that is by a reduction of the event probability, the action intensity or the consequences.

(2) Theoretically, the probabilities and effects of all accidental and extreme actions (fire, earth quake, impact, explosion, extreme climatic actions) should be simulated for all possible action scenarios. Next the consequences should be estimated in terms of number of casualties and economic losses. Various measures can be compared on the basis of economic criteria. This in fact is a standard risk analysis as described in B.2 – B6. Very often nonstructural measures (like sprinklers in the case of fire) will prove to be very efficient.

(3) The approach mentioned under (2) does not work for unforseeable hazards (design or construction errors, unexpected deterioration, etc). As a result more global damage tolerance design strategies (see Annex A) have been developed, like the classical requirements on sufficient ductility and tying of elements. One very specific approach, in this respect, is that one considers the situation that a structural element (beam, column) has been damaged, by whatever event, to such an extent that its normal load bearing capacity has vanished almost completely. For the remaining part of the structure it is then required that for some relatively short period of time (repair period T) the structure can withstand the "normal" loads with some prescribed reliability:

$$P(R < S \text{ in } T \mid \text{one element removed}) < p_{target}$$

The target reliability depends on the normal safety target for the building, the period under consideration (hours, days or months) and the probability that the element under consideration is removed (by other causes then already considered in design).

(4) For conventional structures it should, at least in theory, be possible to include all relevant collapse origins in the design. Of course, it will always be possible to think of failure causes not covered by the design, but those will have a remote likelihood and may be disregarded on the basis of decision theoretical arguments. For those structures the approach in clause (2) may work. In many cases, in order to avoid complicated analyses, one may also choose for the strategy mentioned in (3).

(5) For unconventional structures (very large structures, new design concepts, new materials) the probability of having some unspecified failure cause should be considered as substantial. In those cases a combined approach of the methods described under (2) and (3) is recommended.

ONLY FOR REVIEW PURPOSE

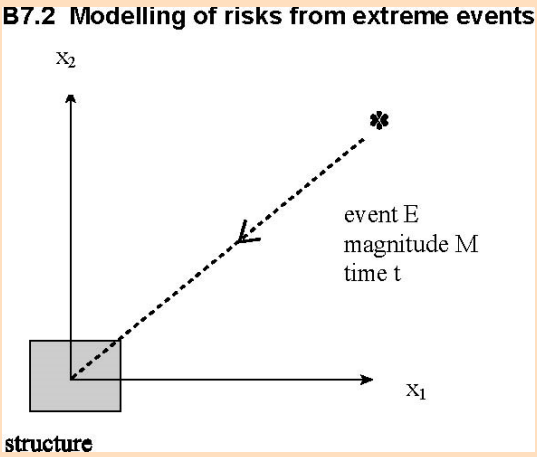


Figure B3: Ingredients for the extreme event modelling

ONLY FOR REVIEW PURPOSE

B7.2.1 General Format

As part of a Risk Analysis one may have to use extreme loading events like earth quakes, explosions, collisions etc. The general model for such an event may be constituted out of the following ingredients (figure B3):

- A triggering event E at some place and at some point in time; the triggering event may be an earth quake, a fire ignition, an explosion, a mechanical failure aboard a vehicle or ship, etcetera.
- The magnitude M of the energy involved in the event and possibly some other parameters.
- The physical interactions between the event, the environment and the structure, leading to the exceedance of some limit state in the structure.

The occurrence of the triggering event E may often be modelled as events in a Poisson process of intensity $\lambda(t,x)$ per unit volume and time unit, t representing the point in time and x the location in space (x_1, x_2, x_3). The probability of occurrence of failure during the time period up to time T is then (for small probabilities) given by

$$P_f(T) \approx \int_{R^3} \left[\int_0^T \lambda(t,x)dt \int_0^\infty (Z<0|m,x) f_M(m;x)dm \right] dx \qquad \text{(B1)}$$

where $f_M(m;x)$ is the probability density function of the random magnitude *M* of the event *E* occurring at the place x, the symbol *Z* represents the limit state function for the failure mechanism under consideration such that $Z > 0$ is the event of no failure.

Given the exceedance of a limit state, the consequences C of such an event should be evaluated. The product of consequences and failure probability is the expected loss or risk. The integrated risk for a period of time *T*, taking into account the discount rate r based on the asymptotic formula (B1) is given by:

$$R(T) \approx \int_{R^3} \left[\int_0^T C(t) e^{-rt} \lambda(t,x)dt \int_0^\infty (Z<0|m,x) f_M(m;x)dm \right] dx \qquad \text{(B2)}$$

For T → ∞ and if the intensity λ(t,x) and the failure consequence function *C(t)* are independent of *t,* this risk approaches

$$R \approx \frac{1}{r} \int_{R^3} C\lambda(x)\left[\int_0^{\infty} P(Z<0|m,x)\, f_M\,(m;x)dm\right]dx \qquad \text{(B3)}$$

B7.2.2 Application to impact from vehicles

For this application equation (B1) is further developed for the case of impact loading by vehicles on highways.

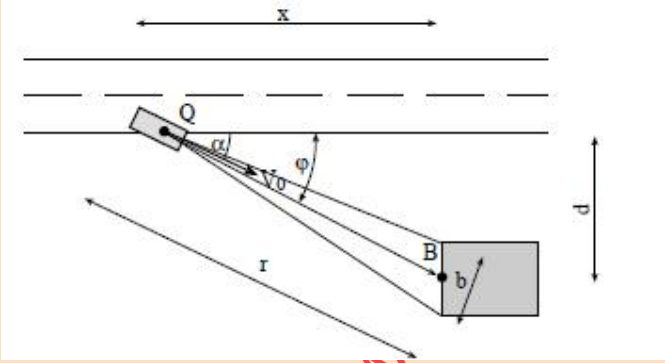


Figure B4: A vehicle leaves this intended course at point Q with velocity v_0 and angle α. A structural element at distance r is hit with velocity v_r.

Consider a structural element in the vicinity of a road or track. Impact will occur if some vehicle, travelling over the track, leaves its intended course at some critical place with sufficient speed (figure B4). Which speed is sufficient depends on the distance from the structural element to the road, the angle of the collision course, the initial velocity and the topographical properties of the terrain between road and structure. In some cases there may be obstacles or even differences in height.

Modifying the general equation (B1) we may write the failure probability for this case as:

$$P_f\,(T) \approx \int_{-\infty}^{\infty}\left[\int_0^T \lambda(t,x)dt\,\left(\int_0^{\infty}\int_0^{\infty} P\,(Z<0|y,x)f_y\,(y|x)\,dy\right)\right]dx \qquad \text{(B4)}$$

where M in (2) is replaced by the vector Y of random load variables like mass, stiffness, and velocity of the vehicle, and x in (2) is replaced by the scalar length coordinate x along the road. The intensity *λ(t,x)* may be written as the product of the traffic intensity *n(t)* (assumed to be independent of x) at time t and the vehicle failure intensity $\lambda_v(t,x)$. Assuming constant n and λ_v to be constant the failure probability becomes

$$P_f\,(T) \approx nT\lambda_v \int_{-\infty}^{\infty} P(Z<0|x)dx \qquad \text{(B5)}$$

In order to have failure due to an incident at point x, the impact force has to be larger then the resistance R and the leaving direction α of the truck needs to be correct (see Figure B4):

$$P_f = nT\lambda_v \int_{-\infty}^{\infty} P(\{F_c > R\} \cap \{|\alpha-\varphi| < a\tan(b/2r)\})\,dx \qquad \text{(B6)}$$

ONLY FOR REVIEW

Using a simple impact model (see Annex C) the impact force F_c can be written as:

$$F_c = \sqrt{mkV_r^2} = \sqrt{mk(V_o^2 - 2ar)} \quad \text{(B7)}$$

where m represents the vehicle mass, k the stiffness and v_o the velocity of the vehicle when leaving the track at point Q and a the constant deceleration of the vehicle after it has left the road (see figure 2) and $r = \sqrt{(x^2+d^2)}$ the distance from point Q to the structure.

ONLY FOR REVIEW PURPOSE

B7.2.3 Application to impact from ships

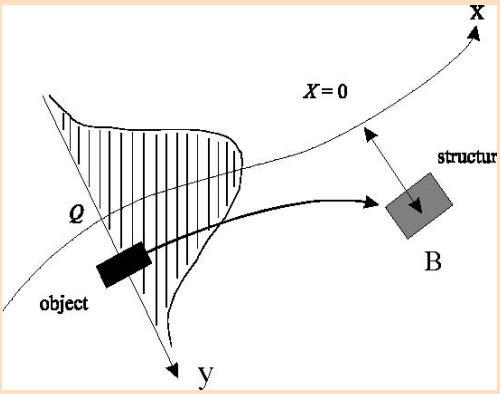


Figure B5: Ship collision scenario

For this application equation (B1) is further developed as follows (adopting the simple model for the impact force according to Annex C):

$$P(F) = nT(1-p_a)\iint \lambda(x)P[V_r(x,y)\sqrt{(km)} > R]f_s(y)dxdy \qquad \text{(B8)}$$

where:

$v_r(x,y)$ is the impact velocity of the ship, given error or mechanical failure at point (x,y);

k is the equivalent stiffness of the ship;

m is the mass of the ship;

n is the number of ships per time unit (traffic intensity);

T is the reference period (1 year);

p_a is the probability that a collision is avoided by human intervention;

λ is the probability of a failure per unit travelling distance;

$f_s(y)$ is the distribution of initial ship position in y direction (see figure B5).

ONLY FOR REVIEW PURPOSE

B7.2.4 Application to impact from rail traffic

Note: Further recommendations and guidance for class A and class B structures are set out in UIC Code 777-2R (2002) “Structures Built Over Railway Lines (Construction requirements in the track zone). UIC Code 777-2R includes specific recommendations and guidance on the following:

- carrying out a risk assessment for class B structures,
- measures (including construction details) to be considered for class A structures, including situations where the maximum line speed at the site is less than 50km/h,
- measures to be considered for class A structures where the distance from the nearest structural support and the centre line of the nearest track is 3m or less.

(1) The following factors should be taken into account when assessing the risk of harm to people from derailed trains on the approach to a class 3A structures where the maximum permitted line speed at the site is over 120 km/h and class 3B structures:

- The predicted rate of derailed trains on the approach to the structure.
- The permissible speed of trains using the line.
- The predicted deceleration of derailed trains on the approach to the structure.
- The lateral distance a derailed train is predicted to travel.
- Whether the line is single or not in the vicinity of the structure.
- The type of traffic (passenger / freight) passing under the structure.
- The predicted number of passengers in the train passing under the structure.
- The frequency of trains passing under the structure.
- The presence of switches and crossings on the approach to the structure.
- The static system (structural configuration) of the structure and the robustness of the supports.
- The location of the supports to the structure relative to the tracks.
- The predicted number of people, not in the train, who are at risk from harm from a derailed train.

The following factors also affect the risk from derailed trains, but to a lesser extent:

- The curvature of the track in the vicinity of the structure.
- The number of tracks, where there are more than two.

The effect that any preventative and protective measures proposed have on other parts or other users of the adjacent infrastructure should also be taken into account. This includes for example the effect on signal sighting distances, authorised access, and other safety considerations relating to the layout of the track.

(2) The following should be considered for Class B structures either singly or in combination in determining the appropriate measures to reduce the risk of harm to people from a derailed train on the approach to a structure:

ONLY FOR REVIEW PURPOSE

- Provision of robustness to the supports of the structure to withstand the glancing impact from a derailed train to reduce the likelihood of collapse of the structure.

- Provision of continuity to the spans of the superstructure to reduce the likelihood of collapse following impact with the supports of the structure from a derailed train.

- Provision of measures to limit the lateral deviation of the derailed train on the approach to the structure to reduce the likelihood of impact from a derailed train.

- Provision of increased lateral clearance to the supports of the structure to reduce likelihood of impact from a derailed train.

- Avoidance of supports located in a line that is crossed by a line extended in the direction of the turnout of a switch to reduce the likelihood of a derailed train being directed towards the supports of the structure.

- Provision of continuous walls or wall type supports (in effect the avoidance of supports consisting of separate columns) to reduce the likelihood of collapse following impact with the supports of the structure from a derailed train.

- Where it is not reasonably practicable to avoid supports consisting of separate columns provision of supports with sufficient continuity so that the superstructure remains standing if one of the columns is removed.

- Provision of deflecting devices and absorbing devices to reduce the likelihood of impact from a derailed train.

ONLY FOR REVIEW PURPOSE

ANNEX C
(INFORMATIVE)
ADVANCED IMPACT DESIGN

C.1 General

(1) Impact is an interaction phenomenon between a moving object and a structure, in which the kinetic energy of the object is suddenly transformed into energy of deformation. To find the interaction forces, the mechanical properties of both object and structure should be considered. Usual formulae provide equivalent static forces to be used in design.

(2) Advanced design for actions due to impact may include explicitly one or several of the following aspects:

- dynamic effects;
- non-linear material behaviour;

Note: Probabilistic aspects and analysis of consequences are dealt with in Annex B.

(3) This Annex provides guidance for design of structures subject to accidental impact by road vehicles, rail vehicles and ships.

Note: Analogous actions can be the consequence of impact in tunnels, on road barriers, etc. (cf EN1317). Similar phenomena may also arise as consequences of explosions (see Annex D) and other dynamic actions.

C.2 Impact dynamics

(1) For the purpose of this Code, impact can be characterised as either hard impact, when the energy is mainly dissipated by the impacting body, or soft impact, when the structure is designed to deform in order to absorb the impact energy.

C.2.1 Hard Impact

(1) In case of hard impact, the dynamic or equivalent static forces may conservatively be taken from clauses 4.3 to 4.7. Alternatively, a full dynamic analysis can be performed, introducing appropriate simplifying approximations, like those suggested in this Annex.

(2) If it is assumed that the structure is rigid and immovable and the colliding object deforms linearly during the impact phase. While rigid at unloading, the maximum resulting interaction force and the duration of the loading are given by:

$$F = v_r \sqrt{k\, m} \qquad \text{(C2.1)}$$

$$\Delta t = \sqrt{m/k} \qquad \text{(C2.2)}$$

ONLY FOR REVIEW PURPOSE

where:

- v_r is the object velocity at impact;
- k is the equivalent elastic stiffness of the object (i.e. the ratio between force F and total deformation);
- m is the mass of the colliding object.

If the colliding object is modelled as a equivalent rod of uniform cross-section (see Fig. C.1)

$$k = EA/L \quad \text{(C2.3)}$$

$$m = \rho AL \quad \text{(C2.4)}$$

where

- L is the length of the rod;
- A is the cross sectional area;
- E is the modulus of elasticity;
- ρ is the mass density of the rod.

The shape of the force due to impact can usually be assumed as a rectangular pulse of duration √(m/k); if relevant a non-zero rise time can be applied (see Figure C.1).

(3) Expression (C.1) gives the maximum force value on the outer surface of the structure. Inside the structure these forces may give rise to dynamic effects. An upper bound for these effects can be found if the structure is assumed to respond elastically and the load is conceived as a step function (i.e. a function that raises immediately to its final value and than stays constant at that value). In that case the dynamic amplification factor (i.e. the ratio between dynamic and static response) φdyn is 2.0. If the pulse nature of the load (i.e. its limited time of application) is taken into account, calculations will lead to amplification factors φdyn ranging from below 1.0 up to 1.8 depending on the dynamic characteristics of the structure and the object. In general, it is recommended to use a direct dynamic analysis to determine φdyn with the loads specified in this Annex.

ONLY FOR REVIEW PURPOSE

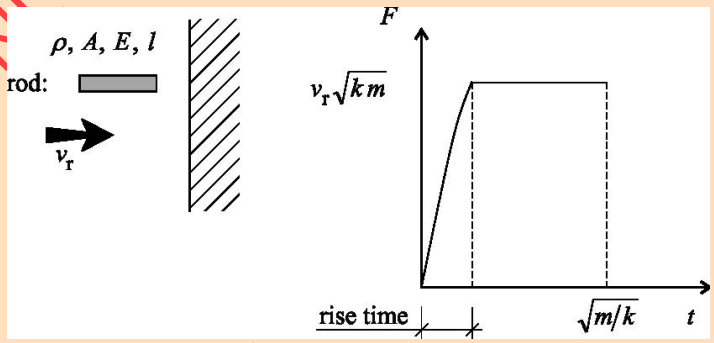


Figure C.1: Impact model

C.2.2 Soft Impact

(1) If the structure is assumed elastic and the colliding object rigid, the formulae of Sec.C.2.1 still apply, with k being the stiffness of the structure.

(2) If the structure is designed to absorb the impact energy by plastic deformations, it must be insured that its ductility is sufficient to absorb the total kinetic energy ½ m v_r^2 of the colliding object.

(3) In the limit case of rigid-plastic response of the structure, the above requirement is satisfied if

$$1/2 m V_r^2 \leq F_0 y_o \qquad \text{(C2.5)}$$

where

F_o is the plastic strength of the structure, i.e. the quasi-static limit value of the force F

y_o is its deformation capacity, i.e. the displacement of the point of impact that the structure can undergo.

Note: Analogous considerations apply to structures or other barriers specifically designed to protect a structure from impacts (see e.g. EN1317 "Road restraint systems").

C.3 Impact from aberrant road vehicles

(1) In case of a lorry impacting a structural element, the velocity of impact to be inserted in Eq.(C.1) can be taken equal to

$$v_r = \sqrt{(v_o^2 - 2as)} \qquad \text{(C3.1)}$$

where:

v_0 is the velocity of the lorry leaving its track on the traffic lane,
a is the average deceleration of the lorry after leaving the traffic lane;
s is the distance from the point where the lorry leaves the traffic lane to the structural element, see Figure 4.3.1)

(2) Notional probabilistic information for the basic variables partly based on statistical data and partly on engineering judgement is given in Table C.1.

Note: see also Annex B.

(3) Alternatively, the following design value for the force due to impact can be determined:

$$F_d = F_o \sqrt{1 - 2/s_{br}} \qquad \text{(C3.2)}$$

where:

F_0 is the collision force
s_{br} is the braking distance.

ONLY FOR REVIEW PURPOSE

Values are presented in Table C.2. This table also presents design values for m and *v*. These values correspond approximately to the averages given in Table C.1 plus or minus one standard deviation.

A deviation from the traffic direction of 30 degrees may be adopted for the lorry after braking.

(4) In the absence of a dynamic analysis, the dynamic amplification for the elastic response may be put equal to 1.4.

ONLY FOR REVIEW PURPOSE

Table C.1: Notional data for probabilistic collision force calculation

Variable	Designation	Probability distribution	Mean value	Standard deviation
V	vehicle velocity			
	- highway	Lognormal	80 km/h	10 km/h
	- urban area	Lognormal	40 km/h	8 km/h
	- courtyard	Lognormal	15 km/h	5 km/h
	- parking house	Lognormal	5 km/h	5 km/h
A	Deceleration	Lognormal	4.0 m/s^2	1.3 m/s^2
M	Vehicle mass – lorry	Normal	20 ton	12 ton
M	Vehicle mass – car	---	1 500 kg	-
K	Vehicle stiffness	Deterministic	300 kN/m	-

ONLY FOR REVIEW PURPOSE

Table C.2: Design values for mass, velocity and collision force F_0

Type or road	Mass m [kg]	Velocity v [km/h]	Deceleration a [m/s^2]	Collision force based on (C.1) F_0 [kN]	Barking distance s_{br} [m]
Motorway	30 000	90	3	2 400	90
Urban area	30 000	50	3	1 300	40
Courtyards					
– cars only	1 500	20	3	120	5
– all vehicles	30 000	15	3	400	5
Parking garages					
– cars only	1 500	10	3	90	4

ONLY FOR REVIEW PURPOSE

C.4 Impact by ships

(1) Impact by ships should always be considered as hard impact, with the kinetic energy being dissipated by elastic or plastic deformation of the ship itself.

(2) Instead of using the values given in Tables 4.6.1 and 4.6.2 of the main text, the impact force F_d may be derived directly from expression (C.1). In this case, it is recommended to use the average mass value for the relevant ship class defined in said Tables, a design velocity v_{rd} equal to 3 m/s increased by the water velocity, and k = *15 MN/m* for sea going vessels or k = 5 MN/m for inland ships. In harbours the velocity may be assumed as 1.5 m/s and at full sea 5 m/s is recommended.

(3) Alternatively, the design impact force may be calculated from:

$$F_{\text{dyn}} = 5.0\sqrt{1 + 0.128 \cdot E_{def}}\,[MN] \qquad \text{(C5.1)}$$

where the deformation energy E_{def} [MNm] is given by the available total kinetic energy E_a for frontal impact; the deformation energy for lateral impact can be taken from

$$E_{\text{def}} = E_{fa}(1 - \cos\alpha) \qquad \text{(C5.2)}$$

For frontal impact the mass m* to be taken into account is the total mass of the colliding ship/barge; for lateral impact: $m^* = (m_1 + m_{hydr})/3$, where m_1 is the mass of the directly colliding ship or barge and m_{hyd} is the hydraulic added mass. A design velocity v_{rd} equal to 3 m/s increased by the water velocity is recommended; in harbours the velocity may be assumed as 1.5 m/s. The angle α may be taken as 20^0.

(4) Alternatively, the dynamic design impact force for merchant vessels between 500 DWT and 300.000 DWT may be calculated from:

$$F_{bow} = F_{bow} = \begin{cases} F_o \cdot \bar{L}\left[\bar{E}_{imp} + (0.5 - \bar{L})\bar{L}^{1.6}\right]^{0.5} & for \bar{E}_{imp} \geq \bar{L}^{2.6} \\ 2.24 \cdot F_o\left[\bar{E}_{imp}\bar{L}\right]^{0.5} & for \bar{E}_{imp} \leq \bar{L}^{2.6} \end{cases} \quad (C5.3)$$

where:

$\bar{L} = L_{pp} / 275m$

$\bar{E} = E_{imp} / 1425MNm$

$$E_{imp} = \frac{1}{2} m_x V_o^2$$

and

F_{bow} maximum bow collision force in [MN];
F_o reference collision force = 210 MN;
E_{imp} energy to be absorbed by plastic deformations;
L_{pp} length of vessel in [m];
m_x mass plus added mass (5 %) with respect to longitudinal motion in [10^6 kg];
v_o initial speed of vessel = 5 m/s (in harbours: 2,5 m/s)

From the energy balance the maximum indentation s_{max} is found as

$$S_{max} = \frac{\pi E_{imp}}{2P_{bow}} \quad (C5.4)$$

and the associated impact duration is represented by a sinusoidal curve with

$$T_o \approx 1.67 \frac{ES_{max}}{V_o} \quad (C5.5)$$

(5) The load duration may be derived from expression (C.2). For cases where the rise time is relevant this may be assumed as u_e/v_{rd}, where u_e is the maximum elastic deformation, for which a value of 0.1 m may be taken if no more accurate information is available.

(6) In the absence of a structural dynamic analysis a dynamic amplification factor shall be used: the recommended values are 1.3 for frontal impact and 1.7 for lateral impact.

(7) If a dynamic structural analysis is used, one should model the impact forces as a half-sinewave pulse for F_{dyn}< 5 MN and a trapezoidal pulse for F_{dyn} > 5 MN; load durations and other details are presented in Figure C.3.

ONLY FOR REVIEW PURPOSE

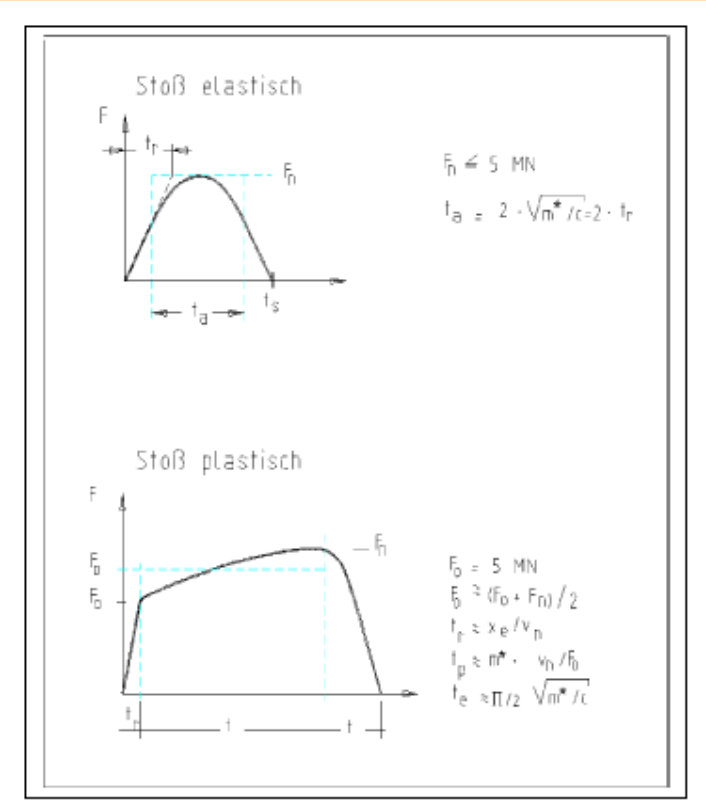


Figure C.3: Load-time function for ship collision, respectively for elastic and plastic ship response

with
t_r = elastic elapsing time [s];
t_p = plastic impact time [s];
t_e = elastic response time [s];
t_a = equivalent impact time [s];
t_s = total impact time [s];
c = elastic stiffness of the ship = 60 MN/m;
F_0 = elastic-plastic limit force = 5 MN;
x_e = elastic deformation ≈ 0.1 m;
v_n = velocity of the colliding ship normal to the impact point :
– for frontal impact; v_n = the sailing speed v
– for lateral impact, v_n = v sin α

ONLY FOR REVIEW

ANNEX D
(INFORMATIVE)
INTERNAL EXPLOSIONS

D1 Dust explosions in rooms and silos

see also background document, following text from ENV 1991-2-7

(1) The type of dust under normal circumstances may be considered by a material parameter K_{st}, which characterises the confined explosion behaviour. K_{st} may be experimentally determined by standard methods for each type of dust. A higher value for K_{st} leads to higher pressures and shorter rise times for internal explosion pressures. The value of K_{st} depends on factors such as changes in the chemical compositions, particle size and moisture content. The values for K_{st} given in Table B.1 are examples.

Note: See ISO 1684-a Explosion Protection systems - Part 1: Determination of explosion indices of combustible dusts in air.

(2) The venting area and the design pressure for dust explosions within a single silo may be found from the following set of expressions:

$$Av = 4.5 \times 10^{-5} \times K_{st} \times K_{h/d} \times V^{0.77} / Pd^{0.57} \qquad \text{(D.1)}$$

$$K_{h/d} = \begin{cases} 1 + \left(\frac{h}{d}\right)(4 - 0.8\ln(p_d)) & for\ 20kN/m^2 \le P_d \le 150kN/m^2 \\ 1 & for\ 150kN/m^2 \le P_d \le 200kN/m^2 \end{cases} \qquad \text{(D.2)}$$

where:

In (..) is the natural logarithm of (..);
A*v* is the venting area, in square metres;
K_{St} see Table B.1 (kN/m^2 x m/s
V is the volume, in cubic metres;
p_d is the design pressure, in kilonewton per square metres;
h is the height of the silo cell, in metres;
d is the diameter or equivalent diameter of silo cell, in metres.

Expressions (D.1) and (D.2) can be solved directly to determine the venting area, but only iteratively to determine the design pressure.

Expressions (D.1) and (D.2) are valid for:

- $h/d \le 12$;
- static activation pressure of rupture disk $p_a \le 0.10$ kN/m^2
- rupture disks and panels with a low mass which respond almost with no inertia.

(3) In dust explosions, pressures reach their maximum value within a time span in the order of 100 10^{-6} s. Their decline to normal values strongly depends on the venting device and the geometry of the enclosure.

ONLY FOR REVIEW PURPOSE

Table D.1: K_{st} values for dusts

Type of dust	K_{st} ($kN/m^2 x\ m/s$)
brown coal	18 000
cellulose	27 000
coffee	9 000
corn, corn crush	12 000
corn starch	21 000
grain	13 000
milk powder	16 000
mineral coal	13 000
mixed provender	4 000
paper	6 000
pea flour	14 000
pigment	29 000
rubber	14 000
rye flour, wheat flour	10 000
soya meal	12 000
sugar	15 000
washing powder	27 000
wood, wood flour	22 000

ONLY FOR REVIEW PURPOSE

D2 Dust explosions in energy ducts

see background document

D3 Gas and vapour/air explosions in rooms, closed sewage bassins

see background document

D4 Natural gas explosions

(1) For buildings provided for having natural gas installed, the structure may be designed to withstand the effects of an internal natural gas explosion using a nominal equivalent static pressure given by expressions (D.4) and (D.5):

$$p_d = 3 + p_{stat} \quad (D.4)$$

or

$$p_d = 3 + p_{stat} / 2 + 0.04 / (Av / V)^2 \quad (D.5)$$

whichever is the greater,

where:

p_{stat} is the uniformly distributed static pressure at which venting components will fail, in (kN/m²);

Av is the area of venting components, in m^2;

V is the volume of rectangular enclosure [m^3].

Expressions (D.4) and (D.5) are valid for a room up to 1 000 m³ total volume.

NOTE The pressure due to deflagration acts effectively simultaneously on all of the bounding surfaces of the room.

(2) Where building components with different p_{stat} values contribute to the venting area, the largest value of p_{stat} should be used. No value of p_d greater than 50 kN/m^2 need be taken into account.

(3) The ratio of the area of venting components and the volume should comply with expression (D.6):

$$0.05\ (1/m) \le A_v/V \le 0.15 \qquad (D.6)$$

D5 Gas and vapour/air explosions in energy ducts

see background document

D6 Explosions in road and rail tunnels

(1) In case of detonation, the following pressure time function should be taken into account, see Figure D.1(a):

$$p(x,t) = p_o \exp\left\{-\left(t - \frac{|x|}{c_1}\right)/t_o\right\} \text{ for } \frac{|x|}{c_1} \le t \le \frac{|x|}{c_2} - \frac{|x|}{c_1} \qquad (D.3)$$

$$p(x,t) = p_o \exp\left\{-\left(\frac{|x|}{c_1} - 2\frac{|x|}{c_2}\right)/t_o\right\} \text{ for } \frac{|x|}{c_2} - \frac{|x|}{c_1} \le t \le \frac{|x|}{c_2} \qquad (D.4)$$

$p(x,t)=0$ for all other conditions (D.5)

where:

p_o is the peak pressure (=2 000 kN/m^2)
C_1 is the progagaion velocity of the shock wave (~1 800 m/s);
C_2 is the acoustic propagation velocity in hot grasses (~ 800 m/s);
t_o is the time constant (= 0.01 s);
is the height of the silo cell, in metres;
d is the diameter or equivalent diameter of silo cell, in metres.
|x| is the distance to the heart of the explosion;
t is the time.

(2) In case of deflagration the following pressure time characteristic should be taken

ONLY FOR REVIEW PURPOSE

into account, see Figure D.1 (b):

$$p(t) = 4p_o(t / t_o)(1 - t / t_o) \qquad \text{for } 0 \le t \le t_0 \qquad \text{(D.4)}$$

where:

p_o is the peak pressure (=2 000 kN/m^2)

t_o is the time constant (= 0.01s);

t is the time.

This pressure holds for the entire interior surface of the tunnel.

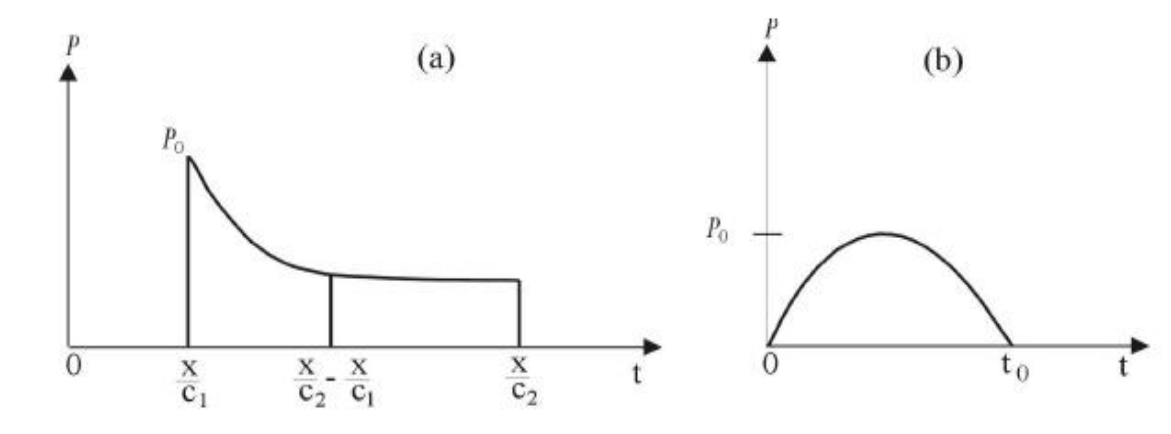


Figure 1: Pressure as a function of time for (a) and (b) deflagration

ONLY FOR RE