CHAPTER-5

CENTROID AND MOMENT OF INERTIA

5.1 Applications of Integrations

5.1.1 Evaluation of Area

Case-I: Simple case.


Suppose the region R under the graph of a continuous function f above the x-axis bounded by the vertical lines $x=a$ and $x=b$ as shown in diagram-I.

Area Formula: The area of the region R is given by $A=\int_a^b f(x)dx$.


Case-II: General case.

Suppose R is bounded between the graphs of continuous functions f and g on $[a,b]$ and $g(x)\le f(x)$, $\forall x\in[a,b]$ as shown in diagram-II.

Then the area of the region is given by $A=\int_a^b[f(x)-g(x)]dx$.

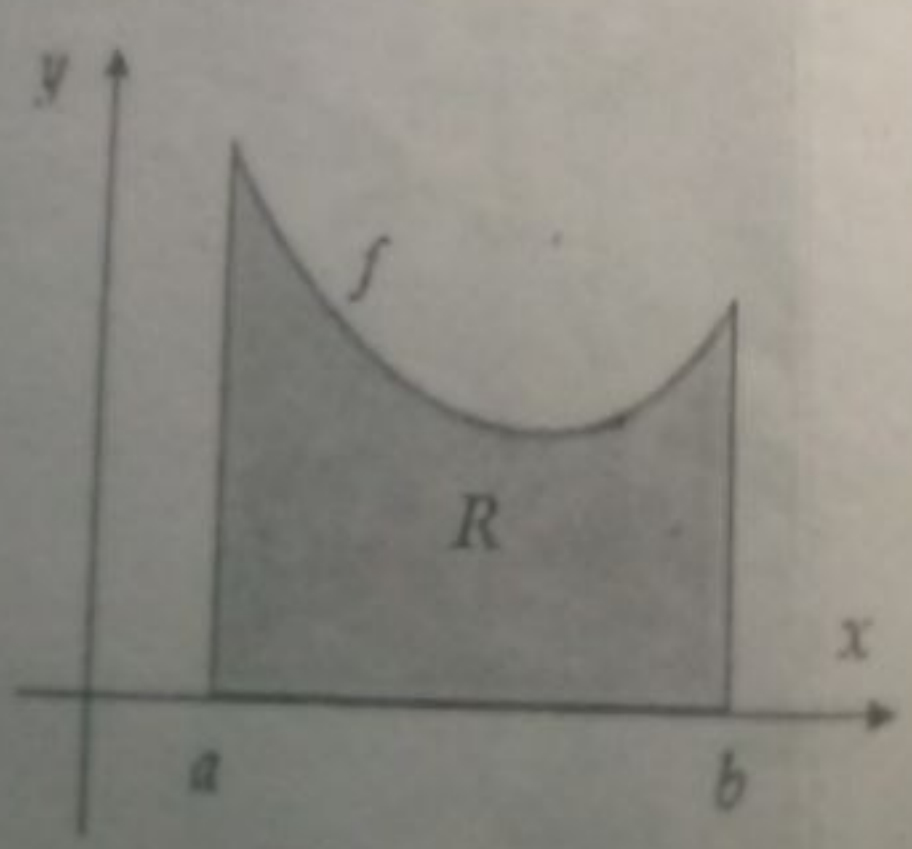

I) Simple case

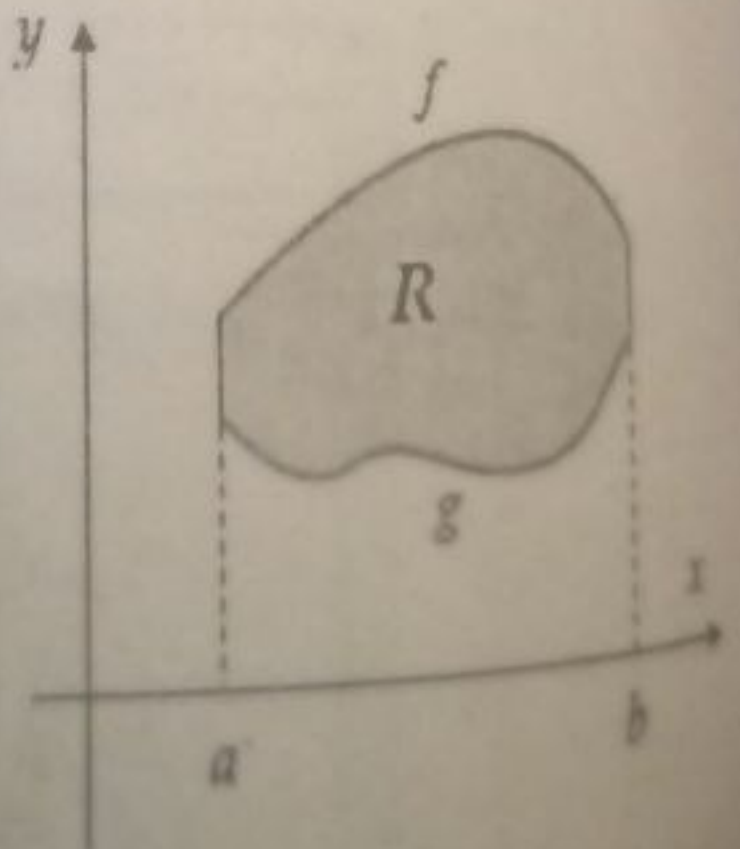

II) General case

Procedures to find Area Bounded by two functions f and g :

First: Identify the interval $[a,b]$. To find the interval, find intersection from $f(x)=g(x)$. This gives the interval $a \le x \le b$.

Second: Identify the upper and the lower function from f and g.

That is whether $g(x) \le f(x)$ or $f(x) \le g(x)$ on $a \le x \le b$. To identify the upper and lower functions, draw the region bounded by f and g. But drawing the region may take time and even students may not understand the graphs of the functions. So, the simplest is to use **TEST POINT**.

TEST POINT: Select one number $x=c$ from the interval $a \le x \le b$.

Then, if $g(c) < f(c)$, use $g(x) \le f(x)$ and if $f(c) < g(c)$, use $f(x) \le g(x)$

Examples:

1. Find the area of the region

a) Under the graph of $f(x) = x + 2$ above the x-axis on $[0,4]$

b) Bounded by $f(x) = 6x$ and $g(x) = 3x^2$

c) Bounded by $f(x) = 3 - x^2$ and $g(x) = 2x$


d) Bounded by $f(x) = x - 1$ and $g(x) = x^2 - 3$

e) Bounded by $x = \frac{y^2}{2}$ and $y = \frac{x^3}{4}$

f) Bounded by $f(x) = x^2 + 3$ and $g(x) = 5 - x^2$

Solution: Draw the region fo simplicity.


a) Refer the required regions in the diagram below:

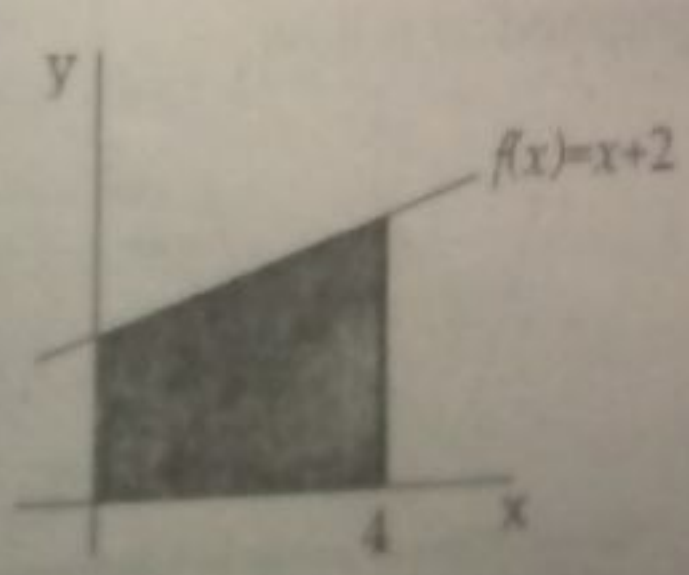

The area is given by $A = \int_a^b f(x)dx = \int_0^4 (x+2)dx = (\frac{x^2}{2} + 2x)\Big|_0^4 = 16$

TECNO SPARK

b) First, find the intersection of the two curves and draw the region.

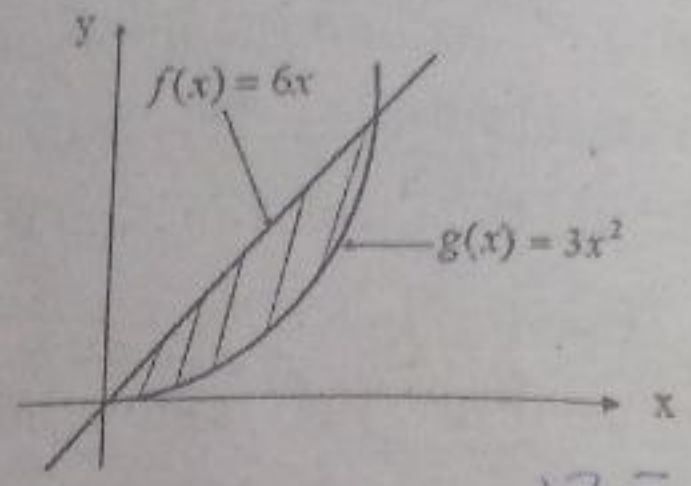


That is $f(x)=g(x)\Rightarrow 6x=3x^2\Rightarrow 3x^2-6x=0\Rightarrow 3x(x-2)=0\Rightarrow x=0,2$

Hence, the area is $A=\int_a^b[f(x)-g(x)]dx=\int_0^2(6x-3x^2)dx=(3x^2-x^3)\Big|_0^2=4$

c) First, find the intersection of the two curves as follow:

$f(x)=g(x)\Rightarrow 3-x^2=2x\Rightarrow x^2+2x-3=0\Rightarrow (x+3)(x-1)=0\Rightarrow x=-3,1$

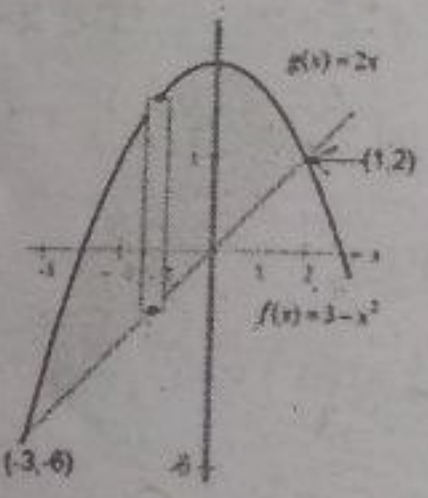


So, $A=\int_a^b[f(x)-g(x)]dx=\int_{-3}^1(3-2x-x^2)dx=(3x-x^2-\frac{x^3}{3})\Big|_{-3}^1=\frac{5}{3}+9=\frac{32}{3}$

d) First, find the intersection of the two curves as follow:

That is $f(x)=g(x)\Rightarrow x-1=x^2-3=x^2-x-2=0\Rightarrow x=-1,2$

The region required is graphed as follow.

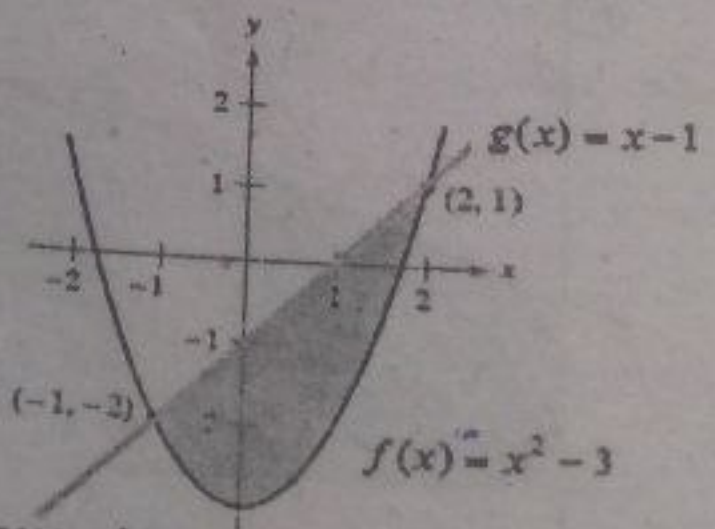

Curves with two points of intersection

Hence, $A=\int_a^b[f(x)-g(x)]dx=\int_{-1}^2(2-x-x^2)dx=(2x-\frac{x^2}{2}-\frac{x^3}{3})\Big|_{-1}^2=\frac{3}{2}$

TECNO SPARK

2. Find the area of the region:

a) Bounded by $x = 2y^2$ and $x + y = 1$.


b) Enclosed between the graphs of $y = x^2 + 2$ and $y = 2x + 5$.

c) Bounded by the curves $f(x) = x^2 - 2x + 2$ and $g(x) = 6 - x^2$

Solution:

a) First let's find the intersection points. Refer diagram below.

$$x = 2y^2$$
$$x = 1 - y$$
$$2y^2 = 1 - y$$
$$2y^2 + y - 1 = 0$$
$$(2y - 1)(y + 1) = 0$$
$$y = -1,\ 1/2$$

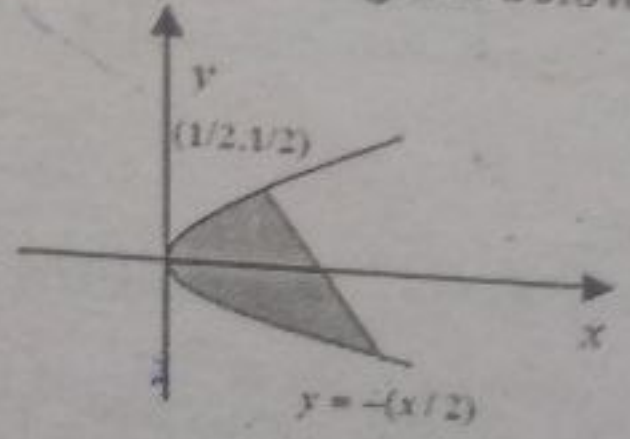


Therefore, the area is

$$A = \int_{-1}^{1/2} (1 - y - 2y^2)\,dy = \left[y - \frac{y^2}{2} - \frac{2y^3}{3} \right]_{-1}^{1/2} = \frac{1}{2} - \frac{1}{8} - \frac{1}{12} + 1 + \frac{1}{2} - \frac{2}{3} = \frac{9}{8}$$

b) First determine the limits of inegrations. This is possible by finding the intersection points of the two curves (Refer the diagram below).That is

$x^2 + 2 = 2x + 5 \Rightarrow x^2 - 2x - 3 = 0.$

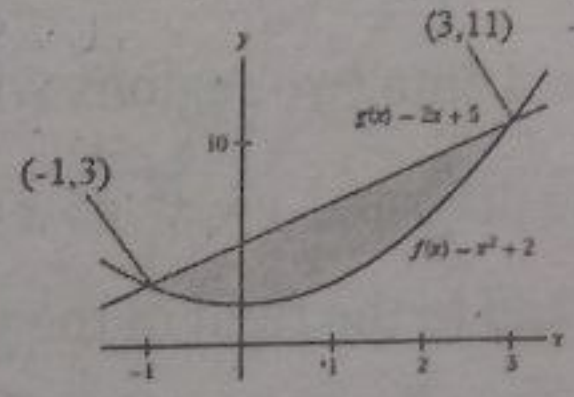


Hence, $A = \int [f(x) - g(x)]dx = \int_{-1}^{3} (3 + 2x - x^2)\,dx = 3x + x^2 - \frac{x^3}{3}\Big|_{x=-1}^{x=3} = \frac{32}{3}$

c) Refer the diagram below for the required region. First find the intersection points $x^2 - 2x + 2 = 6 - x^2 \Rightarrow 2x^2 - 2x - 4 = 0 \Rightarrow x = -1, 2$


Thus, $A = \int_{-1}^{2} (-2x^2 + 2x + 4)\,dx = \left[\frac{-2x^3}{3} + x^2 + 4x \right]_{-1}^{2}$

$= \frac{-16}{3} + 4 + 8 - \frac{2}{3} - 1 + 4 = 9$

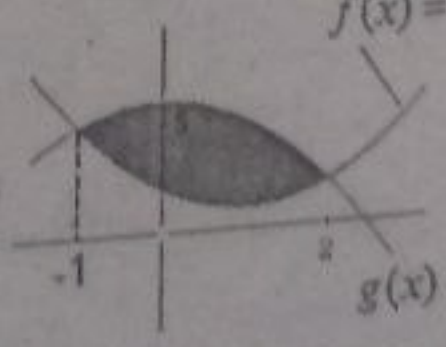


TECNO SPARK

2. Determine the area of the shaded region below.

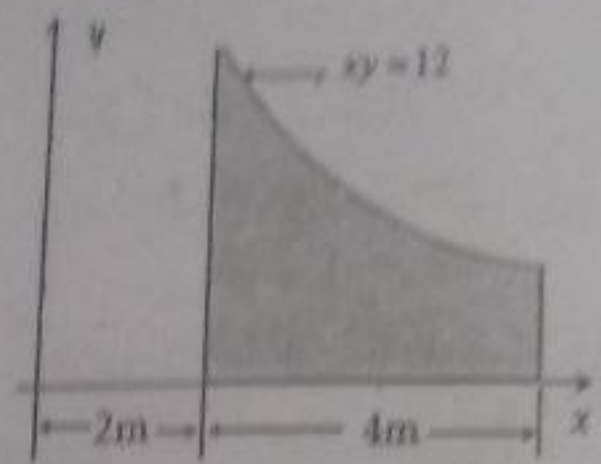

a)

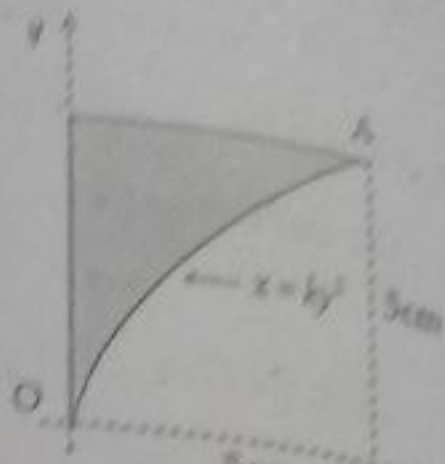

b)

Solution: a) Here, $xy = 12 \Rightarrow y = f(x) = \frac{12}{x}$.

Hence, $A = \int_a^b (x)dx = \int_2^6 \frac{12}{x} dx = 12\ln x_{x=2}^{x=6} = 12(\ln 6 - \ln 2) = 12\ln 3$

b) First, find the value of k. At point A, we have $x = 5, y = 5$.


Then, $x = ky^2 \Rightarrow 5 = k(5)^2 \Rightarrow 5 = 25k \Rightarrow k = \frac{1}{5}$.

So, the area is $A = \int_c^d f(y)dy = \int_0^5 \frac{1}{5} y^2 dy = \frac{y^3}{15}\Big|_{y=0}^{y=5} = \frac{25}{3}$.

3. Find a horizontal line $y = b$ that divides the area of a region bounded by the curves $y = x^2$ and $y = 4$ into two regions with equal area.

Solution: As we see from the diagram, $y = x^2 \Rightarrow x = \pm\sqrt{y}$.

Besides, the area to the left and to the right of the y-axis are the same.

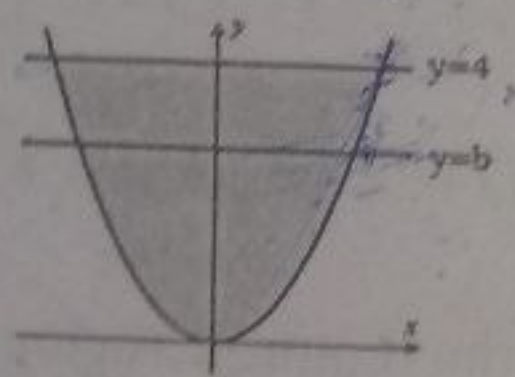

Thus, $\int_0^b 2\sqrt{y}dy = \int_b^4 2\sqrt{y}dy \Rightarrow \frac{4}{3}(y^{\frac{3}{2}})\Big|_{y=0}^{y=b} = \frac{4}{3}(y^{\frac{3}{2}})\Big|_{y=b}^{y=4}$

$$\Rightarrow \frac{4}{3}b^{\frac{3}{2}} = \frac{4}{3}(8 - b^{\frac{3}{2}}) \Rightarrow b = 2\sqrt[3]{2}$$

ይህን መጽሃፍ ኮፒ ሊያደርግ ወይም ኮፒ ሲሸጥ ባዩ ጊዜ በመጠቆም ለሚተባበሩን ሁሉ ወረታውን አንከፍላለን!

TECNO SPARK

Additivity Property of Areas: It is also common to face two curves to intersecting at more than two points. The area of a region bounded by such curves is obtained by using additivity postulate of area on non-overlapping regions.

Examples: Find the area of a region;

a) Bounded by $f(x)=x^3$ and $g(x)=4x$

b) Bounded by $f(x)=(x-1)^3$ and $g(x)=x-1$

c) Bounded by $x+y=4, x-y=0, x+3y=4$


d) Bounded by $f(x)=3x^3-x^2-10x$ and $g(x)=-x^2+2x$

Solution: The graphs of the required regions are drawn below

a) First, find the intersection of the two curves.

Intersection Points:

$$f(x)=g(x)\Rightarrow x^3=4x$$
$$\Rightarrow x^3-4x=0$$
$$\Rightarrow x(x^2-4)=0$$
$$\Rightarrow x(x-2)(x+2)=0$$
$$\Rightarrow x=0,2,-2$$

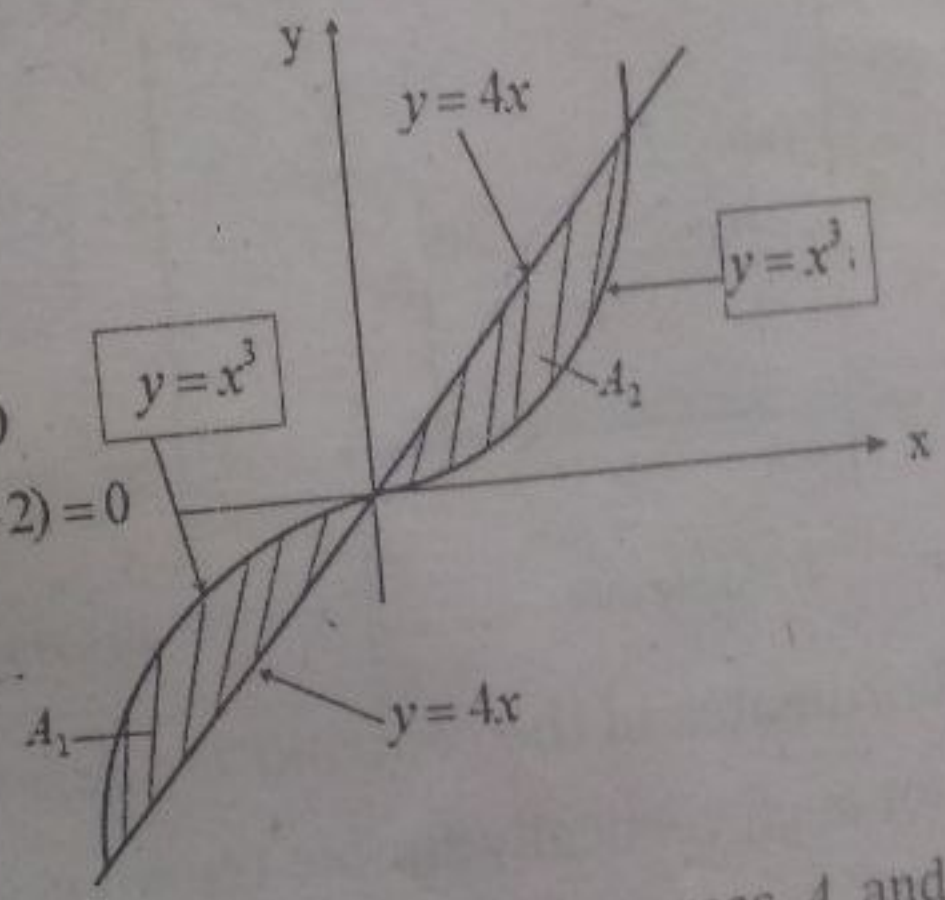

Here, the region is the union of two non-overlapping areas A_1 and A_2.

For A_1 of the first region, we have $g(x)=4x \le f(x)=x^3, \forall x \in [-2,0]$.

For A_2 of the second region, we have $f(x)=x^3 \le g(x)=4x, \forall x \in [0,2]$.

Therefore, by additivity property, the total area is calculated as follow:

$$A=A_1+A_2=\int_{-2}^{0}[f(x)-g(x)]dx+\int_{0}^{2}[g(x)-f(x)]dx$$

$$=\int_{-2}^{0}(x^3-4x)dx+\int_{0}^{2}(4x-x^3)dx=\frac{x^4}{4}-2x^2\Big|_{-2}^{0}+2x^2-\frac{x^4}{4}\Big|_{0}^{2}=8$$

ይህን መጽሃፍ ኮፒ ሊያደርግ ወይም ኮፒ ሊሸጥ ባዩ ጊዜ በመጠቀም ለሚ ተባበሩን ሁሉ መረቃዉን አንከፍላለን!

5.1.2 Determination of Centroids and Center of Mass


Centroid: Centroid of an object is the point or the geometric center at which the balance of the object is maintained.

Mathematical Computation: In general, the centroid of a surface with simple shape is determined using single integration.


Case-I: Simple case.

Suppose the region R under the graph of f above the x-axis bounded by the vertical lines $x=a$ and $x=b$ as shown in diaram-I.

Case-II: General case. Suppose the region R is bounded between the graphs of two continuous functions f and g as in the diagram-II.

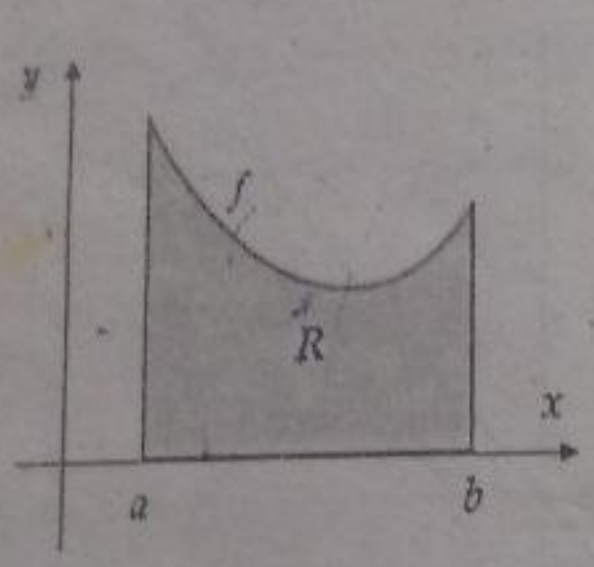

I) Simple case

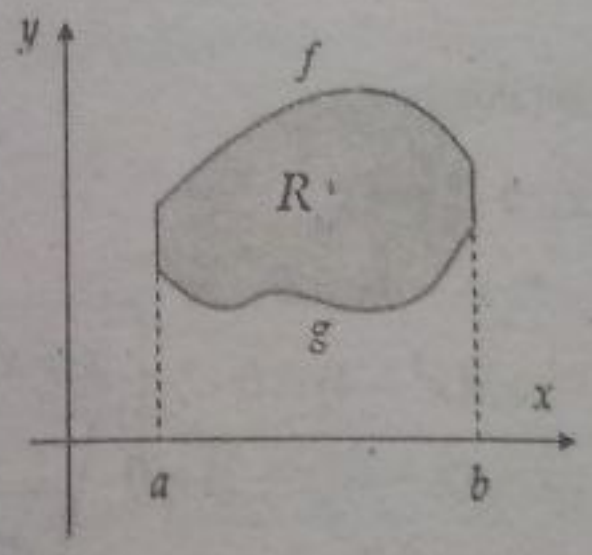

II) General case

Then, the coordinates of the centroid $C=(\bar{x},\bar{y})$ of the region R with area A are for such vertically simple region is given as follow:

I) For the simple case:


$$\begin{cases} \bar{x}A=\int_a^b xf(x)dx \Rightarrow \bar{x}=\dfrac{1}{A}\int_a^b xf(x)dx, \\ \bar{y}A=\frac{1}{2}\int_a^b [f(x)]^2dx \Rightarrow \bar{y}=\dfrac{1}{2A}\int_a^b [f(x)]^2dx \end{cases}$$

II) For the general case:

$$\begin{cases} \bar{x}A=\int_a^b x[f(x)-g(x)]dx \\ \bar{y}A=\frac{1}{2}\int_a^b \left([f(x)]^2-[g(x)]^2\right)dx \end{cases}$$

TECNO SPARK

Similarly, consider a horizontally simple region as shown below.

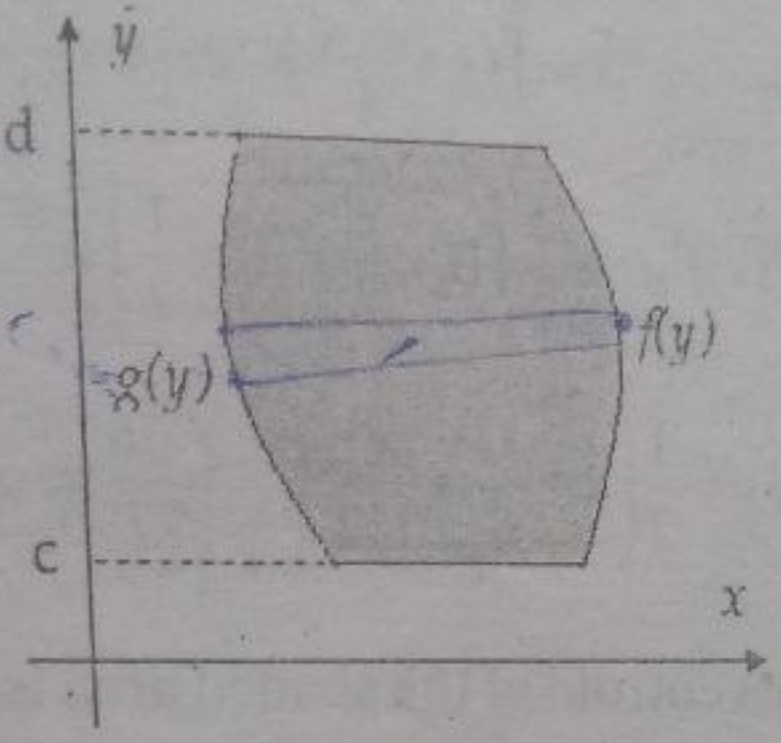


Then, we have the centroid coordinate formulas;

$$\begin{cases} A\bar{x} = \frac{1}{2}\int_c^d \left([f(y)]^2 - [g(y)]^2\right)dy \\ A\bar{y} = \int_c^d [y(f(y) - g(y)]dy \end{cases}$$

Examples:

1. Find the x and y coordinates of the centroid of the shaded area.

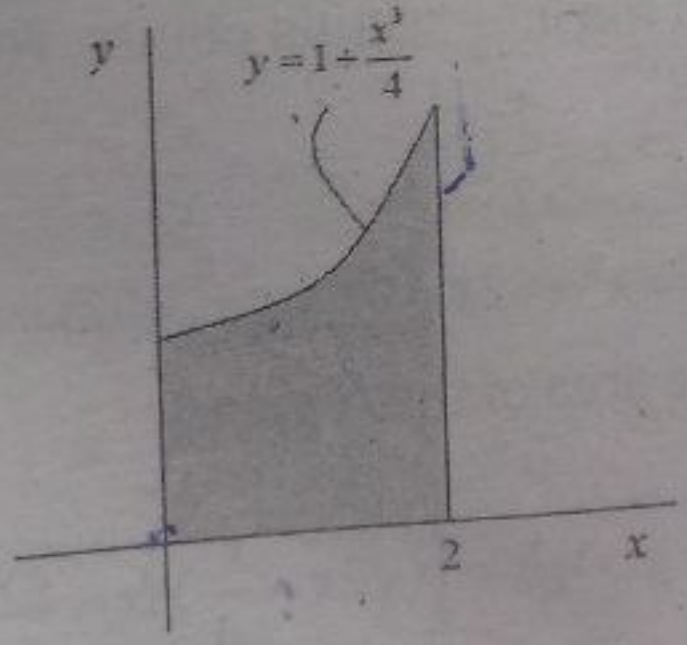

Solution: First find the area A of the shaded region

That is $A = \int_0^2 (1 + \frac{x^3}{4})dx = x + \frac{x^4}{16}\Big|_{x=0}^{x=2} = 3.$

TECNO SPARK

Then, using centroid formula, we have


$$i)\ A\bar{x}=\int_0^2 xf(x)dx \Rightarrow 3\bar{x}=\int_0^2 (x+\frac{x^4}{4})dx \Rightarrow 3\bar{x}=\frac{x^2}{2}+\frac{x^5}{20}\Big|_{x=0}^{x=2}=\frac{18}{5}\Rightarrow \bar{x}=\frac{6}{5}$$

$$ii)\ A\bar{y}=\frac{1}{2}\int_0^2 [f(x)]^2dx=\frac{1}{2}\int_0^2 (1+\frac{x^3}{4})^2dx=\frac{1}{2}\int_0^2 (1+\frac{x^3}{2}+\frac{x^6}{16})dx$$

$$\Rightarrow 3\bar{y}=\frac{1}{2}\left(x+\frac{x^4}{8}+\frac{x^7}{112}\right)\Big|_{x=0}^{x=2}=\frac{36}{7}\Rightarrow \bar{y}=\frac{12}{7}$$

Therefore, the centroid of the shaded area is $(\bar{x},\bar{y})=\left(\frac{6}{5},\frac{12}{7}\right)$.

2. Obtain the centroid of the shaded area using integration.

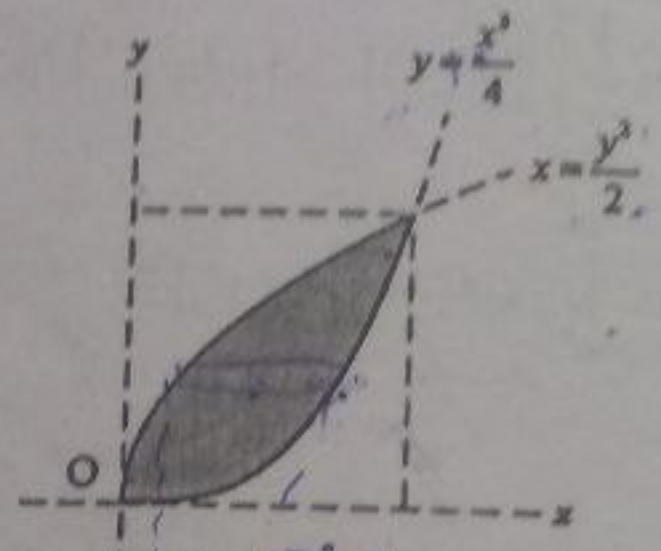

Solution: First, find the intersection points. That is

$$x=\frac{y^2}{2},\ y=\frac{x^3}{4}\Rightarrow x=\frac{1}{2}(\frac{x^3}{4})^2\Rightarrow x=\frac{x^6}{32}$$

$$\Rightarrow x^6-32x=0\Rightarrow x(x^5-32)=0\Rightarrow x=0,\ x=2$$

Now, determine the area of the region.

That is $A=\int[f(x)-g(x)]dx=\int_0^2(\sqrt{2x}-\frac{x^3}{4})dx=\frac{2\sqrt{2}x^{\frac{3}{2}}}{3}-\frac{x^4}{16}\Big|_{x=0}^{x=2}=\frac{5}{3}$

TECNO SPARK


ii) $\bar{x}A = \int \tilde{x}[f(x)-g(x)]dx \Rightarrow \frac{5}{3}\bar{x} = \int_0^2 (\sqrt{2}x^{\frac{1}{2}} - \frac{x^4}{4})dx = (\frac{2\sqrt{2}x^{\frac{3}{2}}}{3} - \frac{x^5}{20})\Big|_{x=0}^{x=2}$

$$\Rightarrow \frac{5}{3}\bar{x} = \frac{8}{5} \Rightarrow \frac{5\bar{x}}{3} = \frac{8}{5} \Rightarrow \bar{x} = \frac{24}{25}$$

ii) $\bar{y}A = \frac{1}{2}\int([f(x)]^2 - [g(x)]^2)dx = \frac{1}{2}\int_0^2 (2x - \frac{x^6}{16})dx = \frac{1}{2}(x^2 - \frac{x^7}{112})\Big|_{x=0}^{x=2} = \frac{10}{7}$

$$\Rightarrow \frac{5}{3}\bar{y} = \frac{10}{7} \Rightarrow \bar{y} = \frac{6}{7}$$

3. Determine the coordinates of the centroid of the shaded area.

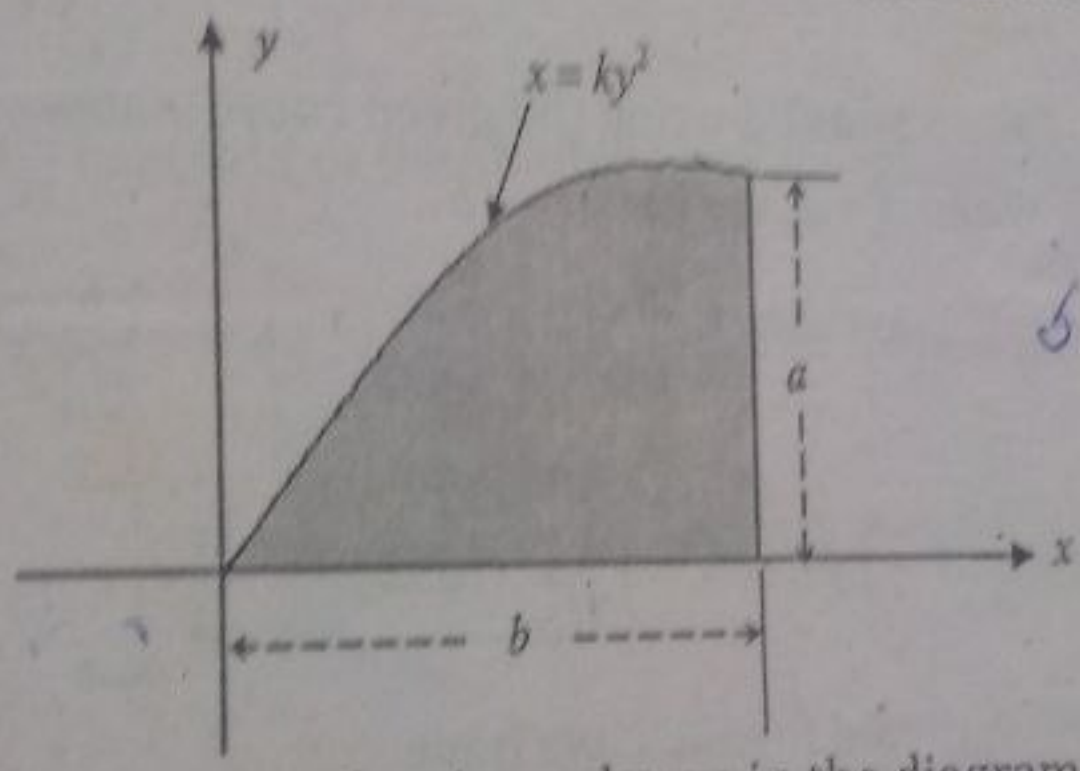

Solution: Let's use vertical strip as shown in the diagram below.

First find the area A of the shaded region.

That is $A = \int_R dA = \int_R y dx = \int_0^b \frac{a}{\sqrt{b}}\sqrt{x}dx = \frac{a}{\sqrt{b}}\int_0^b x^{\frac{1}{2}}dx = \frac{2a}{3\sqrt{b}}x^{\frac{3}{2}}\Big|_{x=0}^{x=b} = \frac{2ab}{3}$


i) $A\bar{x} = \int_0^b xf(x)dx = \int_0^b \frac{a}{\sqrt{b}}x^{\frac{3}{2}}dx = \frac{2ab^2}{5} \Rightarrow \frac{2ab}{3}\bar{x} = \frac{2ab^2}{5} \Rightarrow \bar{x} = \frac{3}{5}b$

ii) $A\bar{y} = \frac{1}{2}\int_0^b [f(x)]^2 dx = \frac{1}{2}\int_0^b \frac{a^2}{b}xdx = \frac{1}{4}a^2b \Rightarrow \frac{2ab}{3}\bar{y} = \frac{1}{4}a^2b \Rightarrow \bar{y} = \frac{3}{8}a$


Therefore, the centroid of the shaded area is $(\bar{x},\bar{y}) = (\frac{3}{5}b, \frac{3}{8}a)$.

TECNO SPARK

4. Obtain the coordinates of the centroid of the shaded area.

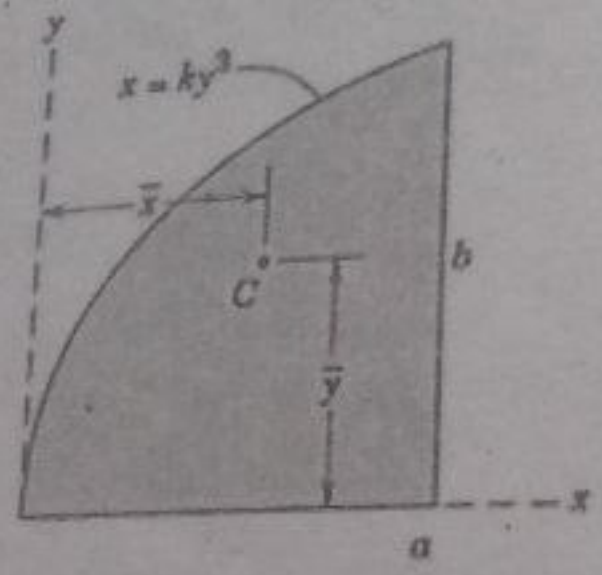

a)

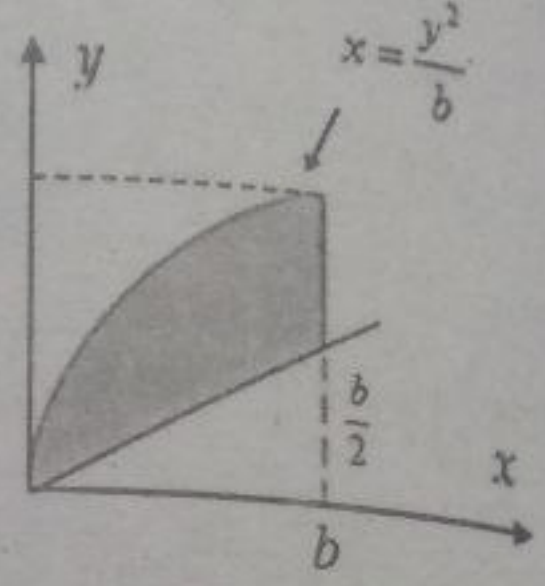

b)

Solution:

a) First, find the constant k using the given coordinates.

On the graph when $x=a$, we have $y=b$.

$$\text{So, } x=ky^3 \Rightarrow a=k(b)^3 \Rightarrow k=\frac{a}{b^3} \Rightarrow x=\frac{a}{b^3}y^3 \Rightarrow y=\frac{b}{\sqrt[3]{a}}x^{\frac{1}{3}}.$$

Then, the area is $A=\int f(x)dx=\int_0^a \frac{b}{\sqrt[3]{a}}x^{\frac{1}{3}}dx=\frac{b}{\sqrt[3]{a}}\frac{3x^{\frac{4}{3}}}{4}\Big|_{x=0}^{x=a}=\frac{3ab}{4}$

Now, using the centroid formula, we have

i) $\bar{x}A=\int xf(x)dx \Rightarrow \bar{x}A=\int_0^a x(\frac{b}{\sqrt[3]{a}}x^{\frac{1}{3}})dx=\frac{b}{\sqrt[3]{a}}\int_0^a x^{\frac{4}{3}}dx$

$$\Rightarrow \bar{x}A=\frac{b}{\sqrt[3]{a}}\frac{3x^{\frac{7}{3}}}{7}\Big|_{x=0}^{x=a} \Rightarrow \frac{3ab}{4}\bar{x}=\frac{3ba^2}{7} \Rightarrow \frac{3ab}{4}\bar{x}=\frac{3ba^2}{7} \Rightarrow \bar{x}=\frac{4a}{7}$$

ii) $\bar{y}A=\frac{1}{2}\int[f(x)]^2dx \Rightarrow \frac{3ab}{4}\bar{y}=\frac{1}{2}\int_0^a(\frac{b}{\sqrt[3]{a}}x^{\frac{1}{3}})^2dx \Rightarrow \frac{3ab}{4}\bar{y}=\frac{1}{2}\frac{b^2}{a^{\frac{2}{3}}}\int_0^a x^{\frac{2}{3}}dx$

$$\Rightarrow \frac{3ab}{4}\bar{y}=\frac{3b^2a}{10} \Rightarrow \frac{3ab}{4}\bar{y}=\frac{3b^2a}{10} \Rightarrow \bar{y}=\frac{2b}{5}$$

TECNO SPARK

b) First, determine the equation of the line bounding the region below and then compute the area of the region.

That is using slope intercept the line is $\frac{1}{2}x$. Then,


$$A=\int[f(x)-g(x)]dx=\int_0^b(\sqrt{bx}-\frac{1}{2}x)dx=\frac{2\sqrt{b}x^{\frac{3}{2}}}{3}-\frac{x^2}{4}\Big|_{x=0}^{x=b}=\frac{5b^2}{12}$$

Then, from the centroid formula, we have

$$\bar{y}A=\frac{1}{2}\int([f(x)]^2-[g(x)]^2)dx\Rightarrow\frac{5b^2\bar{y}}{12}=\frac{1}{2}\int_0^b(bx-\frac{x^2}{4})dx$$

$$\Rightarrow\frac{5b^2\bar{y}}{12}=\frac{1}{2}(\frac{bx^2}{2}-\frac{x^3}{12})\Big|_{x=0}^{x=b}=\frac{5b^3}{24}\Rightarrow\frac{5b^2\bar{y}}{12}=\frac{5b^3}{24}\Rightarrow\bar{y}=\frac{b}{2}$$

5. Obtain the centroid of the shaded area using integration.

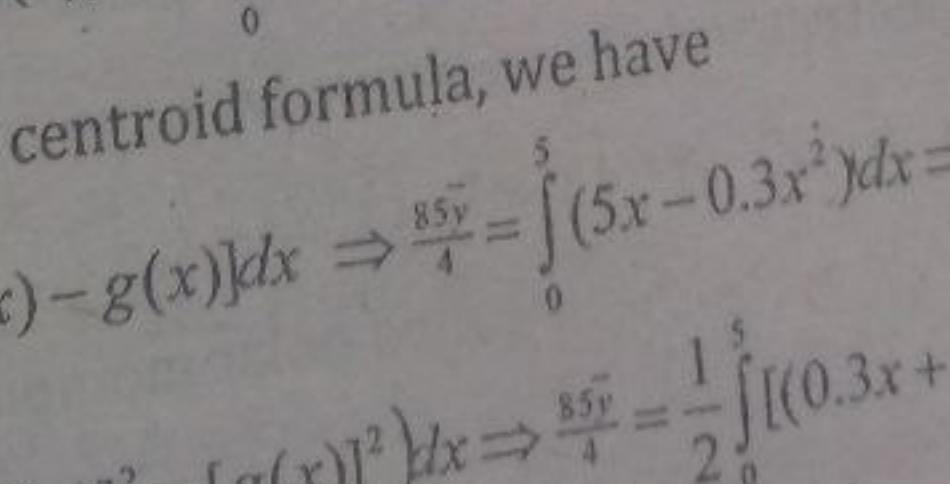

Solution: First, determine the area of the region. That is

$$A=\int[f(x)-g(x)]dx=\int_0^5[(0.3x+5)-(0.6x)]dx=\tfrac{85}{4}$$

Then, from the centroid formula, we have

i) $\bar{x}A=\int x[f(x)-g(x)]dx\Rightarrow\frac{85\bar{x}}{4}=\int_0^5(5x-0.3x^2)dx\Rightarrow\bar{x}=2.35$

ii) $\bar{y}A=\frac{1}{2}\int([f(x)]^2-[g(x)]^2)dx\Rightarrow\frac{85\bar{y}}{4}=\frac{1}{2}\int_0^5[(0.3x+5)^2-(0.6x)^2]dx$


$$\Rightarrow\frac{85\bar{y}}{4}=\frac{1}{2}\int_0^5(25+3x-0.27x^2)dx=75.67\Rightarrow\bar{y}=3.56$$

TECNO SPARK

5.1.3 Determination of Area Moments of Inertia

Rectangular and Polar Moments of Inertia

Consider the area A of a region in the xy-plane as shown below.

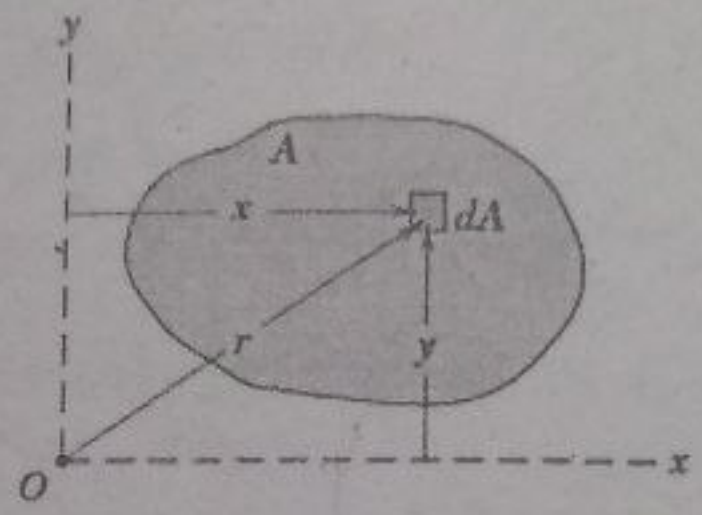

Then, the moments of inertia of the differential element dA are;

i) About x-axis: $dI_x = y^2 dA$

ii) About y-axis: $dI_y = x^2 dA$

Then, if the integration is performed over the whole area A,

i) About x-axis: $I_x = \int y^2 dA$

ii) About y-axis: $I_y = \int x^2 dA$

These two moments are called rectangular moments of inertia

Polar Moment of Inertia:


The moment of inertia of dA about the pole at O, that is about the z-axis, is defined by $I_z = I_O = \int r^2 dA$. But from polar coordinates, we have $r^2 = x^2 + y^2$. Hence, using this relation, we have

$$I_z = \int r^2 dA = \int (x^2 + y^2) dA = \int x^2 dA + \int y^2 dA = I_x + I_y$$

The moment of inertia $I_z = I_x + I_y$ is called polar moment of inertia.


TECNO SPARK


Radius of Gyration: The radius of gyration is the measure of the distribution of the area from the specified axis. A rectangular or polar moment of inertia can be expressed by specifying the radius of gyration and the area. Consider an area A having moments of inertia I_x and I_y with a polar moment of inertia I_z about O as shown.

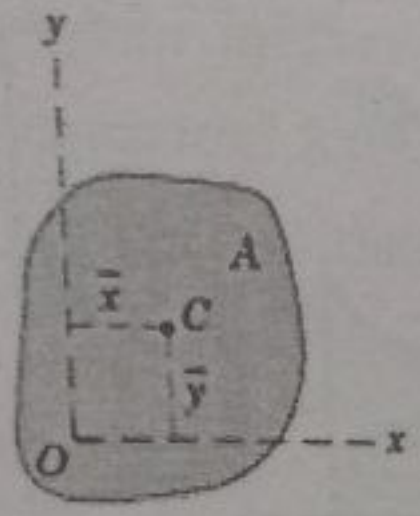


(a)

Assume a strip of area A at a distance of k_x from the x-axis.

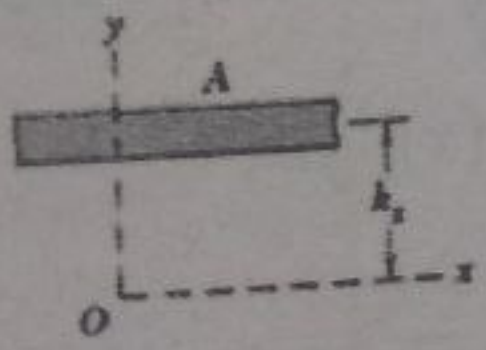

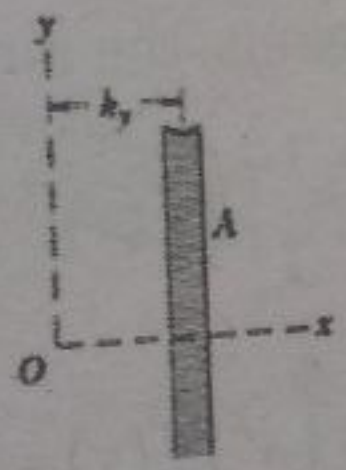

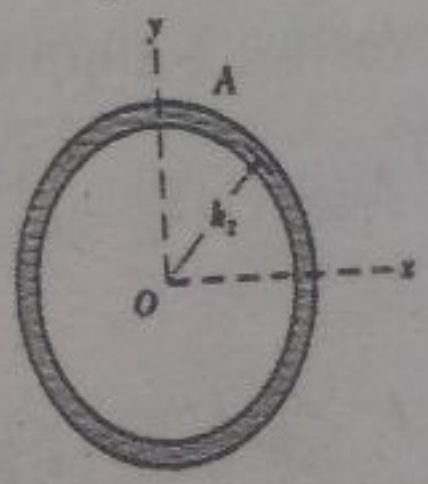

Then the moment of inertia of the strip about the x-axis will be the same as that of the original area if $I_x = k_x^2.A$, $I_y = k_y^2.A$, $I_z = k_z^2.A$. Here, the distance k_x, k_y are called radius of gyration of area.

Relation: How k_x, k_y and k_z are related?


Using the $I_x = k_x^2.A$, $I_y = k_y^2.A$, $I_z = k_z^2.A$, in the relation $I_z = I_x + I_y$, we get the relation among the three radius of gyration as follow.

$$I_z = I_x + I_y \Rightarrow Ak_z^2 = Ak_x^2 + Ak_y^2 \Rightarrow k_z^2 = k_x^2 + k_y^2 \Rightarrow k_z = \sqrt{k_x^2 + k_y^2}$$


Computational Formula of Inertia:

Case-I: For Vertically Simple Region

Suppose the region R is above the x-axis, $Y_1 = 0$ under the graph of $Y_2 = f(x)$ between two vertical lines (as in diagram-I) or R is a region bounded between the graphs of f and g as in the diagram-II.

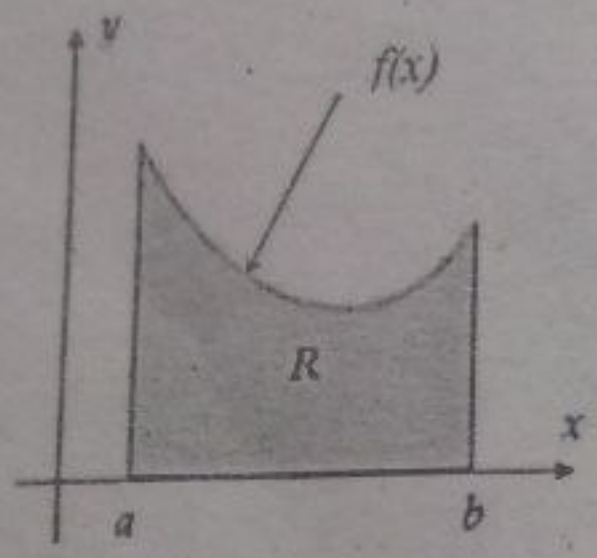

I) $R: \begin{cases} a \le x \le b \\ 0 \le y \le f(x) \end{cases}$

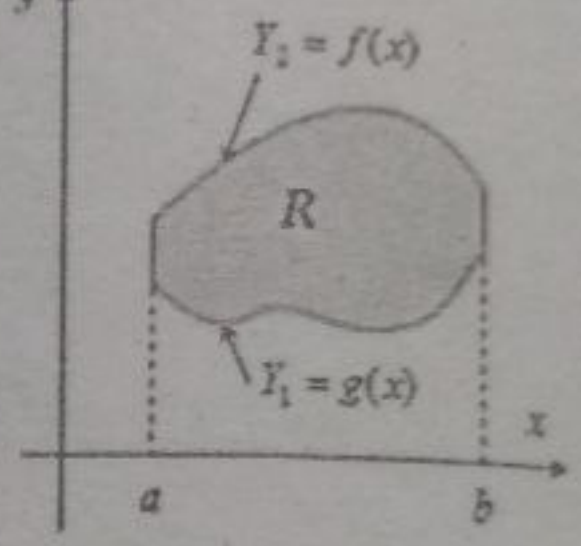

II) $R: \begin{cases} a \le x \le b \\ g(x) \le y \le f(x) \end{cases}$

Then, for vertically simple regions, the moment of inertia are

$$\text{I)} \begin{cases} I_x = \dfrac{1}{3}\int_a^b \left(Y_2^3 - Y_1^3\right)dx = \dfrac{1}{3}\int_a^b \left([f(x)]^3 - [g(x)]^3\right)dx, \\ I_y = \int_a^b x^2 [Y_2 - Y_1]dx = \int_a^b x^2 [f(x) - g(x)]dx \end{cases}$$

Case-II: For Horizontally Simple Region

For horizontally simple regions, the moment of inertia of the area is given by the formulas;


$$\text{II)} \begin{cases} I_x = \int_c^d y^2 [X_2 - X_1]dy = \int_c^d y^2 [f(y) - g(y)]dy \\ I_y = \dfrac{1}{3}\int_c^d \left(X_2^3 - X_1^3\right)dy = \dfrac{1}{3}\int_c^d \left([f(y)]^3 - [g(y)]^3\right)dy \end{cases}$$

TECNO SPARK

Transfer of Axis and Parallel Axis Theorem

Transfer of Axis:

Centroidal Axis: An axis that passes through the centroid of the area is called centroidal axis. Any axis that does not pass through the centroid of the area is called non-centroidal axis. Now, let's see how can we determine the moments of inertia of an area about a non-centridal axis parallel to the centridal axis. Consider the area with centriod at C where x_0 and y_0 are centrioidal axes.

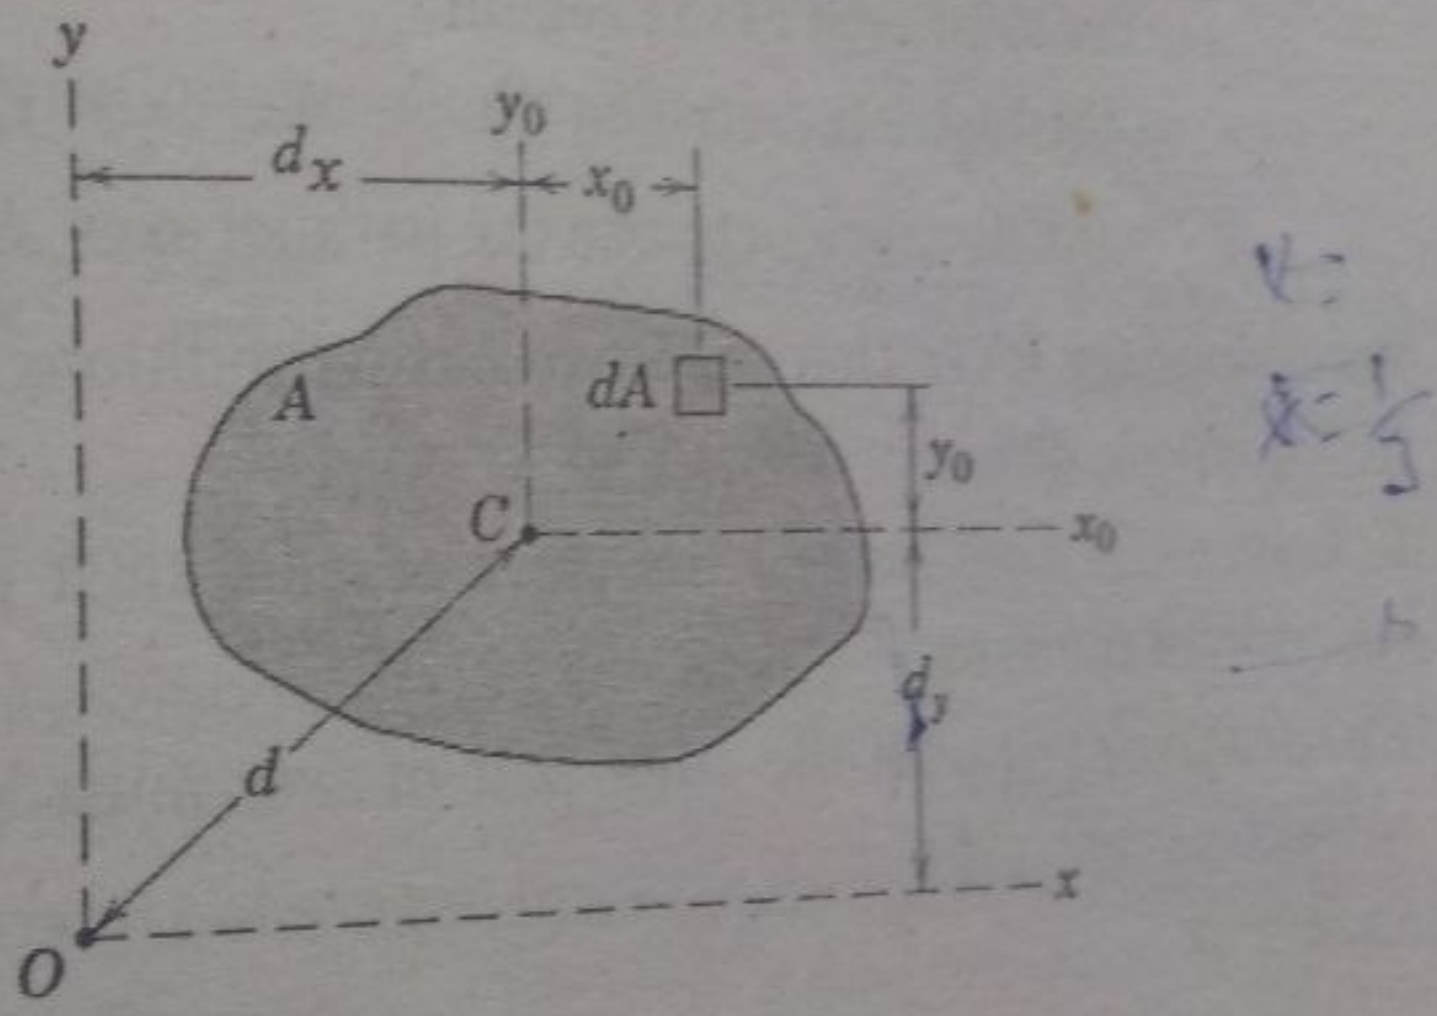

Suppose the non-centroidal axis x is parallel to x_0 and that of y is parallel to y_0. Then, from the definition of inertia,

$$I_x = \int (y_0 + d_y)^2 dA = \int (y_0^2 + 2y_0 d_y + d_y^2) dA$$

$$= \int y_0^2 dA + \int 2y_0 d_y dA + \int d_y^2 dA, \quad \left(\text{Notice that} \int 2y_0 d_y dA = 0\right)$$

$$= \int y_0^2 dA + d_y^2 \int dA$$

$$= I_{x_0} + Ad_y^2$$

Similarly, we have $I_y = I_{y_0} + Ad_x^2$. Thus, here is the generalization.

Parallel Axis Theorem (PAT):

Given, the moments of inertia of an area I_{x_0} and I_{y_0} about the centroidal axes x_0 and y_0 respectively. Then, the moments of inertia of the same area about non-cenrtroidal parallel axes are given by:

$$I_x = I_{x_0} + Ad_y^2$$

$$I_y = I_{y_0} + d_x^2 A$$

$$I_z = I_{z_0} + Ar^2, \ (I_{z_0} = I_{x_0} + I_{y_0}, r^2 = d_x^2 + d_y^2)$$

Where

A is the total area of the region

d_x is the distance between the parallel axes y_0 and y

d_y is the distance between the parallel axes x_0 and x


Conditions for PAT: There are two basic conditions to apply parallel axis theorem directly:

i) *Centroidal axes*: One of the pairs of axes must pass through the centroid of the area.

ii) *Parallelism*: One of the other pair of axes must be parallel to the respective centroidal axes.

Examples:

1. Determine the moments of inertia of the shaded area with respect to the x and y-axes and give the radius of gyration.

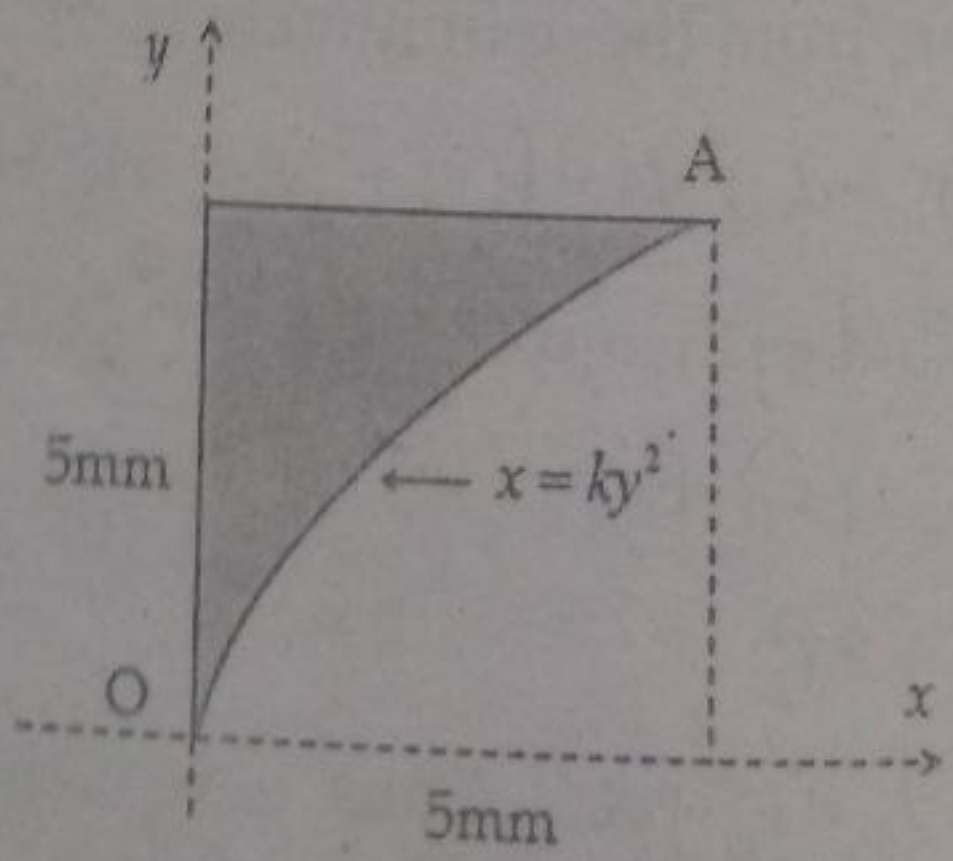

TECNO SPARK

Solution: First, find the value of k. At point A, we have $x=5, y=5$. Then, $x=ky^2 \Rightarrow 5=k(5)^2 \Rightarrow 5=25k \Rightarrow k=\frac{1}{5}$. besides, the region is horizontally simple bounded from the left by y-axis, $X_1=g(y)=0$ and from the right by $X_2=f(y)=\frac{1}{5}y^2$. Then, by the general formula,

i) $I_x=\int_0^5 y^2[X_2-X_1]dy=\int_0^5 y^2[f(y)-g(y)]dy=\frac{1}{5}\int_0^5 y^4dy=\frac{y^5}{25}\Big|_{y=0}^{y=5}=125\text{mm}^4$

ii) $I_y=\frac{1}{3}\int_0^5(X_2^3-X_1^3)dy=\frac{1}{3}\int_0^5(\frac{y^2}{5})^3dy=\frac{1}{3}\int_0^5\frac{y^6}{5}dy=\frac{y^7}{105}\Big|_{y=0}^{y=5}=\frac{625}{21}\text{mm}^4$

For the radius of gyration, first find the area of the region.


The area is $A=\int_0^5\frac{1}{5}y^2dy=\frac{y^3}{15}\Big|_{y=0}^{y=5}=\frac{25}{3}$. So, the radius of gyrations are given by $k_x=\sqrt{\frac{I_x}{A}}=\sqrt{15}$, $k_y=\sqrt{\frac{I_y}{A}}=5\sqrt{21}$.

2. For the area below, determine

a) The centroid of the area

b) The rectangular and polar moments of inertia about x and y-axes

c) The polar radius of gyration

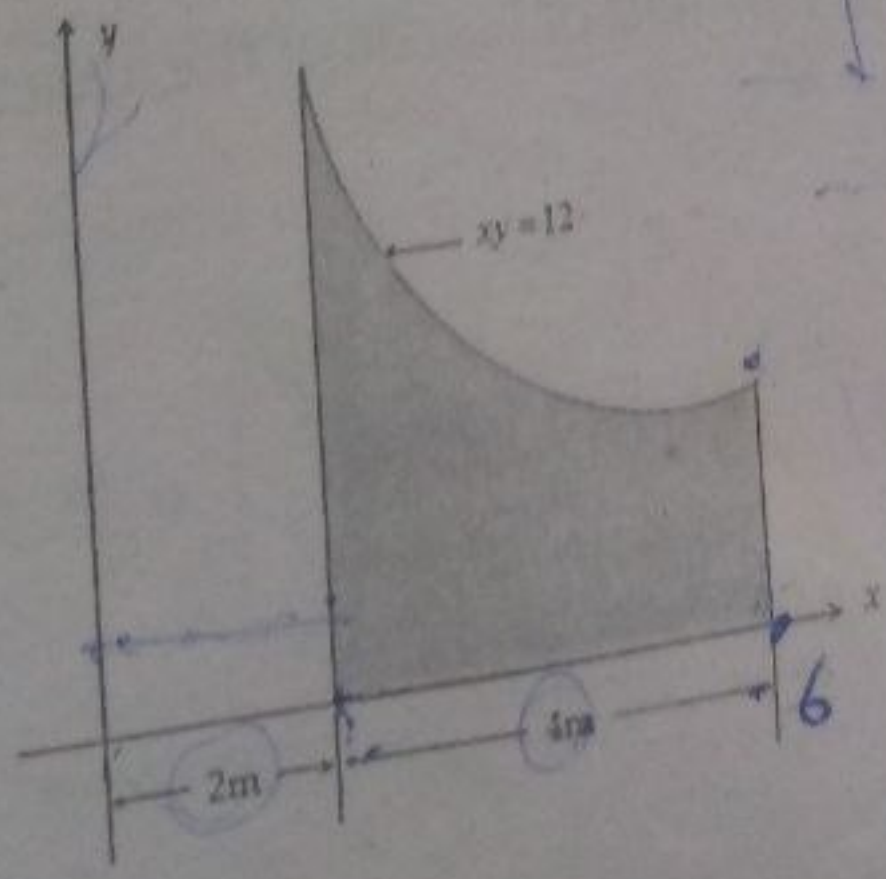

Solution:

a) We need the centroid. First, determine the area of the region. Since the region is vertically simple, its area is calculated as follow.

That is $A=\int[f(x)-g(x)]dx=\int_2^6\frac{12}{x}dx=12\ln x\Big|_{x=2}^{x=6}=12(\ln 6-\ln 2)=12\ln 3$

Then, from the centroid formula, we have

i) $A\bar{x}=\int x[f(x)-g(x)]dx \Rightarrow (12\ln 3)\bar{x}=\int_2^6 x(\frac{12}{x})dx=\int_2^6 12dx \Rightarrow \bar{x}=\frac{2}{\ln 3}$

ii) $A\bar{y}=\frac{1}{2}\int[f(x)]^2dx=\frac{1}{2}\int_2^6(\frac{12}{x})^2dx \Rightarrow (12\ln 3)\bar{y}=18\Rightarrow \bar{y}=\frac{3}{2\ln 3}$

b) The moment of inertia about x and y axes

Rectangular moments of inertia:


i) $I_x=\frac{1}{3}\int_2^6(y_2^3-y_1^3)dx=\frac{1}{3}\int_2^6(\frac{12}{x})^3]dx=\frac{1}{3}\int_2^6\frac{12^3}{x^3}dx=-\frac{1}{6}(\frac{12^3}{x^2})\Big|_{x=2}^{x=6}=64$

ii) $I_y=\int_2^6 x^2(y_2-y_1)dx=\int_2^6 x^2(\frac{12}{x})dx=\int_2^6 12xdx=192$

Polar moment of inertia: $I_z=I_x+I_y=64+192=256$

c) The polar radius of gyration: $k_z=\sqrt{\frac{I_z}{A}}=\sqrt{\frac{256}{12\ln 3}}=4.4.$

3. Determine the moment of inertia of the area about the y-axis.

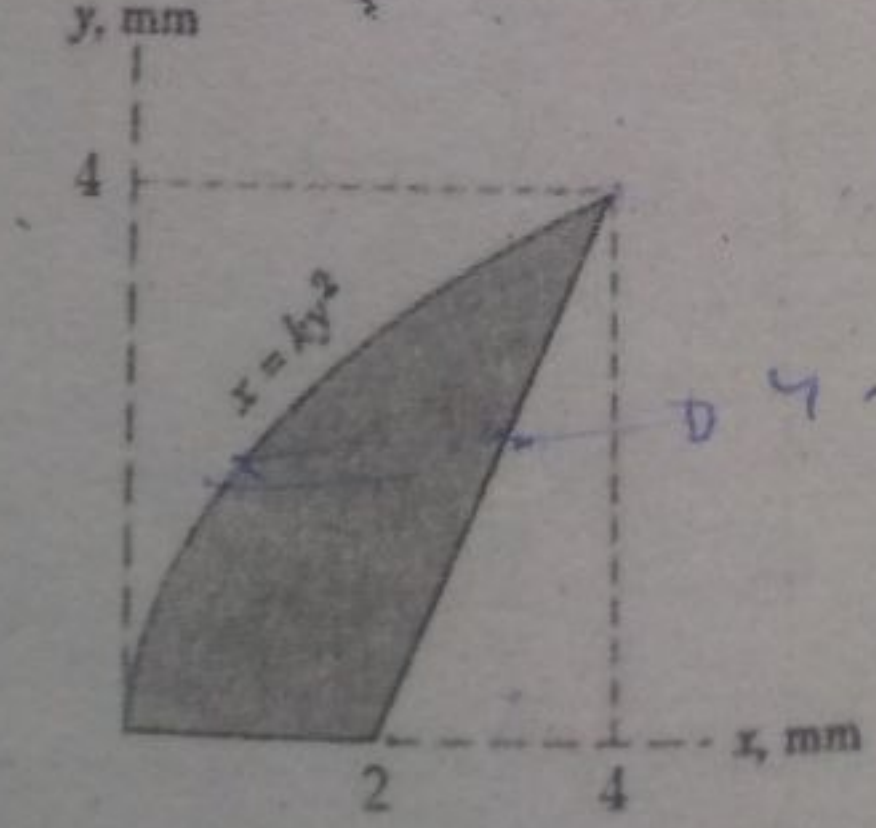

Solution: Let's use horizontally simple region.

First, find the value of k using the given dimensions.


Here, $x=4, y=4$. So, using the given function,

$x=ky^2 \Rightarrow 4=k(4)^2 \Rightarrow 4=16k \Rightarrow k=\frac{1}{4}$. The region is bounded on the left side by the curve $x_1=f(y)=\frac{1}{4}y^2$. Besides, the equation of the right side boundary of the region is obtained using slope intercept form to be $y=2x-4$. From this $x_2=\frac{y+4}{2}$.

$$I_y=\int_R \frac{1}{3}(x_2^3-x_1^3)dA=\frac{1}{3}\int_R[(2+\frac{y}{2})^3-(\frac{1}{4}y^2)^3\,dy=\frac{1}{3}\int_0^4(2+\frac{y}{2})^3\,dy-\frac{1}{3}\int_0^4\frac{y^6}{64})dy$$

$$=40-12.2=27.8mm^4$$


4. Determine the moment of inertia of the area about the y-axis.

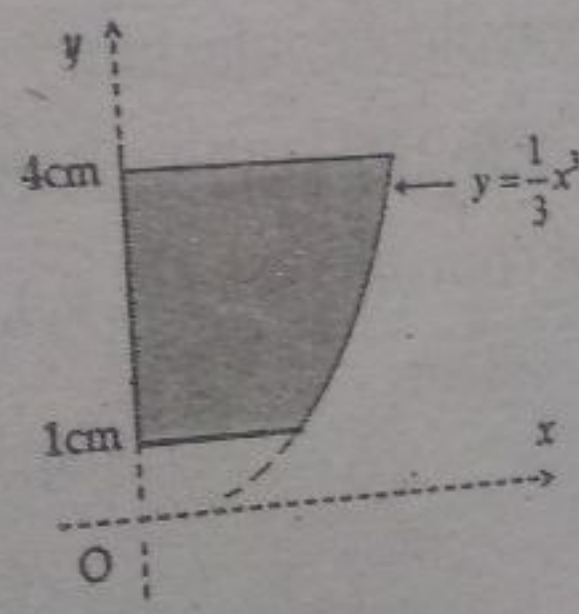

Solution: Let's use horizontally simple region.

$$I_y=\int_1^4\frac{1}{3}x^3dy=\frac{1}{3}\int_1^4(\sqrt{3y})^3\,dy=\frac{1}{3}\int_1^4 y^{\frac{3}{2}}dy=\frac{62\sqrt{3}}{5}=21.5mm^4$$

5. Determine the moment of inertia of the area about the y-axis.

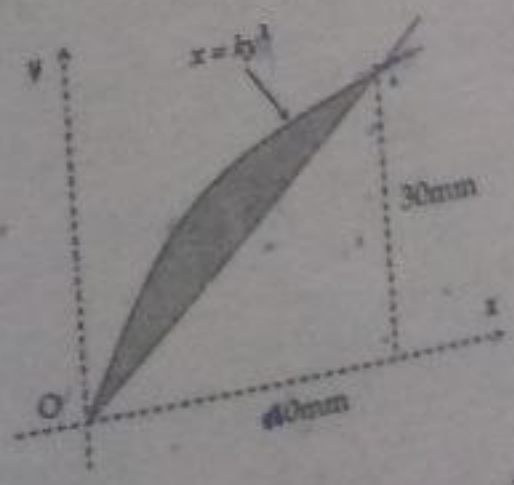

Solution: $I_y=\int_0^{30}y^2[X_2-X_1]dy=\int_0^{30}y^2(\frac{4}{3}y-\frac{4}{2700}y^3)dy=9\times10^4\,mm^4$

5.2 Centroid and Moment of Inertia for Composite Bodies


5.2.1 Centroid of Composite Areas

Principles: A region composed of two or more non overlapping regions is said to be composite body. The centroid of such body is obtained with the help of the following principles.

Principle-1: Add-subtract principle
Principle-2: Translation Principle
Principle-3: Symmetric Principle
Principe-4: Principle of sign

- *Principle-1: Add-subtract principle:* This principle simply states add the area of non overlapping regions and subtract the area of open or hollow parts during centroid calculation.

Let A be the union of non overlapping regions $A_1, A_2, A_3, \ldots, A_n$ with a corresponding centroid coordinates $(\bar{x}_1, \bar{y}_1), (\bar{x}_2, \bar{y}_2), (\bar{x}_3, \bar{y}_3), \ldots, (\bar{x}_n, \bar{y}_n)$.

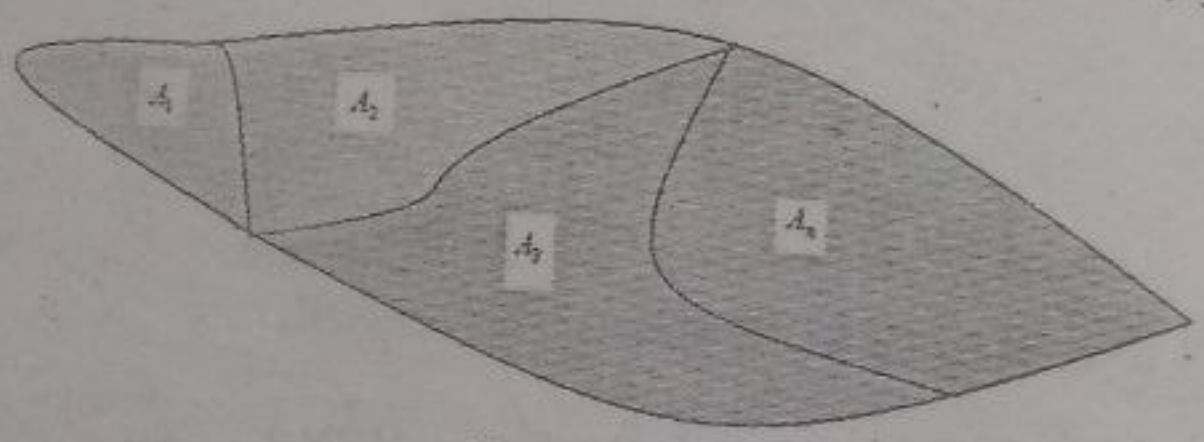

Non overlapping regions

Then, by the principle of moment, the centroid $\bar{X}$ of the total area A of the composite body is obtained as follow we have

$$A\bar{X} = A_1.\bar{x}_1 + A_2.\bar{x}_2 + A_3.\bar{x}_3 + \ldots + A_n.\bar{x}_n$$

$$\Rightarrow (A_1 + A_2 + A_3 + \ldots + A_n)\bar{X} = A_1.\bar{x}_1 + A_2.\bar{x}_2 + \ldots + A_n.\bar{x}_n$$

$$\Rightarrow \left(\sum_{i=1}^{n} A_i\right)\bar{X} = \sum_{i=1}^{n} A_i.\bar{x}_i \Rightarrow \bar{X} = \frac{\sum_{i=1}^{n} A_i.\bar{x}_i}{\sum_{i=1}^{n} A_i}.$$


Similarly, the y-coordinate of the centroid is $\bar{Y} = \frac{\sum_{i=1}^{n} A_i.\bar{y}_i}{\sum_{i=1}^{n} A_i}$.

TECNO SPARK

Furthermore, the principle also regards empty or hole of parts of the body. That means if some part of the composite body is open or a hole the centroid and area of that part is also calculated but regarded as negative value in the algebraic sum.

Principle-2: Translation Principle

Suppose the centroid of a region is $C=(\bar{x},\bar{y})$ when the boundary of the region coincides with the coordinate axes as shown.

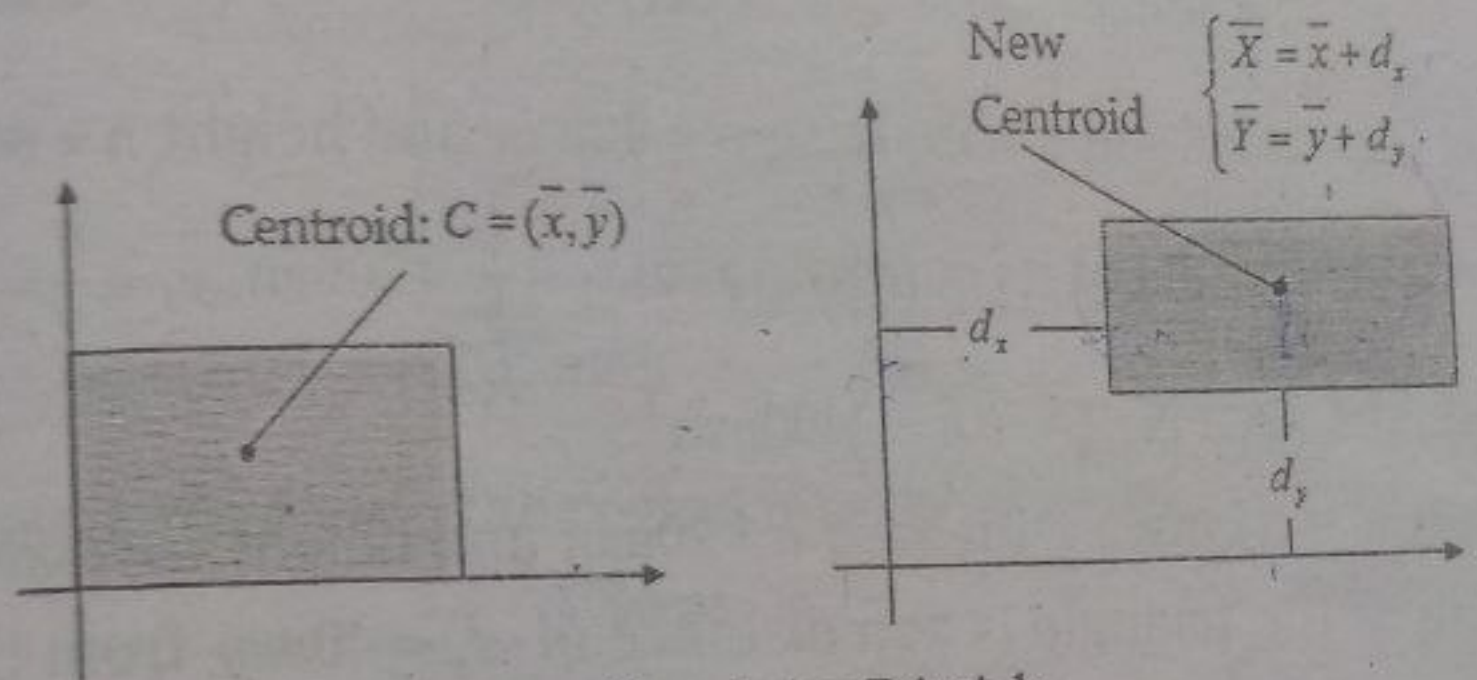


Translation Principle


If the region is located at a distance of d_x from the x-axis and at a distance of d_y from the y-axis , then the new coordinates of the centroid is $\bar{X}=\bar{x}+d_x, \bar{Y}=\bar{y}+d_y$.

Examples:

1. Determine the coordinates of the centroid of the trapezoidal area.

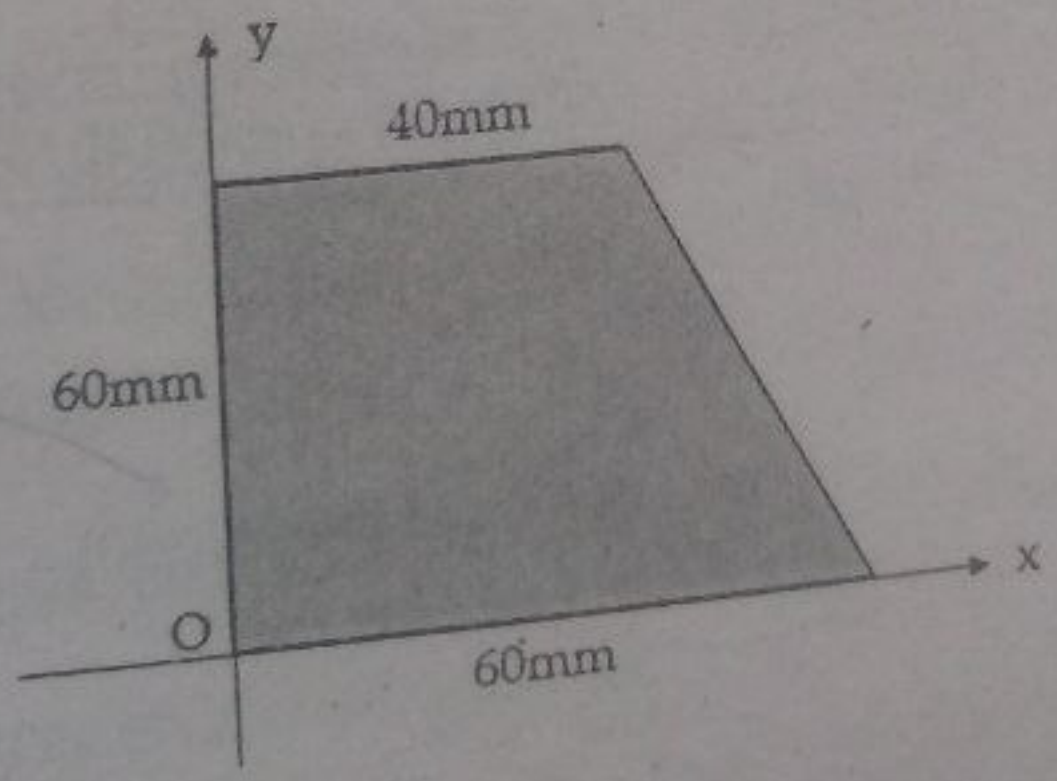

Solution: Let's divide the region into two parts.

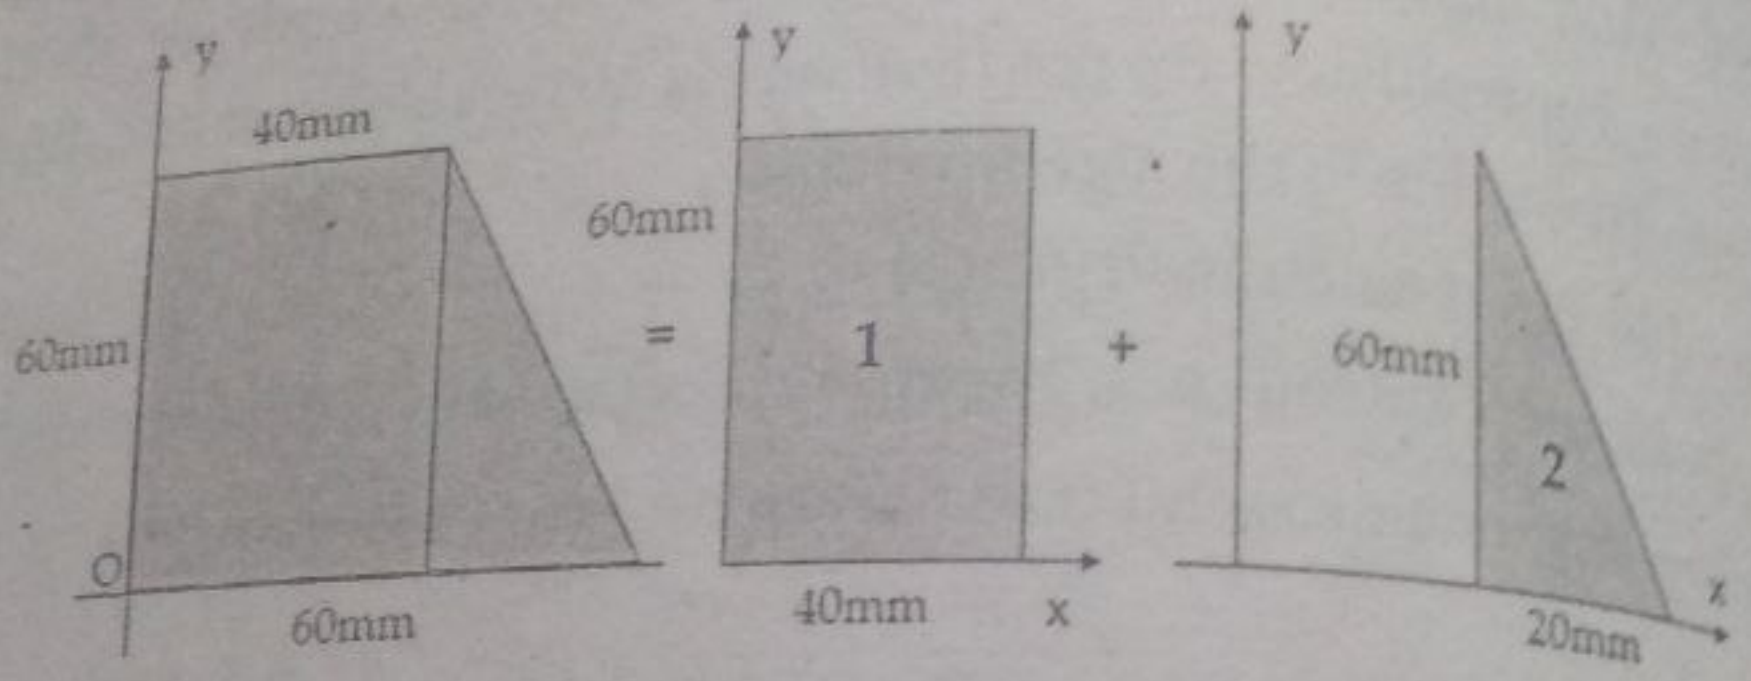

Part-1: It is a rectangle with base $b = 40\text{mm}$ and height $h = 60\text{mm}$.

So, the coordinates of its centroid are $\bar{x}_1 = \frac{b}{2} = 20\text{mm}$, $\bar{y}_1 = \frac{h}{2} = 30\text{mm}$.

Besides, the area is $A_1 = b.h = 2400\text{mm}^2$.

Part-2: It is a triangle with base $b = 20\text{mm}$ and height $h = 60\text{mm}$.

The side of the triangle is at a distance of $d_x = 40mm$ from the y-axis.

So, by the principle of translation, the coordinates of its centroid are

$\bar{x}_2 = \frac{b}{3} + d_x = \frac{20}{3}\text{mm} + 40\text{mm} = \frac{140}{3}\text{mm}$, $\bar{y}_2 = \frac{b}{3} = 20\text{mm}$

Besides, the area is $A_2 = \frac{1}{2}b.h = \frac{1}{2}(20)(60) = 600\text{mm}^2$.


Therefore, by additive principle, the coordinates of the centroid of the total area is given by

i) $\bar{X} = \frac{\sum_{i=1}^{2} A_i.\bar{x}_i}{\sum_{i=1}^{2} A_i} = \frac{A_1.\bar{x}_1 + A_2.\bar{x}_2}{A_1 + A_2} = \frac{(2400)(20) + (600)(140/3)}{2400 + 600} = 25.3\text{mm}$


ii) $\bar{Y} = \frac{\sum_{i=1}^{2} A_i.\bar{y}_i}{\sum_{i=1}^{2} A_i} = \frac{A_1.\bar{y}_1 + A_2.\bar{y}_2}{A_1 + A_2} = \frac{(2400)(30) + (600)(20)}{2400 + 600} = 28\text{mm}$

TECNO SPARK

2. Determine the coordinates of the centroid of the t area.

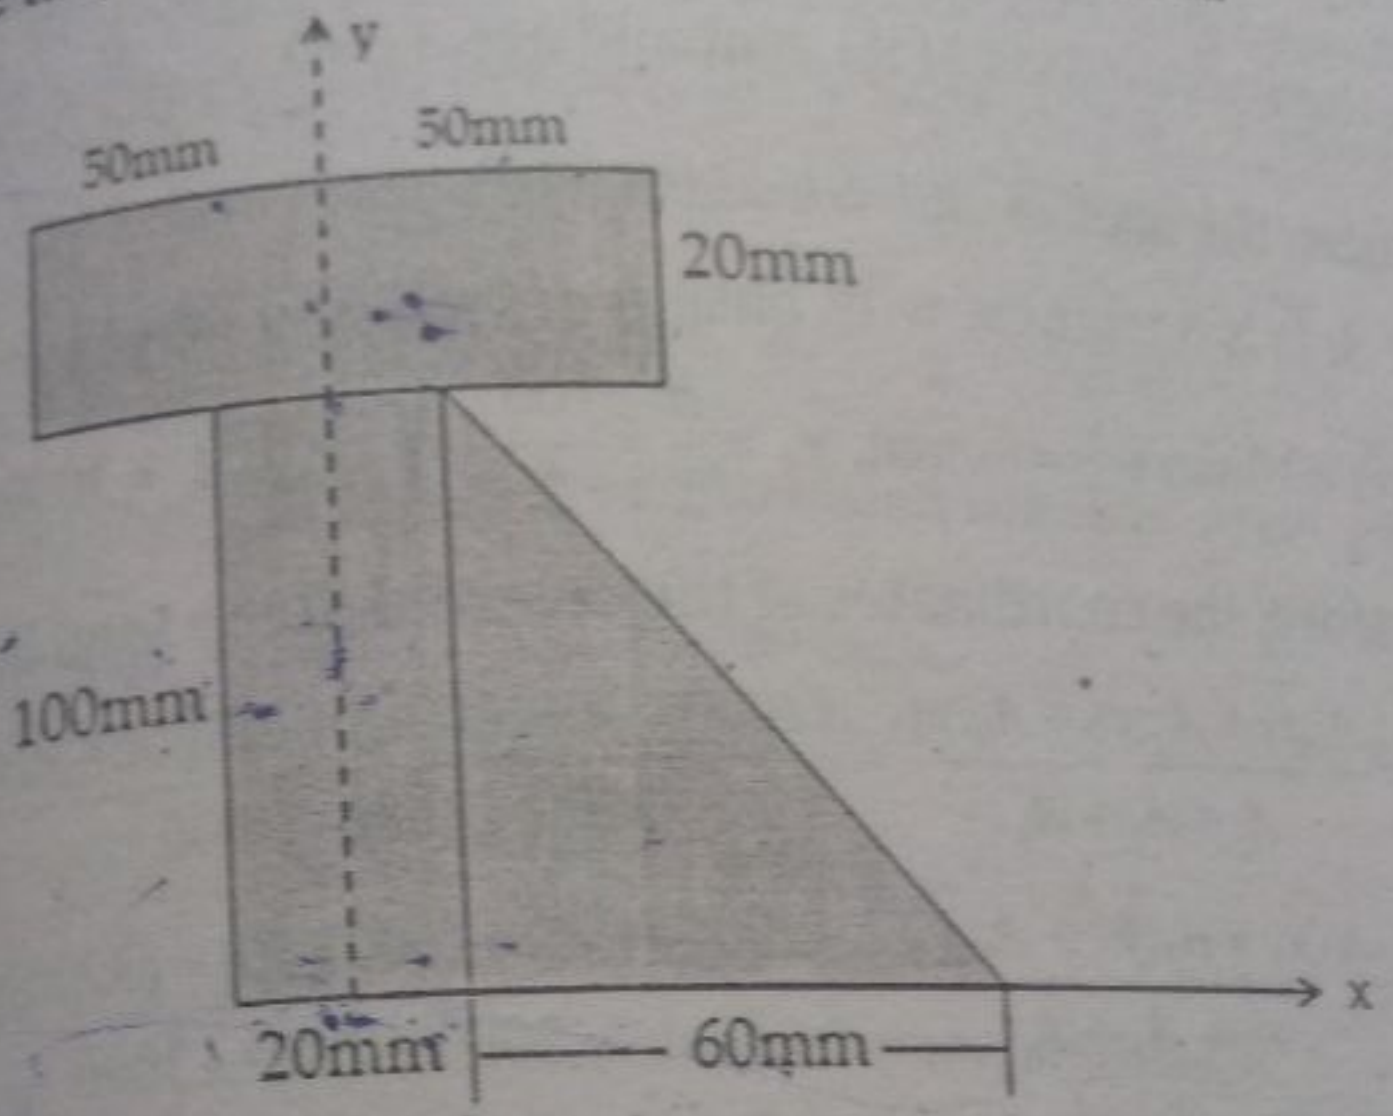

Solution: Let's divide the region into three parts.

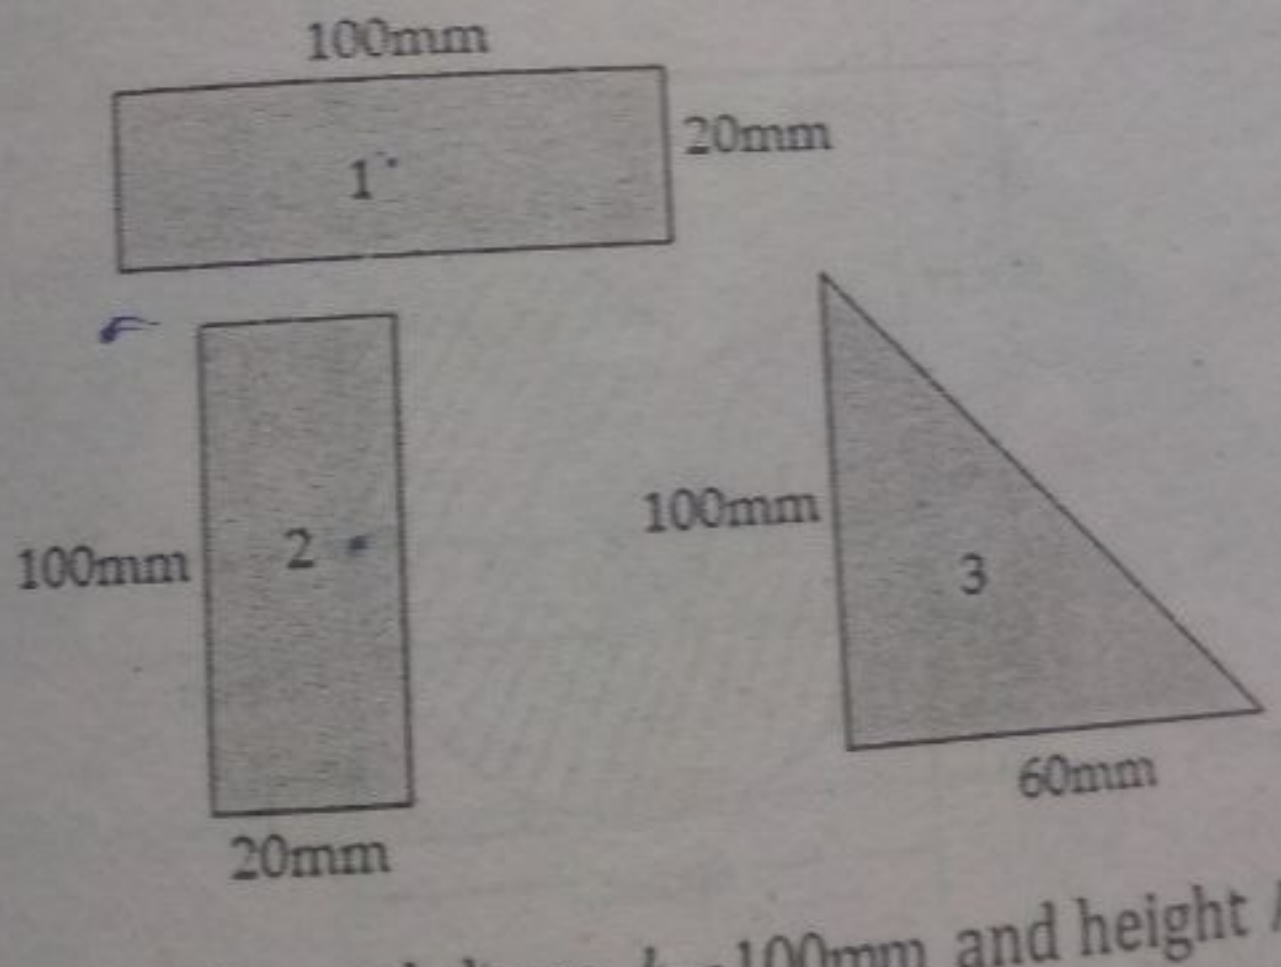

Part-1: It is a rectangle with base $b=100\text{mm}$ and height $h=20\text{mm}$. But it is symmetric about the y-axis. That means the centroid lies on the y-axis. So, the x-coordinates of its centroid is $\bar{x}_1=0$. Besides, side of the traingle is at a distance of $d_y=100mm$ from the x-axis. So, by the principle of translation, $\bar{y}_2=\frac{h}{2}+d_y=10\text{mm}+100\text{mm}=110\text{mm}$.

Also, the area is $A_1=b.h=2000\text{mm}^2$.

Part-2: It is also rectangle with base $b=20\text{mm}$ and height $h=100\text{mm}$.

So, the coordinates of its centroid are $\bar{x}_2=0,\ \bar{y}_2=\frac{h}{2}=50\text{mm}$.

Besides, the area is $A_2=b.h=2000\text{mm}^2$.

Part-3: It is a triangle with base $b=60\text{mm}$ and height $h=100\text{mm}$.


So, $\bar{x}_3=10\text{mm}+\frac{b}{3}=30\text{mm},\ \bar{y}_3=\frac{h}{3}=\frac{100}{3}\text{mm}$ and $A_3=3000\text{mm}^2$.

Therefore, the coordinates of the centroid of the total area is given by

i) $\bar{X}=\frac{A_1.\bar{x}_1+A_2.\bar{x}_2+A_3.\bar{x}_3}{A_1+A_2+A_3}=\frac{(2000)(0)+(600)(0)+(3000)(30)}{2000+2000+3000}=12.9\text{mm}$

ii) $\bar{Y}=\frac{A_1.\bar{y}_1+A_2.\bar{y}_2+A_3.\bar{y}_3}{A_1+A_2+A_3}=\frac{(2000)(110)+(600)(50)+(3000)(100/3)}{2000+2000+3000}=60\text{mm}$

3. Determine the centroid of the shaded area below.

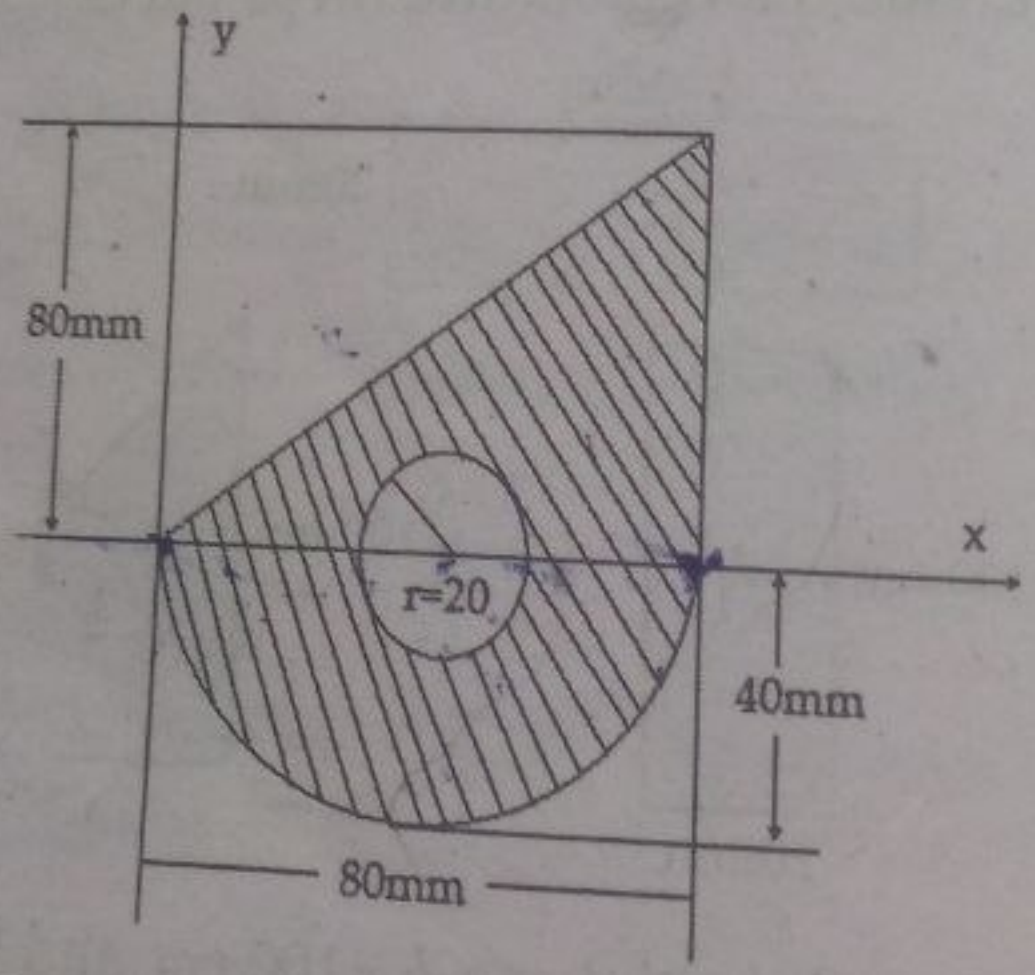

Solution: Let's divide the region into three parts.

Part-1: The triangle above the x-axis with base $b=80\text{mm}$ and height $h=80\text{mm}$. So, its area is $A_1=\frac{1}{2}b.h=3200\text{mm}^2$. Besides, the coordinates of its centroid are $\bar{x}_1=\frac{2b}{3}=53.3,\ \bar{y}_1=\frac{h}{3}=\frac{80}{3}=26.7\text{mm}$.

TECNO SPARK

Part-2: It is the circle of radius $r=20\text{mm}$. So, the coordinates of its centroid are $\bar{x}_2=40, \bar{y}_2=0$. Besides, the area is $A_2=\pi r^2=400\pi\text{mm}^2$.


Part-3: The lower semicircle of radius $r=40\text{mm}$. So, the coordinates are $\bar{x}_3=40, \bar{y}_3=-\dfrac{4R}{3\pi}=-\dfrac{160}{3\pi}$. Besides, $A_3=\dfrac{\pi r^2}{2}=800\pi\text{mm}^2$.

Therefore, the coordinates of the centroid of the total area is given by

i) $\bar{X}=\dfrac{A_1.\bar{x}_1-A_2.\bar{x}_2+A_3.\bar{x}_3}{A_1-A_2+A_3}=\dfrac{220{,}800}{4456}=49.6\text{mm}$

ii) $\bar{Y}=\dfrac{A_1.\bar{y}_1-A_2.\bar{y}_2+A_3.\bar{y}_3}{A_1-A_2+A_3}=\dfrac{42480}{4456}=9.3\text{mm}$

4. Determine the centroid of the shaded area below.

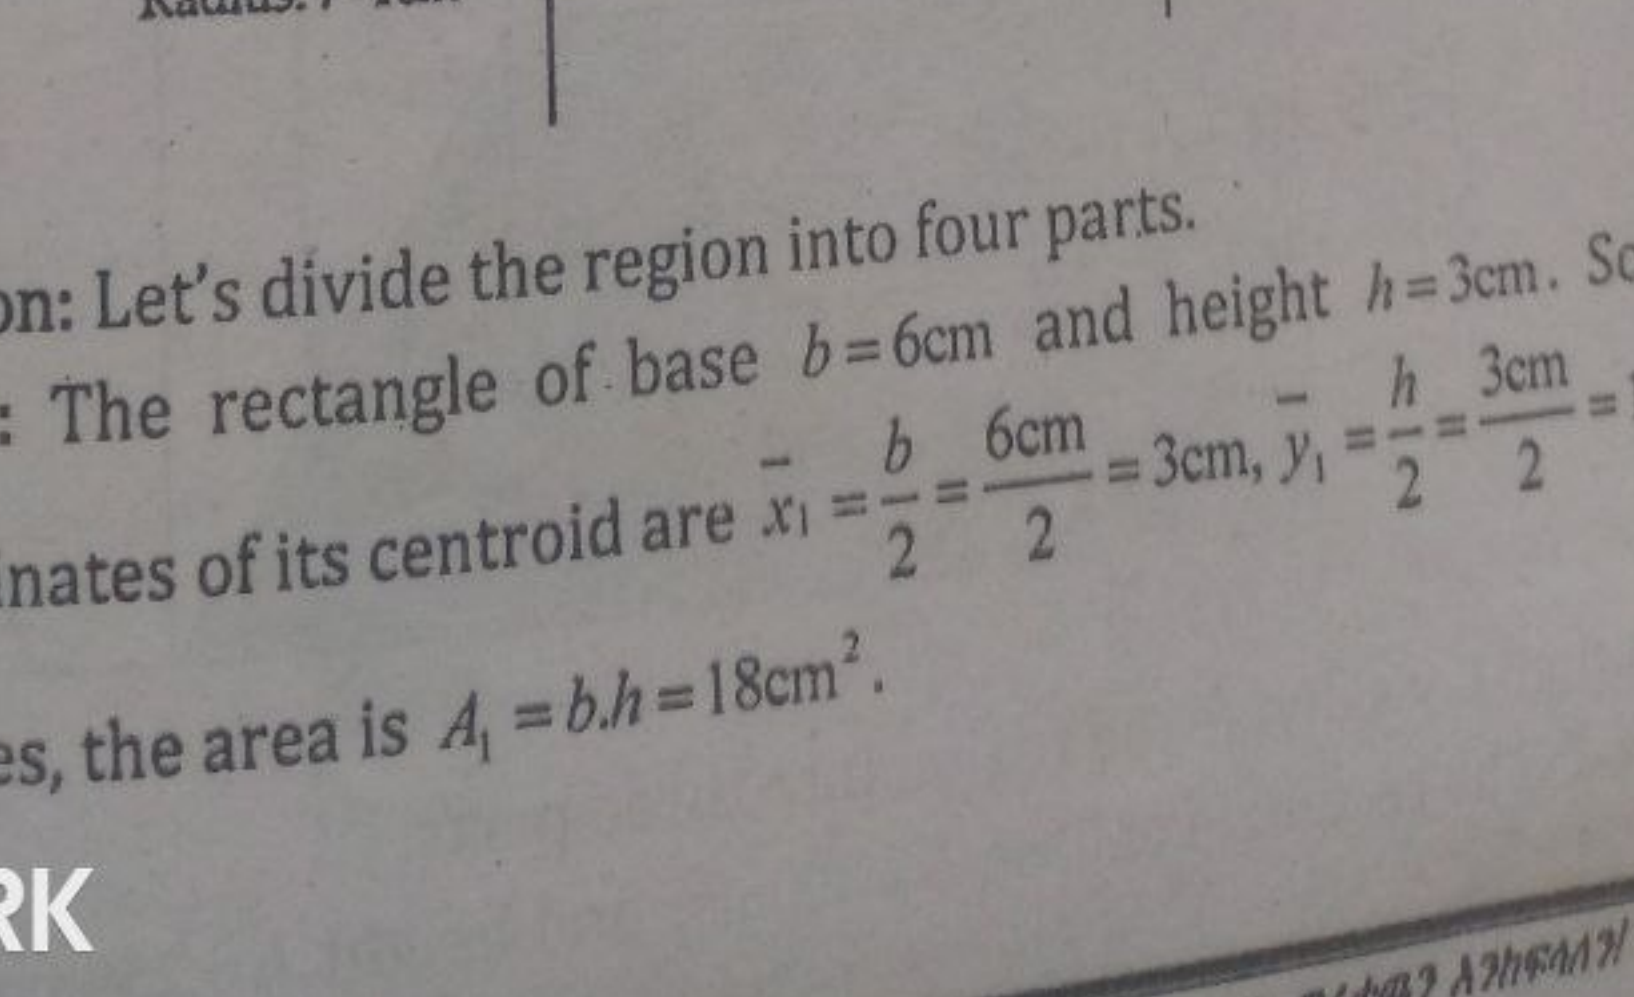

Solution: Let's divide the region into four parts.

Part-1: The rectangle of base $b=6\text{cm}$ and height $h=3\text{cm}$. So, the coordinates of its centroid are $\bar{x}_1=\dfrac{b}{2}=\dfrac{6\text{cm}}{2}=3\text{cm}, \bar{y}_1=\dfrac{h}{2}=\dfrac{3\text{cm}}{2}=1.5\text{cm}$

Besides, the area is $A_1=b.h=18\text{cm}^2$.

TECNO SPARK

Part-2: The triangle with base $b=3\text{cm}$ and height $h=3\text{cm}$. So, its area is $A_2=4.5\text{cm}^2$. Besides, the coordinates of its centroid are obtained as follow: $\bar{x}_1=$ Base of the rectangle $+\frac{h}{3}=6\text{cm}+1\text{cm}=7\text{cm}$, $\bar{y}_1=\frac{h}{3}=1\text{cm}$.

Part-3: An open semicircle of radius $r=1\text{cm}$ and center at the origin. So, the coordinates of its centroid are $\bar{x}_3=0$, $\bar{y}_3=\frac{4R}{3\pi}=\frac{4}{3\pi}\text{cm}$.

Besides, the area is $A_3=\frac{\pi r^2}{2}=\frac{\pi}{2}\text{cm}^2$.

Part-4: The quarter circle of radius $r=3\text{cm}$. So, the coordinates of its centroid are $\bar{x}_4=-\frac{4R}{3\pi}=-\frac{4}{\pi}\text{cm}$, $\bar{y}_4=\frac{4R}{3\pi}=\frac{4}{\pi}\text{cm}$.


Besides, the area is $A_4=\frac{\pi R^2}{4}=\frac{9\pi}{4}\text{cm}^2=1.25\pi\text{cm}^2$.

Therefore, the coordinates of the centroid of the total area is given by

i) $\bar{X}=\frac{A_1.\bar{x}_1+A_2.\bar{x}_2-A_3.\bar{x}_3+A_4.\bar{x}_4}{A_1+A_2-A_3+A_4}=\frac{76.5}{28}=2.73\text{cm}$

ii) $\bar{Y}=\frac{A_1.\bar{y}_1+A_2.\bar{y}_2-A_3.\bar{y}_3+A_4.\bar{y}_4}{A_1+A_2-A_3+A_4}=\frac{39.8}{28}=1.42\text{cm}$

5. Determine the centroid of the shaded area below.

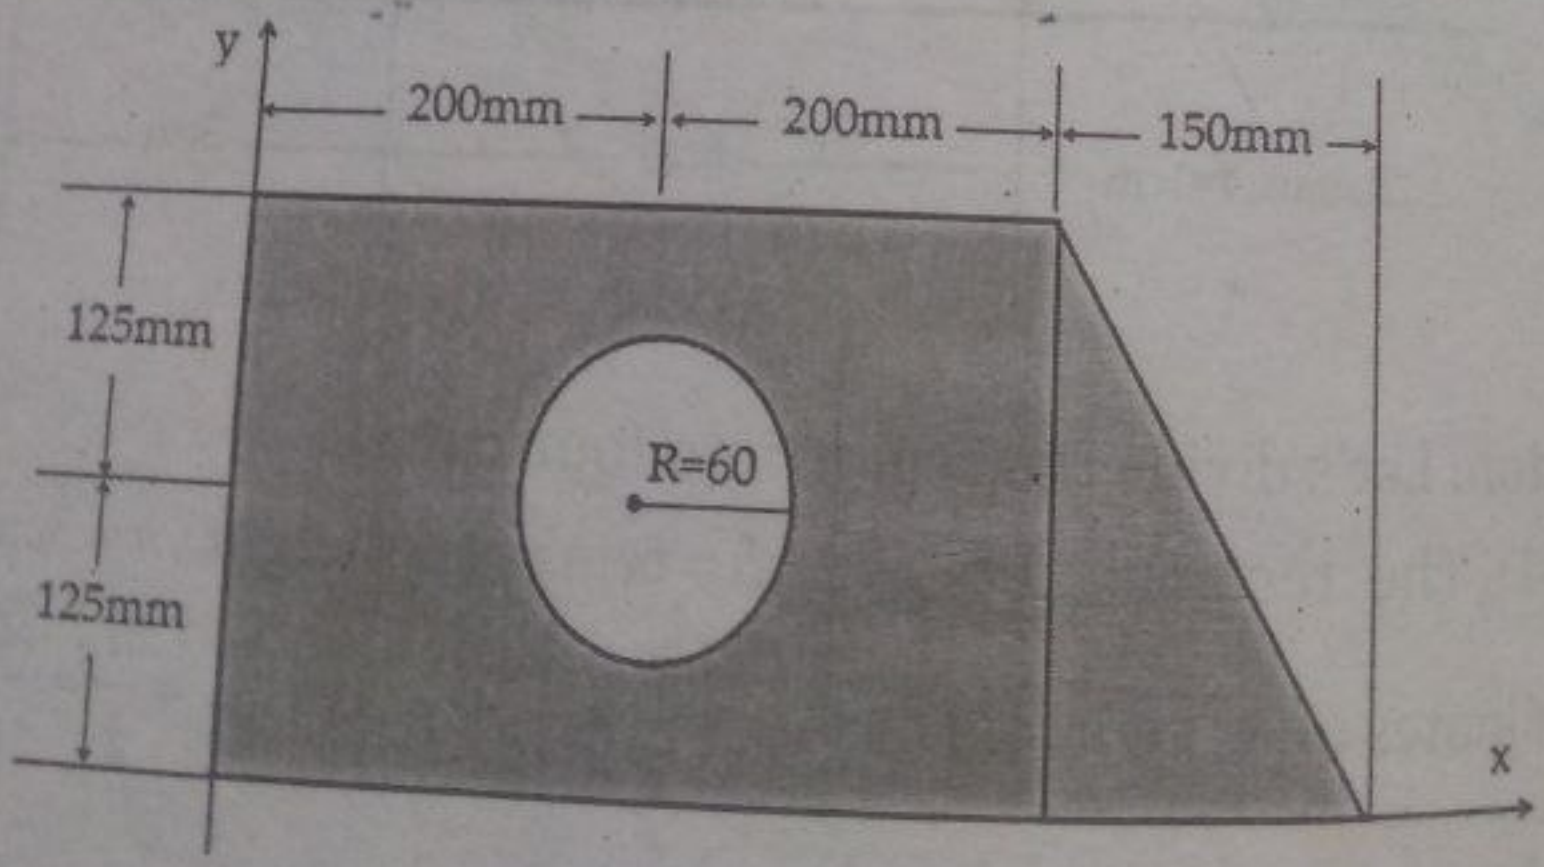

Solution: Let's divide the region into three parts.

Part-1: The rectangle of base $b=400\text{mm}$ and height $h=250\text{mm}$.

So, the coordinates of its centroid are

$\bar{x}_1 = \frac{b}{2} = \frac{400\text{mm}}{2} = 200\text{mm}$, $\bar{y}_1 = \frac{h}{2} = \frac{250\text{mm}}{2} = 125\text{mm}$

Besides, the area is $A_1 = b.h = 10^5$.

Part-2: The triangle with base $b = 150\text{mm}$ and height $h = 250\text{mm}$. So, its area is $A_2 = \frac{1}{2}b.h = 18{,}750$.

Besides, the coordinates of its centroid are obtained as follow:

$\bar{x}_2 = \text{Base of rectangle} + \frac{b}{3} = 400\text{mm} + 50\text{mm} = 450\text{mm}$, $\bar{y}_2 = \frac{h}{3} = 83.3\text{mm}$

Part-3: A circle with $R = 60\text{mm}$ and having the same center as the rectangle. That means the centroids of the circle and the rectangle coincide. So, the coordinates are $\bar{x}_3 = 200$, $\bar{y}_3 = 125$.


Besides, the area is $A_3 = \pi R^2 = 3600\pi$.

Therefore, the coordinates of the centroid of the total area is given by

i) $\bar{X} = \frac{A_1.\bar{x}_1 + A_2.\bar{x}_2 - A_3.\bar{x}_3}{A_1 + A_2 - A_3} = \frac{26.2\times10^6}{1.07\times10^5} = 244\text{mm}$

ii) $\bar{Y} = \frac{A_1.\bar{y}_1 + A_2.\bar{y}_2 - A_3.\bar{y}_3 + A_4.\bar{y}_4}{A_1 + A_2 - A_3} = \frac{12.65\times10^6}{1.01\times10^5} = 118\text{mm}$

6. Determine the coordinates of the centroid of the area.

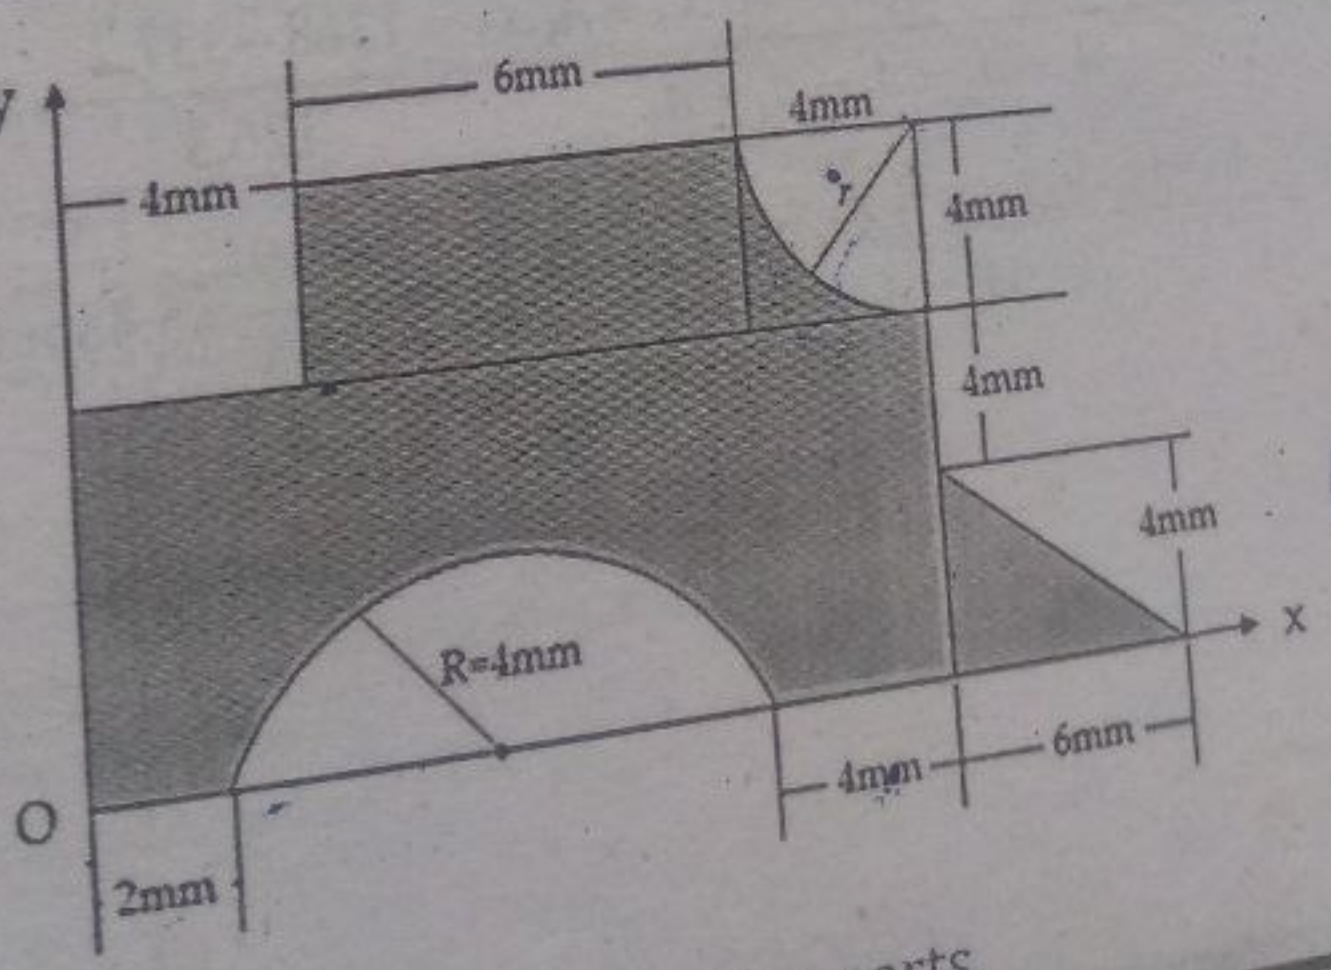

Solution: Let's divide the region into five parts.

Part-1: The largest rectangle of base $b=14\text{mm}$ and height $h=12\text{mm}$. So, the coordinates of its centroid are $\bar{x}_1=7,\ \bar{y}_1=6$.

Besides, the area is $A_1=b.h=168\text{mm}^2$.

Part-2: The open rectangle of base $b=4\text{mm}$ and height $h=4\text{mm}$. So, the coordinates of its centroid are $\bar{x}_2=2,\ \bar{y}_2=8+2=10$.

Besides, the area is $A_2=b.h=16\text{mm}^2$.

Part-3: A semicircle of radius $R=4\text{mm}$ and the area is $A_3=\frac{\pi R^2}{2}=8\pi$.

So, the coordinates of its centroid are $\bar{x}_3=2+4=6,\ \bar{y}_3=\frac{4R}{3\pi}=\frac{16}{3\pi}$.

Part-4: A quarter circle of radius $R=4$ and the area is $A_4=\frac{\pi R^2}{4}=4\pi$.

So, the coordinates of its centroid are

$$\bar{x}_4=10+(4-\frac{4R}{3\pi})=14-\frac{16}{3\pi}=12.3,\ \bar{y}_4=8+(4-\frac{4R}{3\pi})=12-\frac{16}{3\pi}=10.3$$

Part-5: The triangle with base $b=6\text{mm}$ and height $h=4\text{mm}$.

So, $\bar{x}_5=14+\frac{b}{3}=16,\ \bar{y}_5=\frac{h}{3}=\frac{4}{3}$. Besides, the area is $A_5=12\text{mm}^2$.

Therefore, the coordinates of the centroid of the total area is given by

i) $$\bar{X}=\frac{A_1.\bar{x}_1-A_2.\bar{x}_2-A_3.\bar{x}_3-A_4.\bar{x}_4+A_5.\bar{x}_5}{A_1-A_2-A_3-A_4+A_5}=\frac{1368-337.2}{126.3}=8.2\text{mm}$$

ii) $$\bar{Y}=\frac{A_1.\bar{y}_1-A_2.\bar{y}_2-A_3.\bar{y}_3-A_4.\bar{y}_4+A_5.\bar{y}_5}{A_1-A_2-A_3-A_4+A_5}=\frac{691.9}{126.3}=5.48\text{mm}$$

TECNO SPARK

5.2.2 Moments of Inertia for Composite Areas

In many situations, we encounter to calculate the moment of inertia of an area composed of two or more distinct parts of simple and basic geometric shapes. The union of two or more non-overlapping regions is called composite area. Then, the moment of a composite area about a particular axis is the algebraic sum of the moments of inertia of its component parts about the same axis.

Procedures to find moment of inertia for composite area:

Step-1: Determination of moments of different parts.

Divide the composite area into different parts. For each part, select appropriate coordinate axes and compute the moments.

Step-2: Transferring into a common axis

Check if transferring is needed or not for each moment. Of course, some of them may not need transferring but for these where transferring is needed use Parallel Axis Theorem to transfer into the common axis about which the moment of the area is asked. For some parts, repeated application of parallel axis theorem may be needed.

Step-3: Summarization of results. To simplify the calculation, use the table of the following form. When you tabulate values make the moments of the open parts of the area as negative.

Parts	Area Of parts	Distance between centoid of parts and the COMMON axis		Transferring element		Moments of parts about centroidal axis	
		d_x	d_y	Ad_x^2	Ad_y^2	$\bar{I}_x$	$\bar{I}_y$
1							
2							
3							
4							
SUMS	$\sum A_i$			$\sum Ad_x^2$;	$\sum Ad_y^2$;	$\sum I_x$	$\sum I_y$

Using the sum of the four columns,

TECNO SPARK

i) Rectangular and polar moments of inertia;

$$I_x = \sum \bar{I}_x + \sum A.d_y^2, \quad I_y = \sum \bar{I}_y + \sum A.d_x^2, \quad I_z = I_x + I_y$$


ii) Rectangular and polar radius of gyrations;

$$k_x = \sqrt{\frac{I_x}{A}}, \quad k_y = \sqrt{\frac{I_y}{A}}, \quad k_z = \sqrt{\frac{I_z}{A}}$$


Examples:


1. Consider a composite area with $a = \sqrt{3}mm$ as shown below.


Determine the moment of inertia of the shaded area about the x-axis,

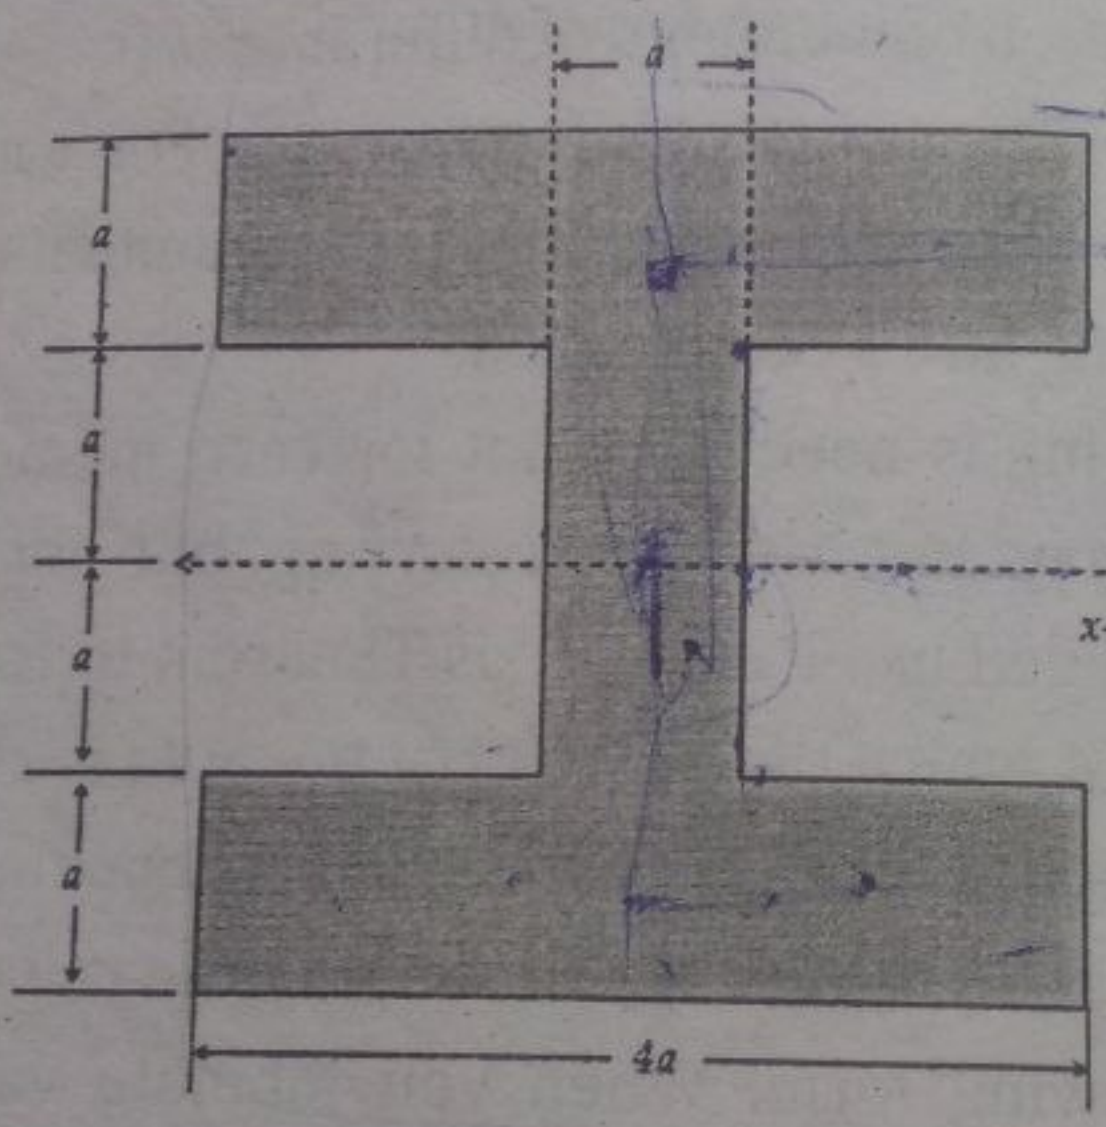

Solution: Let's divide the region into three parts.

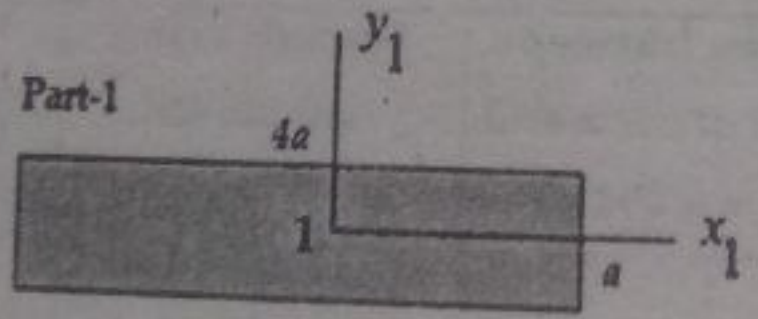

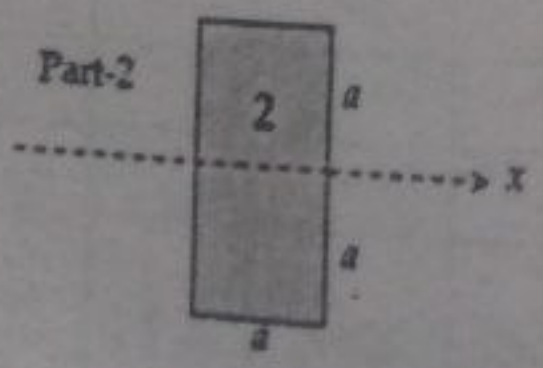

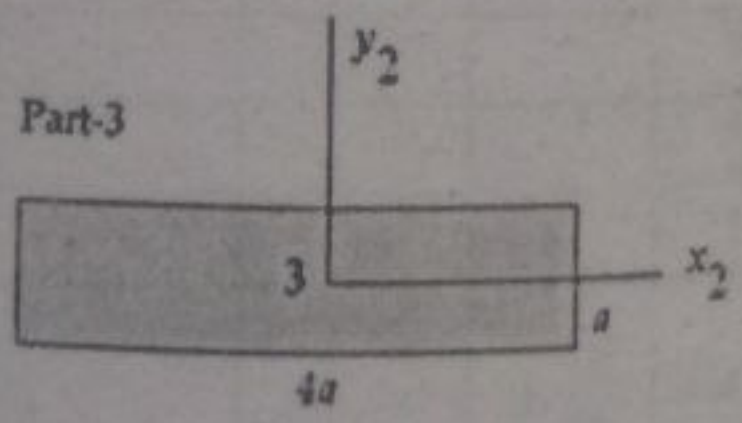

TECNO SPARK

Part-1: It is a rectangle with base $b=4a$ and height $h=a$. From moment of inertia of area of a rectangle, the moment of inertia of the rectangular area of part-1 about x_1-axis is $\bar{I}_{x_1}=\frac{bh^3}{12}=\frac{4a^4}{12}=\frac{a^4}{3}$.

Besides, its area is $A_1=(4a)(a)=4a^2$.

Then, by Parallel Axis Theorem, it is transferred to x-axis as

$$I_{1x}=\bar{I}_{x_1}+Ay^2=\frac{a^4}{3}+4a^2(\frac{3a}{2})^2=\frac{a^4}{3}+9a^4=\frac{28a^4}{3}$$

Part-2: It is also a rectangle with base $b=a$ and height $h=2a$.

The moment for this part is calculated directly about x-axis.

So, using similar formula, we have $I_{2x}=\frac{bh^3}{12}=\frac{8a^4}{12}=\frac{2a^4}{3}$.

Part-3: It is the same with part-1. That is $\bar{I}_{x_2}=\frac{bh^3}{12}=\frac{4a^4}{12}=\frac{a^4}{3}$.

Then, by Parallel Axis Theorem, it is transferred to x-axis as

$$I_{3x}=\bar{I}_{x_2}+Ay^2=\frac{a^4}{3}+4a^2(\frac{3a}{2})^2=\frac{a^4}{3}+9a^4=\frac{28a^4}{3}$$

Therefore, the total moment of inertia of the entire composite area is determined by taking the sum of the three moments.

That is $I_x=I_{1x}+I_{2x}+I_{3x}=\frac{28a^4}{3}+\frac{2a^4}{3}+\frac{28a^4}{3}=\frac{58a^4}{3}$


In particular, for $a=\sqrt{3}\text{mm}$, we have

$$I_x=\frac{58a^4}{3}=\frac{58(\sqrt{3}\text{mm})^4}{3}=\frac{58(9\text{mm}^4)}{3}=58(3\text{mm}^4)=174\text{mm}^4.$$


Notice that in this example, transferring is not needed for the moment of part-2 because its centroidal axes are the common axes about which the moment of the total area is asked.


TECNO SPARK


2. Determine the moments of inertia of the Z-section about the centroidal axes x_0 and y_0.

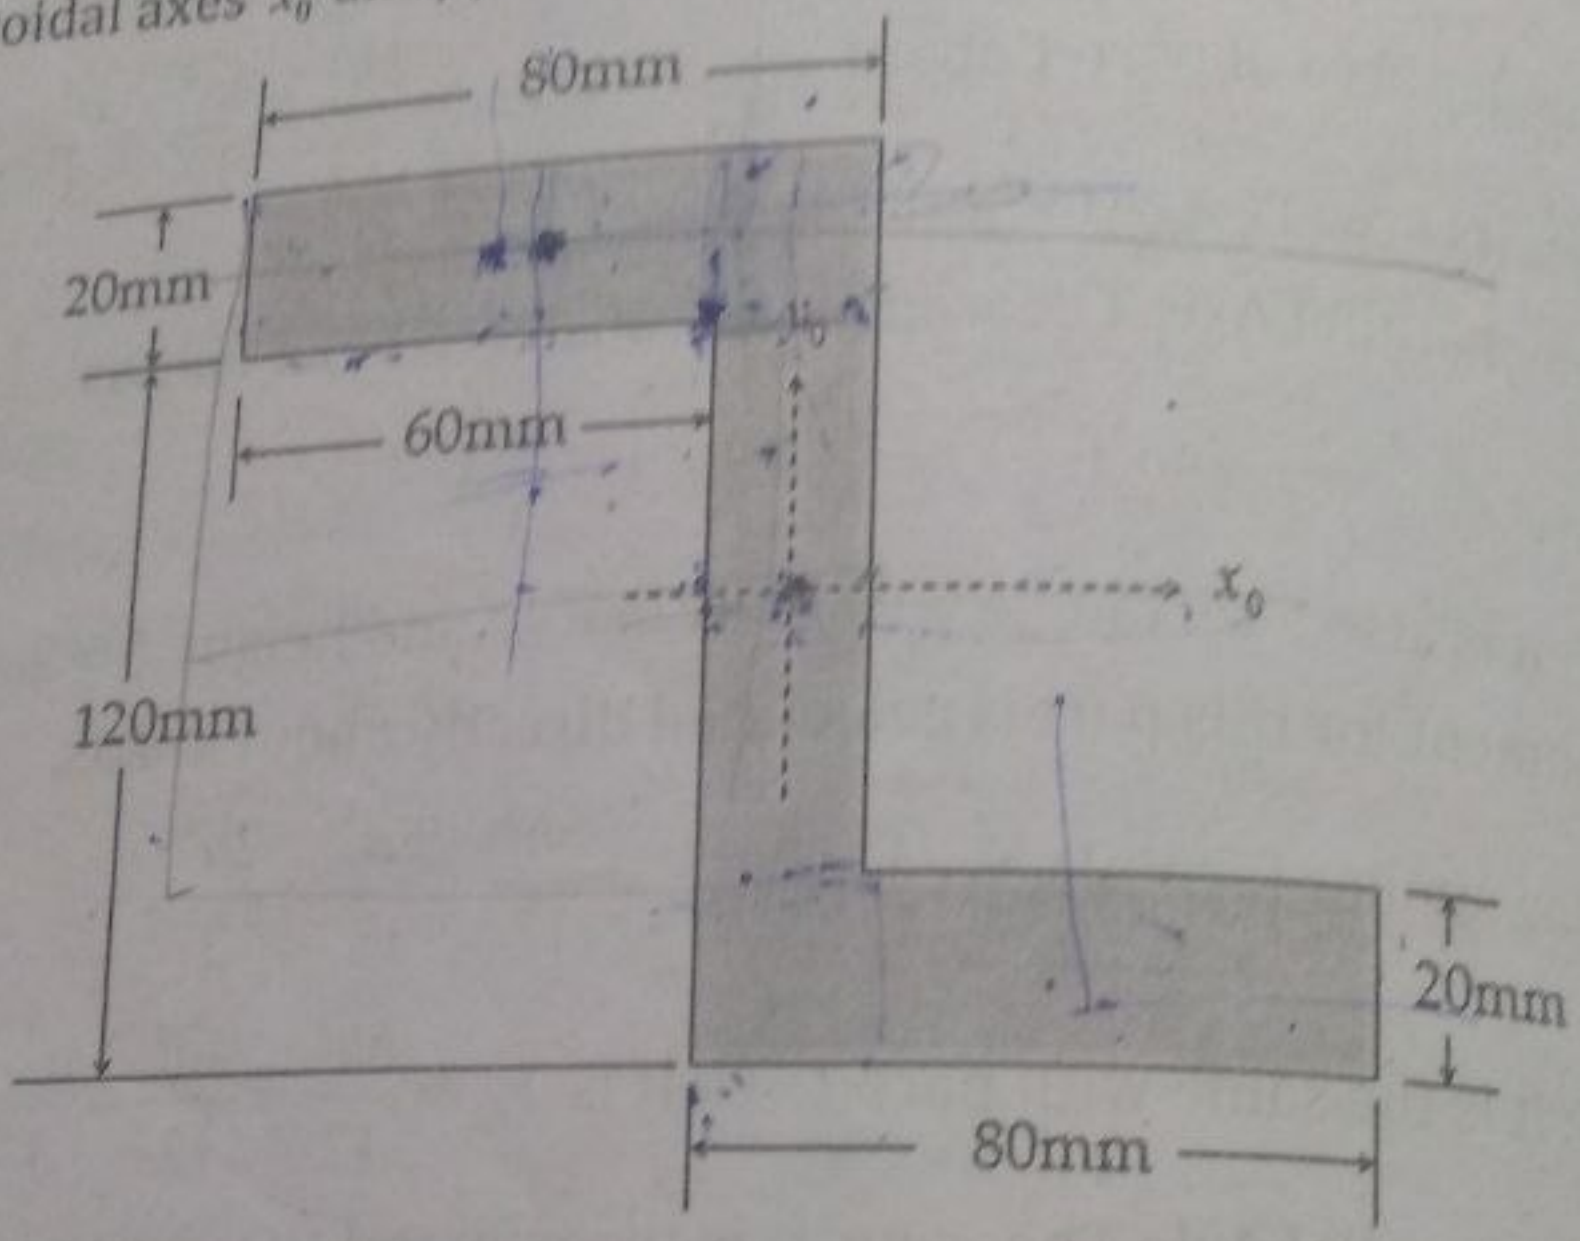

Solution: Let's divide the region into three parts.

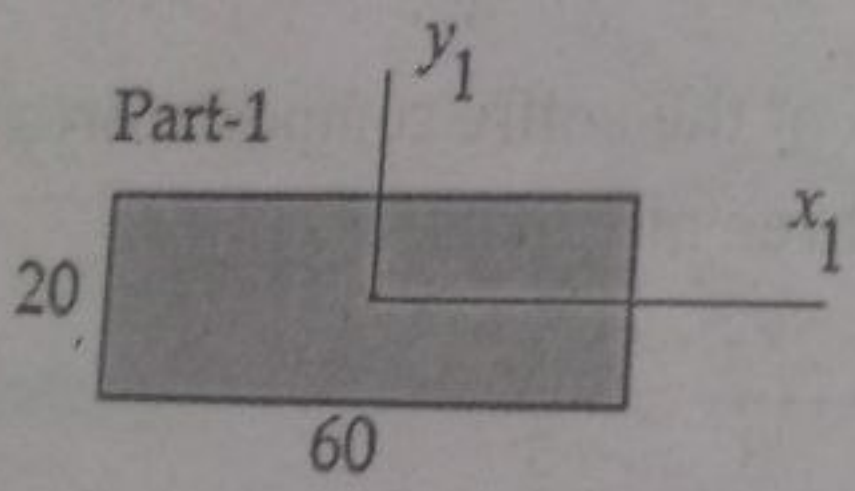

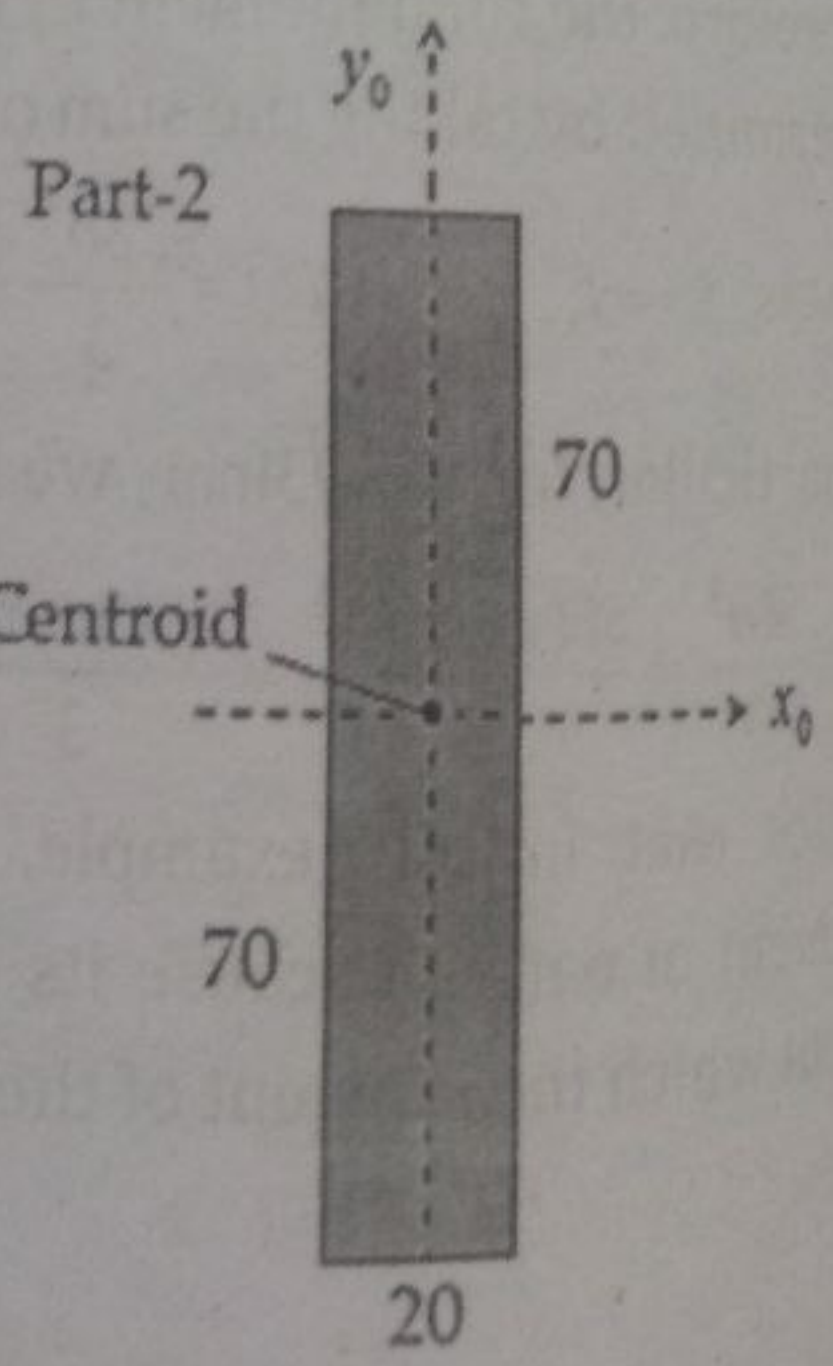

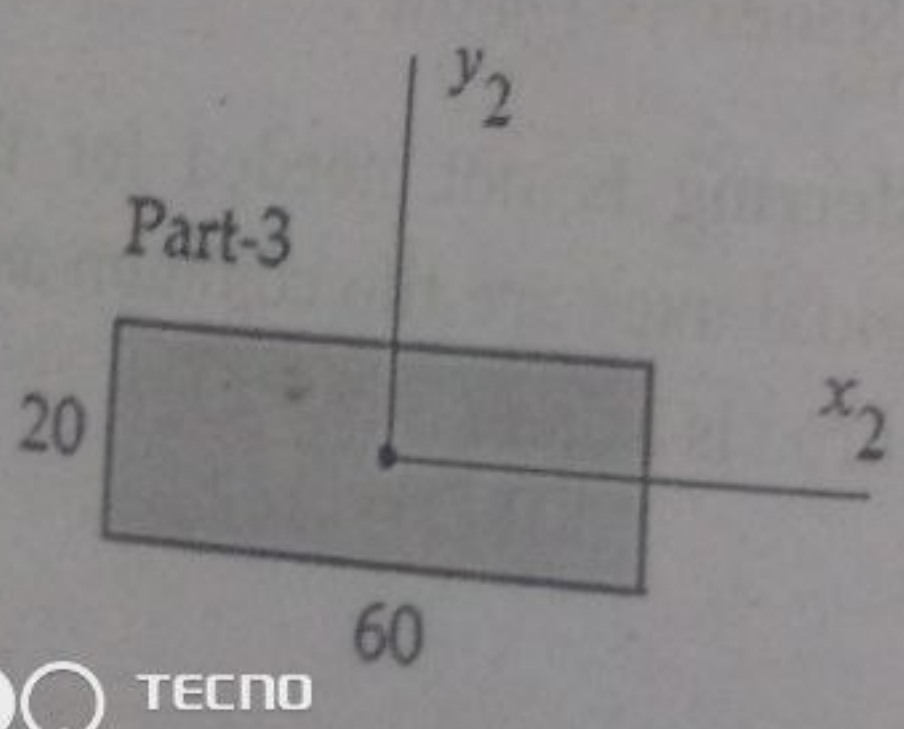

TECNO SPARK

Part-1: It is a rectangle with base $b = 60\text{mm}$ and height $h = 20\text{mm}$. From moment of inertia of a rectangle, using parallel axis theorem, the moments of inertia of part-1 about x_0 and y_0 axes are

i) $I_{1x_0} = \bar{I}_{x_1} + Ad^2 = \dfrac{bh^3}{12} + bhd^2 = \dfrac{(60)(20)^3}{12} + (60)(20)(60)^2$

$= 4\times10^4\,\text{mm}^4 + 432\times10^4\,\text{mm}^4 = 436\times10^4\,\text{mm}^4$

ii) $I_{1y_0} = \bar{I}_{y_1} + Ad^2 = \dfrac{hb^3}{12} + bhd^2 = \dfrac{(20)(60)^3}{12} + (60)(20)(40)^2$

$= 36\times10^4\,\text{mm}^4 + 192\times10^4\,\text{mm}^4 = 228\times10^4\,\text{mm}^4$

Part-2: It is also a rectangle with base $b = 20\text{mm}$ and height $h = 140\text{mm}$. The moment for this part is calculated directly about the centroidal x_0 and y_0 axes.

i) $I_{2x_0} = \dfrac{bh^3}{12} = \dfrac{(20)(140)^3}{12} = 457.\dot{3}\times10^4\,\text{mm}^4$

ii) $I_{2y_0} = \dfrac{hb^3}{12} = \dfrac{(140)(20)^3}{12} = 9.3\times10^4\,\text{mm}^4$

Part-3: It is a rectangle with base $b = 60\text{mm}$ and height $h = 20\text{mm}$. From moment of inertia of a rectangle, using parallel axis theorem, the moments of inertia of part-3 about x_0 and y_0 axes are

i) $I_{3x_0} = \bar{I}_{x_2} + Ad^2 = \dfrac{bh^3}{12} + bhd^2 = \dfrac{(60)(20)^3}{12} + (60)(20)(60)^2$

$= 4\times10^4\,\text{mm}^4 + 432\times10^4\,\text{mm}^4 = 436\times10^4\,\text{mm}^4$

ii) $I_{2y_0} = \bar{I}_{y_2} + Ad^2 = \dfrac{hb^3}{12} + bhd^2 = \dfrac{(20)(60)^3}{12} + (60)(20)(40)^2$

$= 36\times10^4\,\text{mm}^4 + 192\times10^4\,\text{mm}^4 = 228\times10^4\,\text{mm}^4$

Therefore, the total moments of inertia of the entire composite area about the axes x_0 and y_0 is determined by taking the sum of the three moments along the same axis.

TECNO SPARK

That is

$$I_{x_0} = I_{x_0(\text{Total about } x_0\text{-axis})} = I_{1x_0} + I_{2x_0} + I_{3x_0}$$

$$= 436\times10^4\,\text{mm}^4 + 457.3\times10^4\,\text{mm}^4 + 436\times10^4\,\text{mm}^4 = 13.3\times10^6\,\text{mm}^4$$

$$I_{y_0} = I_{y_0(\text{Total about } y_0\text{-axis})} = I_{1y_0} + I_{2y_0} + I_{3y_0}$$


$$= 228\times10^4\,\text{mm}^4 + 9.3\times10^4\,\text{mm}^4 + 228\times10^4\,\text{mm}^4 = 4.65\times10^6\,\text{mm}^4$$

3*. Consider the shaded area below. Then, determine

a) The centroid of the shaded area

b) The rectangular and polar moments of inertia


c) The rectangular and polar radius of gyrations

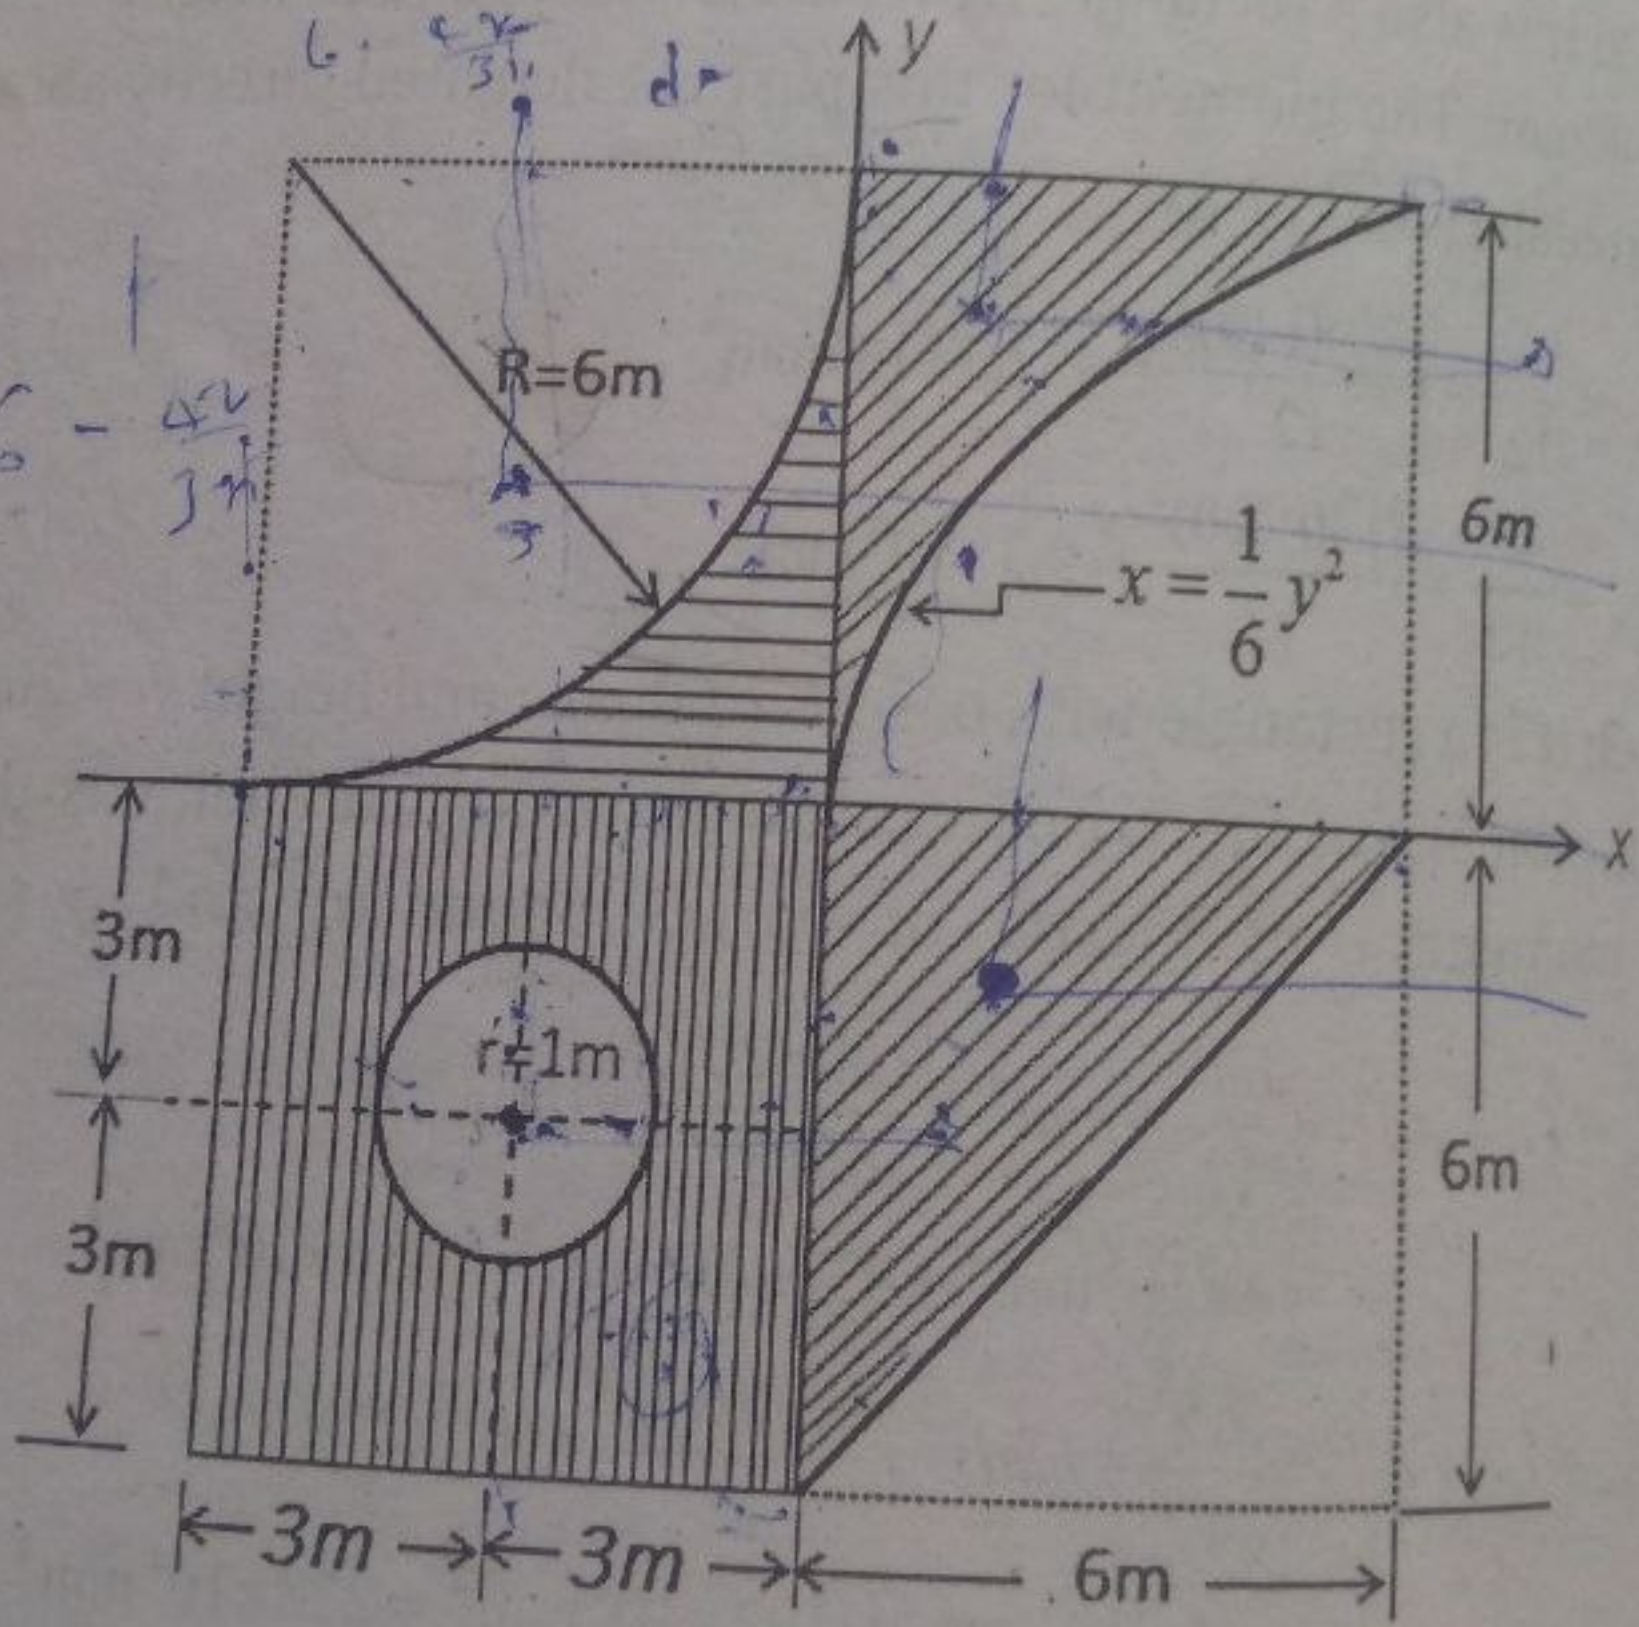

Solution: Let's divide the region into six parts. Then, for each of these pars, compute their areas and the coordinates of their centroids.

Part-1: The parabolic Area in the first quadrant.

Part-1:Parabolic Region

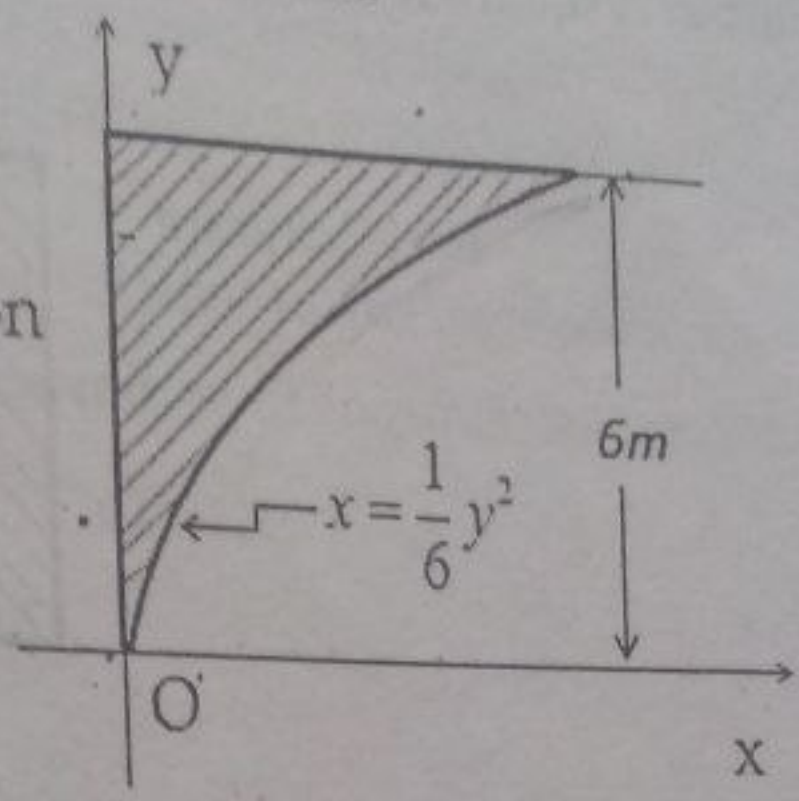

As we see from the diagram, this region is bounded on the right by $x=\frac{1}{6}y^2$ and on the left by $x=0$ on the interval $0\le y\le 6$.

So, let's find the area A of this region.

That is $A=\int_R [f(y)-g(y)dy=\int_0^6 \frac{1}{6}y^2dy=\frac{1}{18}y^3\Big|_{y=0}^{y=6}=\frac{216}{18}=12m^2$

Besides, the coordinates of the centroid are

i) $A\bar{x}=\frac{1}{2}\int_c^d([f(y)]^2-[g(y)]^2)dy \Rightarrow 12\bar{x}=\frac{1}{2}\int_0^6\left(\frac{1}{6}y^2\right)^2dy=\frac{1}{72}\int_0^6 y^4dy$

$$\Rightarrow 12\bar{x}=\frac{y^5}{360}\Big|_{y=0}^{y=6}=\frac{216}{10}$$

$$\Rightarrow 12\bar{x}=\frac{216}{120}=1.8m$$


ii) $A.\bar{y}=\int_c^d[y(f(y)-g(y)]dy=\int_0^6 y\left(\frac{1}{6}y^2\right)dy$

$$\Rightarrow 12\bar{y}=\int_0^6\frac{y^3}{6}dy=\frac{y^4}{24}\Big|_{y=0}^{y=6}=54$$

$$\Rightarrow \bar{y}=4.5m$$

TECNO SPARK
ይህን መጽሃፍ ኮፒ ስለሚያደርግ ወይም ኮፒ ሲሸጥ ባቡ ገዢ በመጠቀም ለሚተላለፉት ሁሉ መረታዉን አንከፍላለን!


Part-2: A square found in the second quadrant as shown.

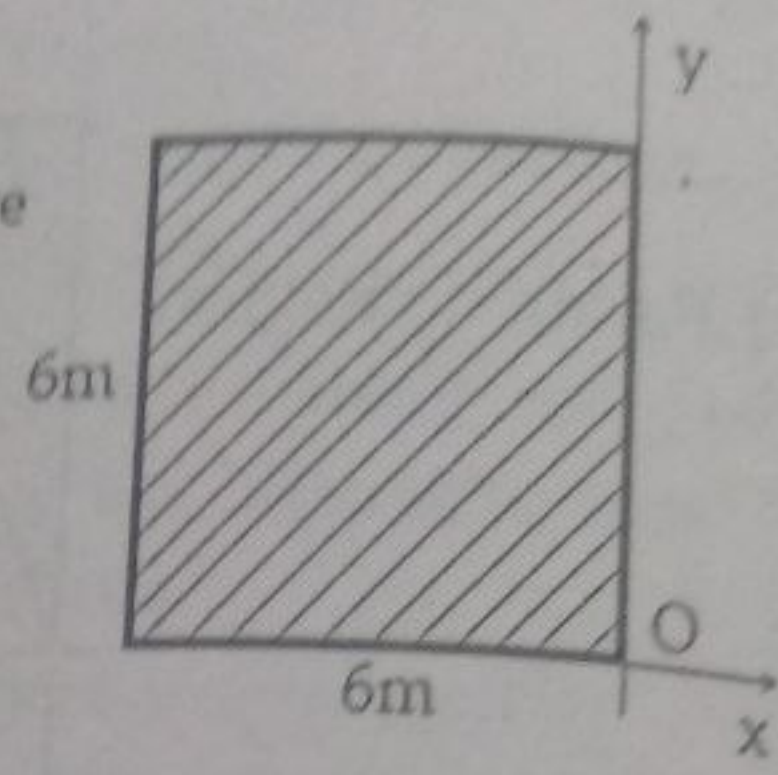

Part-2:Square

The area of this square is $A = 6m \times 6m = 36m^2$. Notice that centroid is the geometric center of a region. Just it is a point whose coordinates can be positive, negative or zero depending on the nature of the region under consideration. In our case, as the square region is found in the second quadrant, we expect the x-coordinate of its centroid to be negative. So, the centroid coordinates are $\bar{x} = -3, \bar{y} = 3$.

Part-3: A quarter circle of radius $R = 6m$ in the second quadrant

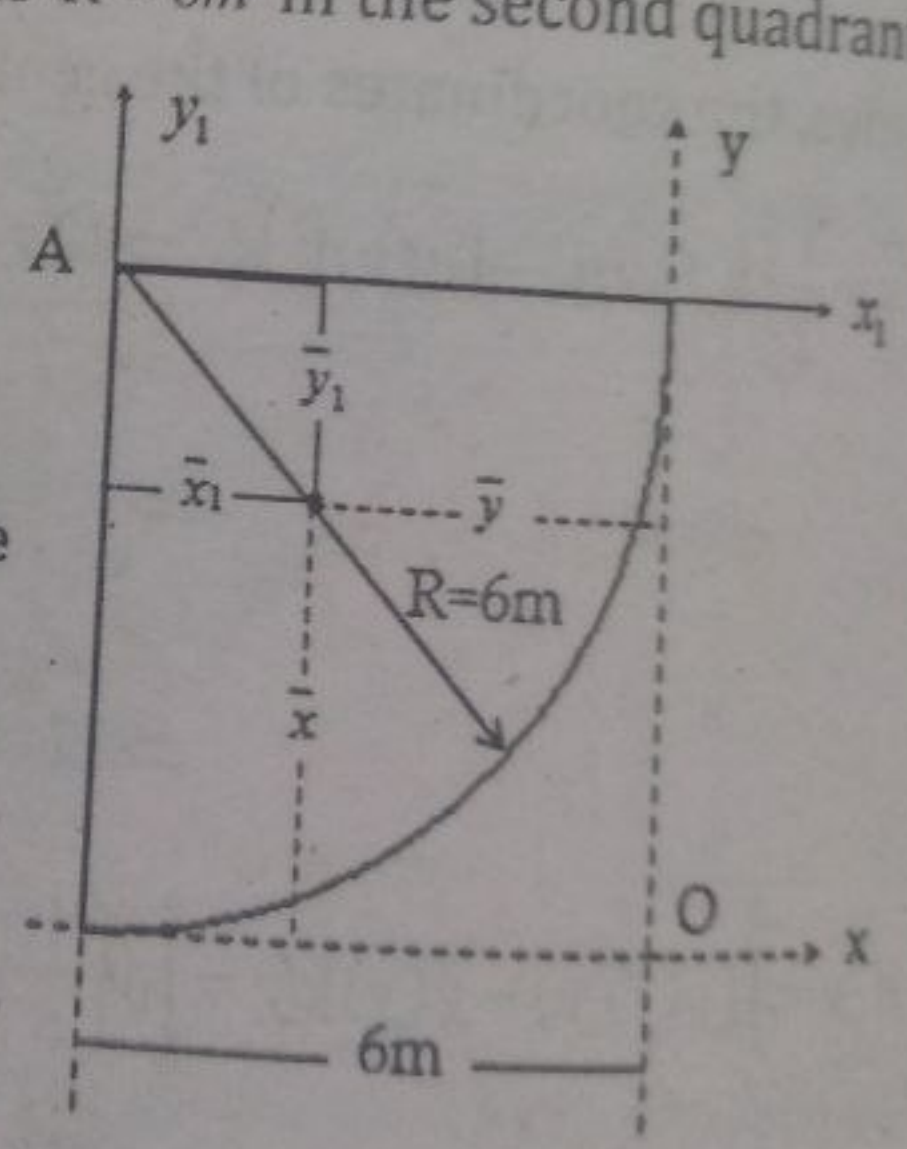

Part-3: An open quarter circle

The area of the quarter circle is $A = \frac{\pi R^2}{4} = \frac{36\pi}{4} = 9\pi m^2$.

TECNO SPARK

Think-Twice: How to get the centroid? It is not obtained directly as we did for the others. Because the cente: of the quarter circle is at A not at O but we need the centroid relative to O not relative to A. Dear users! What shall we do then?

First, determine the coordinates relative to the new axes x_1 and y_1 which are intersecting at A (the center of the quarter circle). But relative to x_1 and y_1, we have


$$\bar{x}_1 = -\frac{4R}{3\pi} = -\frac{24}{3\pi} = -\frac{8}{\pi} = -2.55,$$

$$\bar{y}_1 = \frac{4R}{3\pi} = \frac{24}{3\pi} = \frac{8}{\pi} = 2.55$$

Now, as we see from the diagram, the coordinates of the centroid $C = (\bar{x}, \bar{y})$ relative to the x and y axes are obtained by subtraction.

That is $\begin{cases} \bar{x} = -6 - \bar{x}_1 = -6 - (-2.55) = -6 + 2.55 = -3.45 \\ \bar{y} = 6 - \bar{y}_1 = 6 - 2.55 = 3.45 \end{cases}$

Part-4 A square found in the third quadrant as shown.

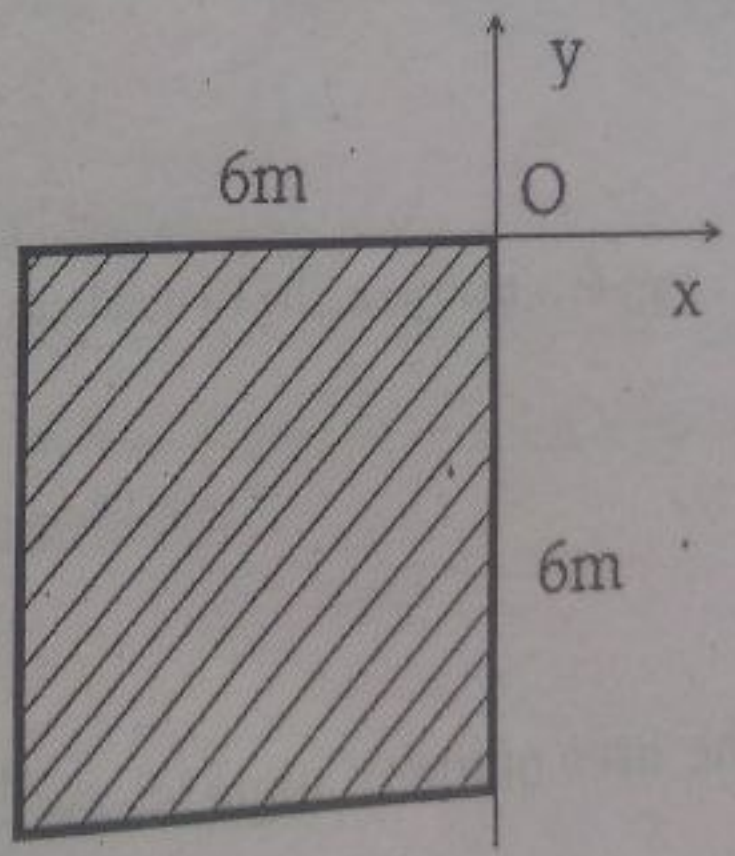


Part-4 Square

Then the area is $A = 36m^2$ and the coordinates of the centroid are $\bar{x} = -3, \bar{y} = -3$. (Why both coordinates are negative?)

TECNO SPARK

Part-5: A circle of radius $r=1m$ in the third quadrant as shown.


The area of the circle is $A=\pi r^2=\pi m^2=\pi m^2$.

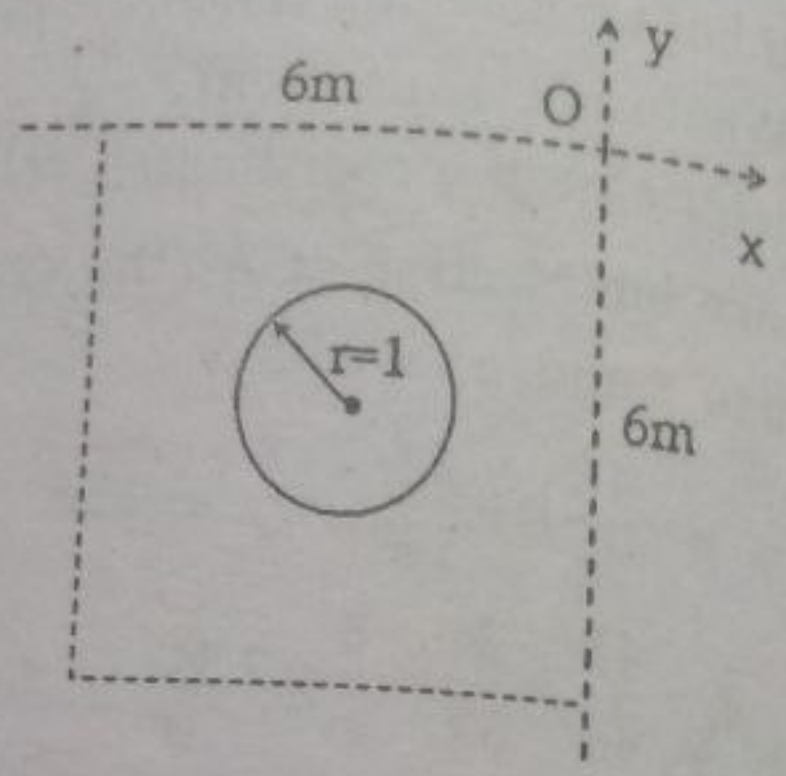

Part-5: An open circle in the third quadrant

Notice: For a full circular region, the centroid is always the center of the circle. Wow! That is great. But the circle is found at the center of a square of side $6m$. So, the center of the circle is $C=(-3,-3)$. Hence, the coordinates of the centroid are $\bar{x}=-3,\ \bar{y}=-3$.

Part-6: A right angle triangle of side $S=6m$ in the fourth quadrant.

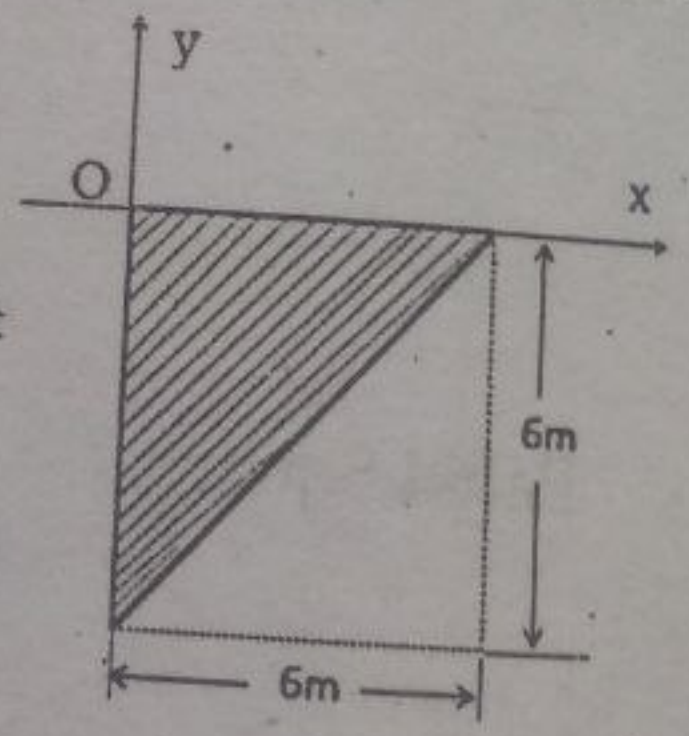

Part-6: A triangle in the IV quadrant

Then, the area of the triangle is $A=\frac{1}{2}(6m)(6m)=18m^2$ and the coordinates of the centroid are $\bar{x}=\frac{b}{3}=\frac{6}{3}=2,\ \bar{y}=-\frac{h}{3}=-\frac{6}{3}=-2$.

ይህን መጽሃፍ ኮፒ ሲያደርግ ወይም ኮፒ ሲሸጥ ባዩ ጊዜ በመጠቀም ለሚተባበሩን ሁሉ ወረታዉን እንከፍለለን!

TECNO SPARK

Now, let's go back to part (a) of the problem.

a) Centroid of the total area. Consider the following summary table.

Parts	Areas(m^2)	$\bar{x}(m)$	$\bar{y}(m)$	$\bar{x}.A\,(m^3)$	$\bar{y}.A(m^3)$
1	12	1.8	4.5	21.6	54
2	36	−3	3	−108	108
3	-9π	−3.45	3.45	97.5	−97.5
4	36	−3	−3	−108	−108
5	$-\pi$	−3	−3	3π	3π
6	18	2	−2	36	−36
Sums	$\sum_{i=1}^{6} A_i = 70.6$			$\sum_{i=1}^{6} A_i.\bar{x}_i = -51.5$	$\sum_{i=1}^{6} A_i.\bar{y}_i = -70.1$

Therefore, the coordinates of the centroids are

$$\bar{X} = \frac{\sum_{i=1}^{n} A_i.\bar{x}_i}{\sum_{i=1}^{n} A_i} = \frac{-51.5}{70.6} = -0.729\text{m}, \quad \bar{Y} = \frac{\sum_{i=1}^{n} A_i.\bar{y}_i}{\sum_{i=1}^{n} A_i} = \frac{-70.1}{70.6} = -0.993\text{m}$$

b) The rectangular and polar moments of inertia.

To find the moment of inertia of the total area, first determine the moments of inertia of each of the six parts. Please give attention how the inertia of each part is calculated.

Part-1: The parabolic curve

$$I_x = \int_R y^2 dA = \int_R y^2 x dy = \int_0^6 y^2 . \frac{1}{6} y^2 dy = \frac{1}{6}\int_0^6 y^4 dy = \frac{y^5}{30}\Big|_{y=0}^{y=6} = 259.2$$

$$I_y = \frac{1}{3}\int_R x^2 dA = \frac{1}{3}\int_R x^2 . x dy = \frac{1}{3}\int_0^6 \frac{y^6}{216} dy = \frac{y^7}{4536}\Big|_{y=0}^{y=6} = 61.7$$

TECNO SPARK

Part-2: For the square, about its centroid,

$$I_{\bar{x}} = I_{\bar{y}} = \frac{bh^3}{12} = \frac{6(6^3)}{12} = 108$$

Part-3: For the quarter circle about its centroid,

$$I_{\bar{x}} = I_{\bar{y}} = R^4\left(\frac{\pi}{16} - \frac{4}{9\pi}\right) = 1296\left(\frac{\pi}{16} - \frac{4}{9\pi}\right) = 70.6$$

Part-4: For the square, about its centroid,

$$I_{\bar{x}} = I_{\bar{y}} = \frac{bh^3}{12} = \frac{6(6^3)}{12} = 108$$

Part-5: For the small open circle, about its centroid,

$$I_{\bar{x}} = I_{\bar{y}} = \frac{\pi r^4}{4} = \frac{\pi}{4} = 0.785$$

Part-6: For the triangle, about its centroid,

$$I_{\bar{x}} = I_{\bar{y}} = \frac{bh^3}{36} = \frac{6(6^3)}{36} = 36$$

Now, let's construct the following summary table.

Parts	Areas	d_x	d_y	$A.d_x^2$	$A.d_y^2$	$\bar{I}x$	$\bar{I}y$
1	12	1.8	4.5	-	-	-	-
2	36	−3	3	324	324	108	108
3	-9π	−3.45	3.45	−336.4	−336.4	−70.6	−70.6
4	36	−3	−3	324	324	108	108
5	$-\pi$	−3	−3	-9π	-9π	−0.785	−0.785
6	18	2	−2	72	72	36	36
Sums	70.6			355.34	355.34	180.62	180.62

Therefore, for the total area, by applying Parallel axes Theorem, we have the following results.

i) Rectangular moments of inertia;

$$I_x = \sum \bar{I}x + \sum Ad_x^2 + I_{x(\text{The parabola})} = 355.34 + 180.62 + 259.2 = 795.16$$

$$I_y = \sum \bar{I}y + \sum Ad_y^2 + I_{y(\text{The parabola})} = 355.34 + 180.62 + 61.7 = 597.66$$


ii) Polar moment of inertia; $I_z = I_x + I_y = 795.16 + 597.66 = 1392.82$

c) i) Rectangular radius of gyration,

$$k_x = \sqrt{\frac{I_x}{A}} = \sqrt{\frac{795.16}{70.6}} = 3.356,\ k_y = \sqrt{\frac{I_y}{A}} = \sqrt{\frac{597.66}{70.6}} = 2.91$$

c) ii) Polar radius of gyration, $k_z = \sqrt{\frac{I_z}{A}} = \sqrt{\frac{1392.82}{70.6}} = 4.44$

4. For the shaded area, determine the moment of inertia about x-axis

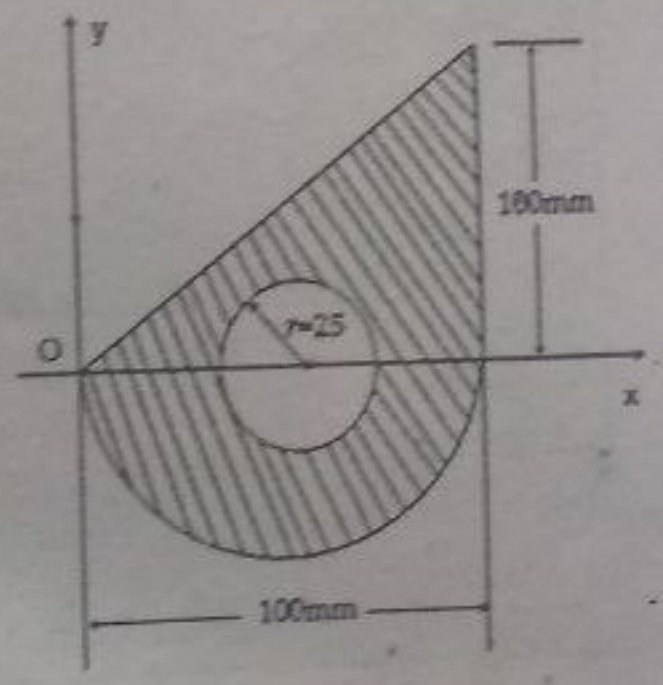

Solution: Let's divide the region into three parts.

Part-1: A triangle of side $b = 300mm$ and height $h = 100mm$.

As we see from the diagram of the problem, the base of the triangle is along x-axis. But we know that for a triangle, the moment of inertia about its base is given by $I_{x_1} = \frac{bh^3}{12} = \frac{(100)(100)^3}{12} = 8.33 \times 10^6$.

Part-2: The semi circle of radius $R = 50mm$ below the x-axis.

As we see from the diagram, the diameter of the semicircle is along x-axis. But we know that for a semicircle, the moment of inertia about its diameter is given by $I_{x_2} = \pi R^4 / 8 = \pi(50)^4 / 8 = 2.45 \times 10^6$.

TECNO SPARK
ይህን መጽሃፍ ኮፒ ሊያደርግ ወይም ኮፒ ሲሸጥ ባቡ ጊዜ በመጠቀም ለሚተባበሩን ሁሉ መረታዉን አንከፍላለን!


Part-3: An open circle of radius $r = 25mm$. For a circle, the moment of inertia is $I_{x_3} = 0.31\times10^6$. Therefore, the moment of inertia of the total area is the sum of the moments of the individual parts by assuming the moment of inertia of the open part (the hole) as negative.

That is $I_x = I_{x_1} + I_{x_2} - I_{x_3} = 10.47\times10^6$

5*. Consider the shaded area below. Then, determine

a) The moment of inertia of the total area about the x-axis

b) Give the moment of the total area about the horizontal centroidal axis of the upper rectangle

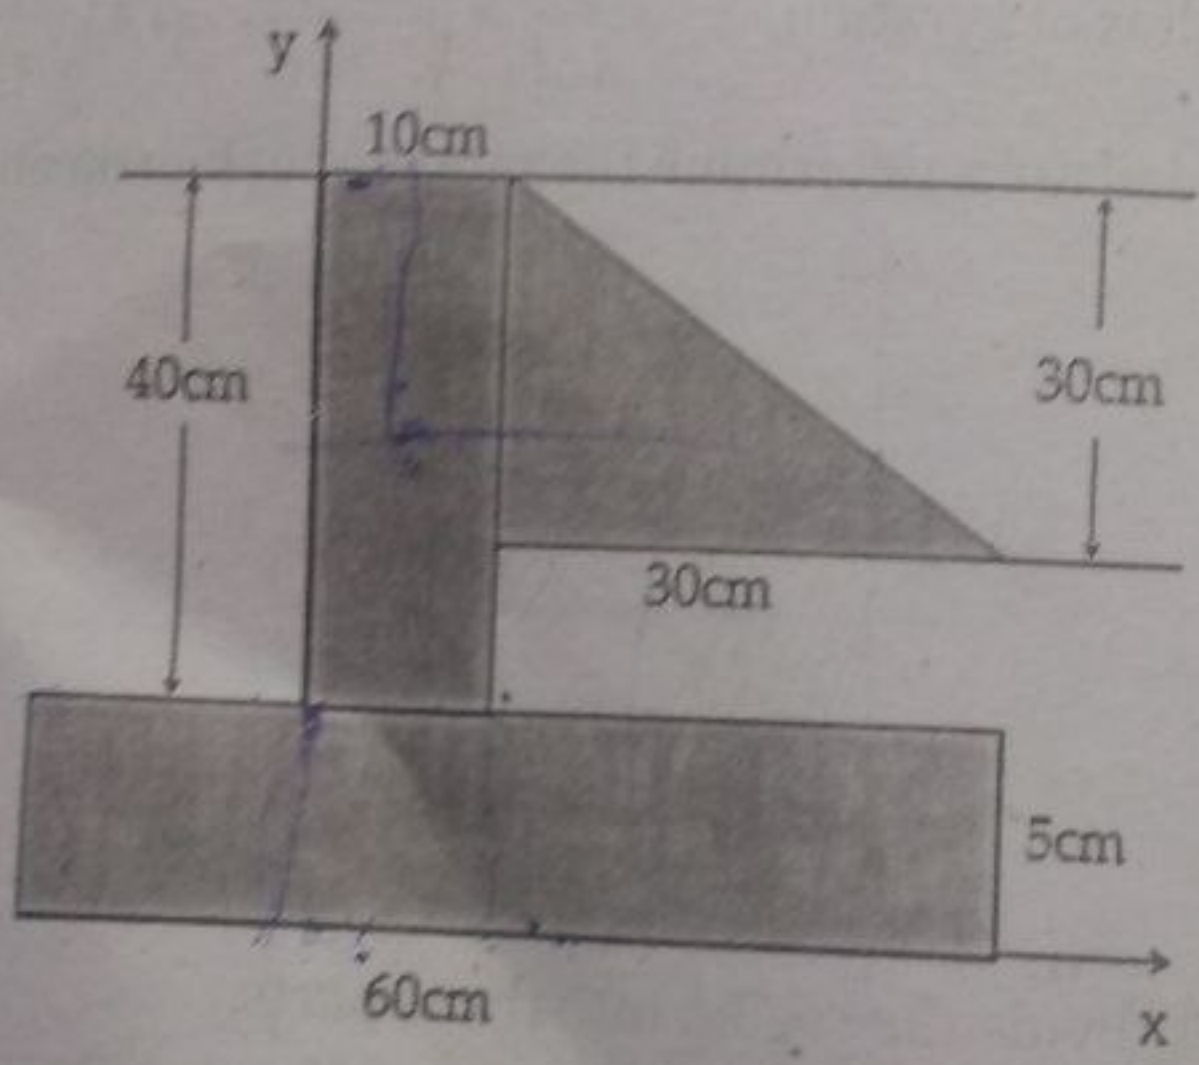

Solution: Let's divide the region into three parts.

Step-1: Determine the moments of each part.

Part-1: The lower rectangle with base $b=60$ and height $h=5$ .Since tha base of this rectangle is along the x-axis, its moment of inertia is directly computed withoit a need of transferring.

Then, its area is $A_1 = 60\times5 = 300$. Its moment of inertia about the base (x-axis) is simply $I_x = \frac{bh^3}{3} = \frac{60(5^3)}{3} = 2500$.

Part-2: The upper rectangle with base $b=10$ and height $h=40$. Then, its area is $A_2=10\times40=400$. Its moment of inertia about its centroid is $\bar{I}_{x_2}=\dfrac{bh^3}{12}=\dfrac{10(40^3)}{12}=5.33\times10^4$.

Part-3: The triangle of base $b=30$ and height $h=30$.

Then, its area is $A_3=\dfrac{1}{2}(30)(30)=450$. Besides, the moment about its centroid is given by $\bar{I}_{x_3}=\dfrac{bh^3}{36}=\dfrac{30(30)^3}{36}=22{,}500$

Step-2: Check if transfer is needed (if so apply PAT). In many situations of moment computation for composite area, transferring into a common axis is encountered because the centroidal axis need not be the same for all parts. In our case, we are interested the total moment about x-axis. But from the above three parts, only the moment of part-1 is calculated about x-axis. So, transferring is needed for part-2 and part-3. For part-1, $I_1=I_x=\dfrac{bh^3}{3}=\dfrac{60(5^3)}{3}=2500$.

For part-2, $I_2=\bar{I}_{x_2}+A_2d^2$ where is d is the distance from the centroid to the x-axis. What is the value of d? Look $d=5+\dfrac{h}{2}=25$. So,

$I_2=\bar{I}_{x_2}+A_2d^2=5.33\times10^4+(400)(25)^2=30.33\times10^4$.

For part-3, $I_3=\bar{I}_{x_3}+A_3d^2$ where d is the distance from the centroid of the triangle to the x-axis. What is the value of d? Look $d=5+10+\dfrac{h}{3}=25$. So, $I_3=\bar{I}_{x_3}+A_3d^2=22{,}500+(450)(25)^2=30.4\times10^4$.

Therefore, the total moment of inertia about the common axis (x-axis) is $I_x=I_1+I_2+I_3=2500+30.33\times10^4+30.4\times10^4=6.1\times10^5$

TECNO SPARK


6. Consider the shaded area below. Then, determine

a) The centroid of the shaded area

b) Polar moments of inertia and radius of gyration about x and y axes

c) The moments of inertia about its centroidal axes

d) The moments of inertia about the axes $x_1 = -0.375$ and $y_1 = -9$

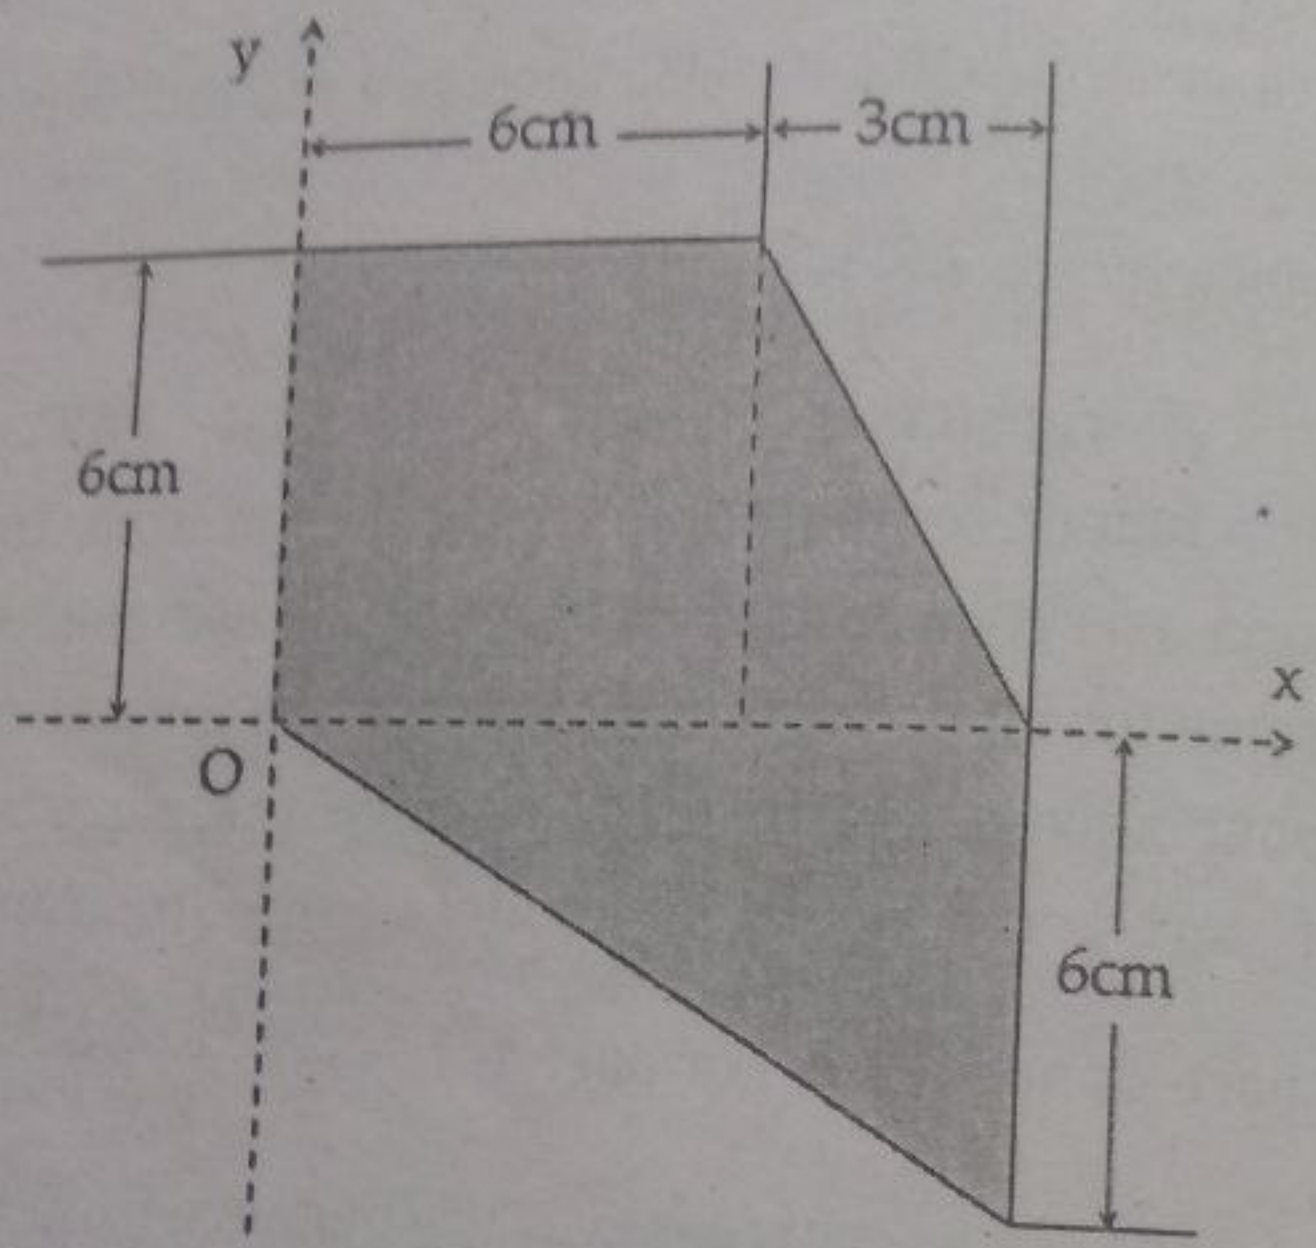

Solution: Let's divide the region into three parts.

Step-1: Determine the centroids of each part as well as the moments of each part about its centridal axes.

Part-1: The rectangle with base $b = 6$ and height $h = 6$.

So, the coordinates of its centroid are $\bar{x}_1 = \frac{b}{2} = 3\text{cm}$, $\bar{y}_1 = \frac{h}{2} = 3\text{cm}$.

Besides, its area is $A_1 = 6 \times 6 = 36$. Its moment of inertia about its centoidal axes are $I_{\bar{x}_1} = \frac{bh^3}{12} = \frac{6(6^3)}{12} = 108$, $I_{\bar{y}_1} = \frac{hb^3}{12} = \frac{6(6^3)}{12} = 108$.

ይህን መጽሃፍ ኮፒ ሊያደርግ ወይም ኮፒ ሲሸጥ ባዩ ጊዜ በመጠቆም ለሚተባበሩን ሁሉ ወረታዉን እንከፍላለን!

TECNO SPARK

Part-2: The upper triangle with base $b=3$ and height $h=6$.

So, the coordinates of its centroid are $\bar{x}_2=6+\frac{b}{3}=7\text{cm}, \bar{y}_2=\frac{h}{3}=2\text{cm}$.

Besides, its area is $A_2=\frac{1}{2}(3)(6)=9$. Its moment of inertia about its centroid is $I_{x_2}=\frac{bh^3}{36}=\frac{3(6)^3}{36}=18, I_{y_2}=\frac{hb^3}{36}=\frac{6(3)^3}{36}=4.5$.

Part-3: The lower triangle with base $b=9$ and height $h=6$.

So, the coordinates of its centroid are $\bar{x}_3=\frac{2b}{3}=6\text{cm}, \bar{y}_3=-\frac{h}{3}=-2\text{cm}$.

Then, its area is $A_3=\frac{1}{2}(9)(6)=27$. Its moment of inertia about its centroid is $I_{x_3}=\frac{bh^3}{36}=\frac{9(6)^3}{36}=54, I_{y_3}=\frac{hb^3}{36}=\frac{6(9)^3}{36}=121.5$.

a) Centroid of total area: The coordinates of the centroid of the total area is given by

i) $\bar{X}=\frac{A_1\bar{x}_1+A_2\bar{x}_2+A_3\bar{x}_3}{A_1+A_2+A_3}=\frac{(36)(3)+(9)(7)+(27)(6)}{36+9+27}=4.625\text{cm}$

ii) $\bar{Y}=\frac{A_1\bar{y}_1+A_2\bar{y}_2+A_3\bar{y}_3}{A_1+A_2+A_3}=\frac{(36)(3)+(9)(2)+(27)(-2)}{36+9+27}=1\text{cm}$

b) Moments of inertia

Step-2: Transfer each moment about x-axis using PAT.

Parts	Areas (A)	d_y	d_x	$\bar{I}x+Ad_x^2$	$\bar{I}y+Ad_y^2$
				432	432
1	36	3	3	54	445.5
2	9	7	2	162	1093.5
3	27	6	−2	648	1971
Sums	72				

Therefore, the total moment of inertia is given by

$$I_x = \sum I_{x_i} + \sum A_i d_y^2 = 648,\ I_y = \sum I_{y_i} + \sum A_i d_y^2 = 1971$$

The polar moment of inertia is given by $I_z = I_x + I_y = 648 + 1971 = 2619$

The polar radius of gyration is $k_z = \sqrt{\frac{I_z}{A}} = \sqrt{\frac{2619}{72}} = 6.03$

c) We are asked the moment of inertia about the centroidal axes. But from part (a), the centroidal axe are $x_0 = 4.625$ and $y_0 = 1$. Besides from part (b), we have $I_x = 648$, $I_y = 1971$. So, by Parallel Axes Theorem, $I_x = I_{x_0} + Ad_x^2$, $I_y = I_{y_0} + Ad_y^2$. Now, the problem is what are the distances d_x and d_y ? The distance d_x is the distance between the x-axis and the horizontal centroidal axis $y_0 = 1$ of the area. It is $d_x = 1$. Similarly, the distance d_y is the distance between the y-axis and the vertical centroidal axis $x_0 = 4.625$ of the area. It is $d_y = 4.625$. Hence,

$$I_x = I_{x_0} + Ad_x^2 \Rightarrow I_{x_0} = I_x - Ad_x^2 = 648 - 72 = 576$$

$$I_y = I_{y_0} + Ad_y^2 \Rightarrow I_{y_0} = I_y - Ad_y^2 = 1971 - 1540 = 431$$

d) We are asked the moment of inertia about the non-centroidal axes $x_1 = -0.375$ and $y_1 = -9$. But from part (c), the moments about the centroidal axes are found to be $I_{x_0} = 576$, $I_{y_0} = 431$. Then, by PAT,

$$I_{x_1} = I_{x_0} + Ad_x^2 = 576 + 72(10)^2 = 7806$$


$$I_{y_1} = I_{y_0} + Ad_y^2 = 431 + 72(5)^2 = 2231$$

6°. Consider the shaded area below. Then, determine

a) The centroid of the shaded area


b) The rectangular and polar moments of inertia

c) The rectangular and polar radius of gyrations

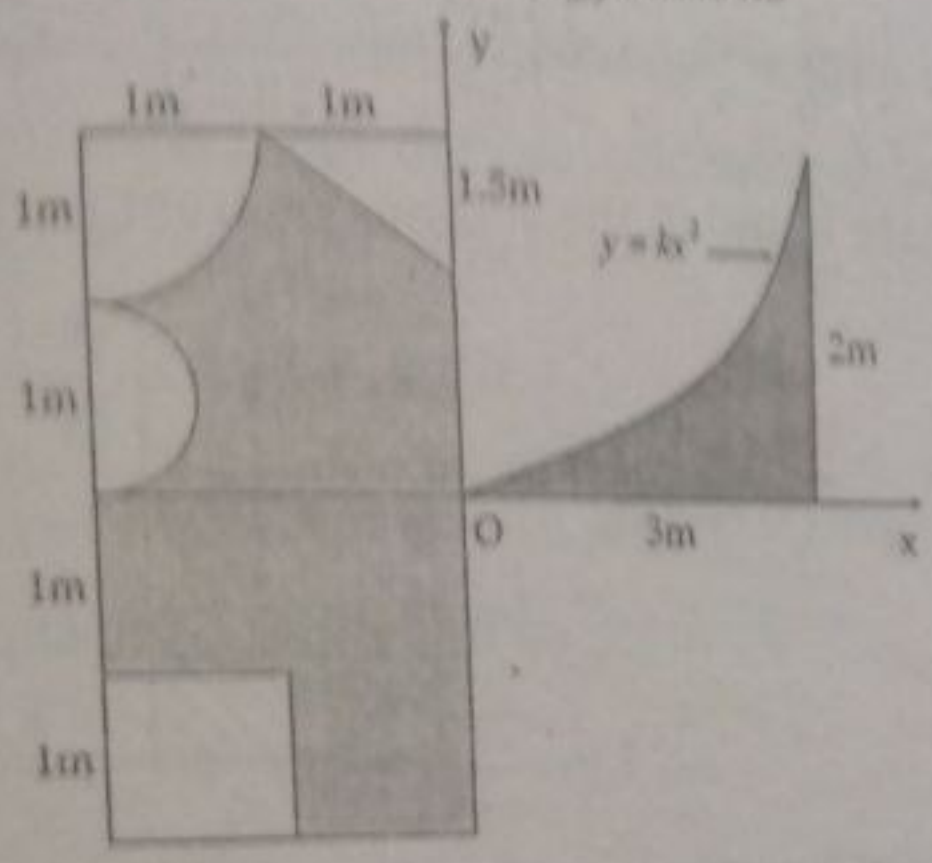

Solution: Let's divide the region into seven parts.

Part-1: The parabolic Area in the first quadrant.

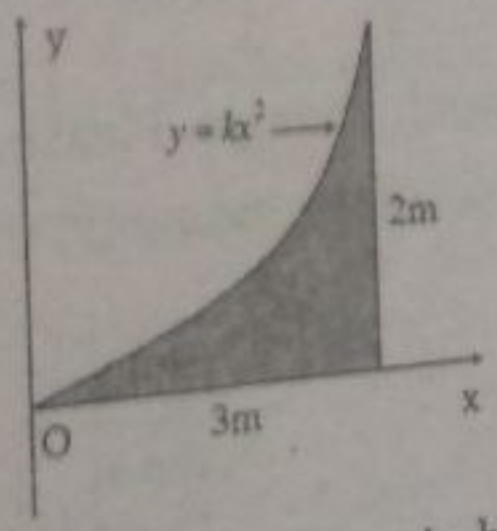

As we see from the diagram, this region is bounded on the left by $y=kx^2$ and on the interval $0\le x\le 3$ where the constant k is to be determined. On the curve when $x=3$, w have $y=2$.

So, $y=kx^2 \Rightarrow k(3)^2=2 \Rightarrow 9k=2 \Rightarrow k=2/9$.

Thus, the area bounded by the curve is obtained using integration as follow: $A=\int_0^3 \frac{2}{9}x^2\,dy=\frac{2}{27}x^3\Big|_{x=0}^{x=3}=2m^2$.


Now, obtain the moment of inertia of the area. That is

$$I_y = \int_R x^2 dA = \int_R x^2 y dx = \int_0^3 x^2 \left(\frac{2}{9}x^3\right) dx = \frac{2}{9}\int_0^3 x^5 dx = \frac{2}{45}x^6\Big|_{x=0}^{x=3} = \frac{54}{5} = 10.8$$

$$I_x = \int_R \frac{1}{3}y^3 dx = \frac{1}{3}\int_R \left(\frac{2}{9}x^3\right)^3 dx = \frac{1}{3}\int_0^3 \frac{8x^9}{9^3} dx = \frac{8x^7}{21(9^3)}\Big|_{x=0}^{x=3} = \frac{8}{7} = 1.143$$

Part-2: A square found in the second quadrant as shown.,


Part-2:Square

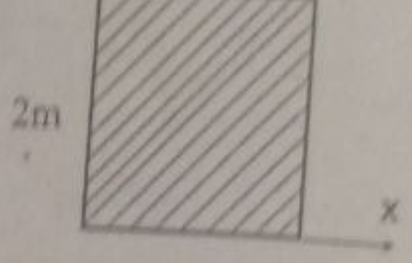

The area of this square is $A = 2m \times 2m = 4m^2$. Besides, for the square, its moments about its base (x-axis or y-axis) are,

$$I_x = I_y = \frac{bh^3}{3} = \frac{2(2^3)}{3} = \frac{16}{3} = 5.333$$

Part-3: The upper open triangle. Please observe that this part has a trick in the calculation of the moments.

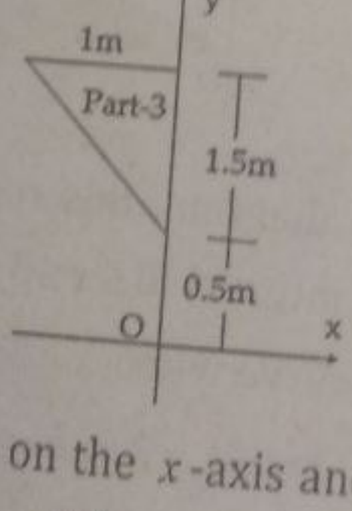

For a triangle if the base lies on the x-axis and the height lies along the y-axis, the moment are $I_x = \frac{bh^3}{12}, I_y = \frac{hb^3}{12}$.

In this example, one side of the triangle lies along the y-axis but none of the sides coincide with the x-axis. This means the moment of inertia about the y-axis is $I_y = \frac{bh^3}{12} = \frac{(0.5)(1^3)}{12} = \frac{1.5}{12} = \frac{1}{8} = 0.125$.

So, how do we get I_x? Construct a new x_1-axis along the upper base as shown and calculate about the centroid with respect to the new axes. Finally, transfer the result into the x-axis. For the triangle, about its centroid, $I_{x_1} = \frac{bh^3}{36} = \frac{(1)(0.5)^3}{36} = 0.0104$.

Then, by PAT, $I_x = I_{x_1} + Ad^2 = 0.0104 + (0.75)(0.5)^2 = 1.782$.

Part-4: For the quarter circle about its centroid,

$$I_{x_1} = I_{y_1} = \frac{\pi R^4}{16} = \frac{\pi}{16} = 0.1963$$

Then, by PAT,

$$\begin{cases} I_{x_1} = I_{\bar{x}_1} + Ad^2 \Rightarrow I_{\bar{x}_1} = I_{x_1} - Ad^2 = 0.1963 - \frac{\pi}{4}\left(\frac{4}{3\pi}\right)^2 = 0.0548 \\ I_{y_1} = I_{\bar{y}_1} + Ad^2 \Rightarrow I_{\bar{y}_1} = I_{y_1} - Ad^2 = 0.1963 - \frac{\pi}{4}\left(\frac{4}{3\pi}\right)^2 = 0.0548 \end{cases}$$

Using PAT for the second time, we transfer into the x and y axes.

$$\begin{cases} I_x = I_{\bar{x}_1} + Ad^2 = 0.0548 + \frac{\pi}{4}\left(2 - \frac{4}{3\pi}\right)^2 = 0.0548 + 1.95 = 2.005 \\ I_y = I_{\bar{y}_1} + Ad^2 = 0.0548 + \frac{\pi}{4}\left(2 - \frac{4}{3\pi}\right)^2 = 0.0548 + 1.95 = 2.005 \end{cases}$$

Part-5: A semicircle of radius $R = 0.5$. For a semicircle, about its centroid, the moments are $I_{x_1} = I_{y_1} = \frac{\pi R^4}{8} = \frac{\pi(0.5)^4}{8} = 0.0245$

Besides, the area of the semicircle is $A = \frac{\pi R^2}{2} = \frac{\pi(0.5)^2}{2} = \frac{\pi}{8} = 0.393$.


Then, by PAT, $I_x = I_{x_1} + Ad^2 = 0.0245 + (0.393)(0.5)^2 = 0.1228$.

Again, apply PAT twice, to get I_y.

$$I_{y1} = I_{\bar{y}} + Ad^2 \Rightarrow I_{\bar{y}} = I_{y1} - Ad^2 = 0.0245 - (0.393)(\frac{2}{3\pi})^2 = 0.0068$$

Thus, by PAT, $I_y = I_{\bar{y}1} + Ad^2 = 0.0068 + (0.393)(2 - \frac{2}{3\pi})^2 = 1.2629$.


Part-6: A square found in the third quadrant as shown.

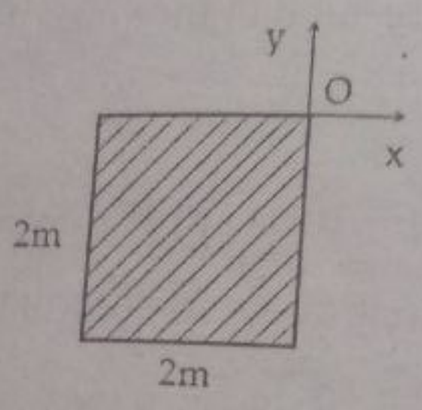

The area of this square is $A = 2m \times 2m = 4m^2$. Besides, for the square, its moments about its base (x-axis or y-axis) are,

$$I_x = I_y = \frac{bh^3}{3} = \frac{2(2^3)}{3} = \frac{16}{3} = 5.333$$

Part-7: An open square found in the third quadrant as shown.

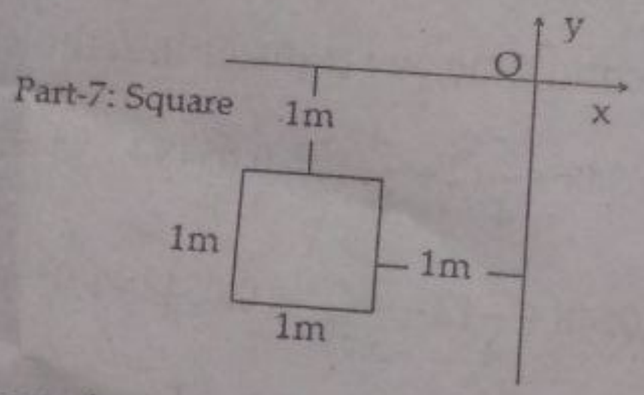

The area of this square is $A = 1m \times m = 1m^2$. Besides, for the square, its moments with respect to x_1 and y_1 axes are

$$I_{x1} = I_{y1} = \frac{bh^3}{3} = \frac{1(1^3)}{3} = \frac{1}{3}.$$

Then, by PAT about the centroids,

$$\begin{cases} I_{x1} = I_{\bar{x}1} + Ad^2 \Rightarrow I_{\bar{x}1} = I_{x1} - Ad^2 = \frac{1}{3} - (0.5)^2 = 0.083 \\ I_{y1} = I_{\bar{y}1} + Ad^2 \Rightarrow I_{\bar{y}1} = I_{y1} - Ad^2 = \frac{1}{3} - (0.5)^2 = 0.083 \end{cases}$$

Then, using PAT for the second time,

$$I_x = I_{\bar{x}1} + Ad^2 = 0.083 + (1)(1.5)^2) = 2.33$$

$$I_y = I_{\bar{y}1} + Ad^2 = 0.083 + (1)(1.5)^2) = 2.33$$

For the total area: The moment of inertia for the total are is the algebraic sum of the moments of inertia of the seven parts by considering the open parts as negative. That is

i) Rectangular moments of inertia;

$$I_x = I_1 + I_2 - I_3 - I_4 - I_5 - I_6 + I_7$$

$$= 1.143 + 5.333 - 1.782 - 2.005 - 0.1228 + 5.333 + 2.33 = 9.124$$

$$I_y = I_1 + I_2 - I_3 - I_4 - I_5 - I_6 + I_7$$

$$= 10.8 + 5.333 - 0.125 - 2.005 - 1.2629 + 5.333 + 2.33 = 20.4$$

ii) Polar moment of inertia; $I_z = I_x + I_y = 9.124 + 20.4 = 29.524$

c) Rectangular and polar radius of gyrations;


i) Rectangular radius of gyration,

$$k_x = \sqrt{\frac{I_x}{A}} = \sqrt{\frac{9.124}{7.07}} = 1.14, \quad k_y = \sqrt{\frac{I_y}{A}} = \sqrt{\frac{20.4}{7.07}} = 1.7$$

ii) Polar radius of gyration, $k_z = \sqrt{\frac{I_z}{A}} = \sqrt{\frac{29.524}{7.07}} = 2.04$


Review Problems on Chapter-5


1. Consider the shaded area below. Then, determine
a) The centroid of the shaded area
b) The rectangular and polar moments of inertia
c) The rectangular and polar radius of gyrations

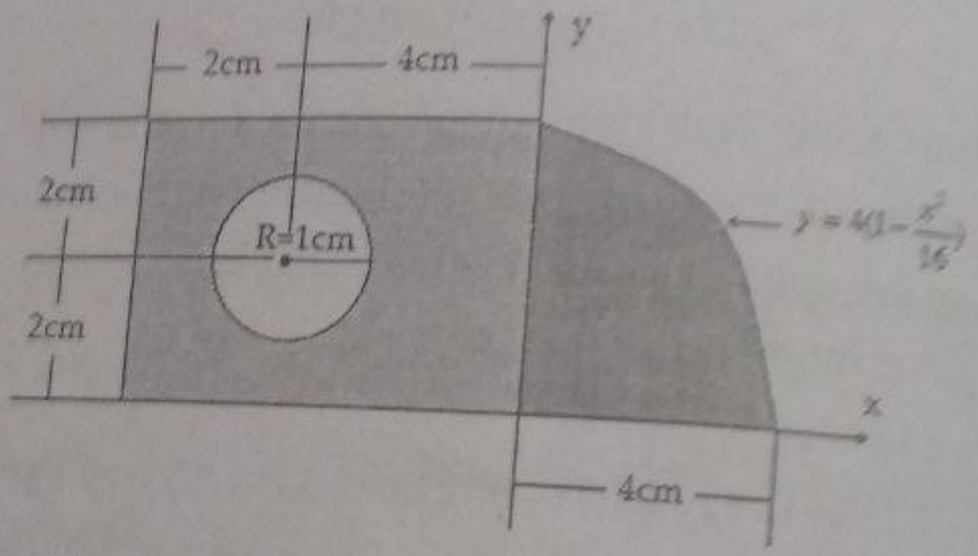



Answer: $I_x = 153.7,\ I_y = 271.1$

2*. Consider the shaded area below. Then, determine
a) The centroid of the shaded area
b) The rectangular and polar moments of inertia
c) The rectangular and polar radius of gyrations

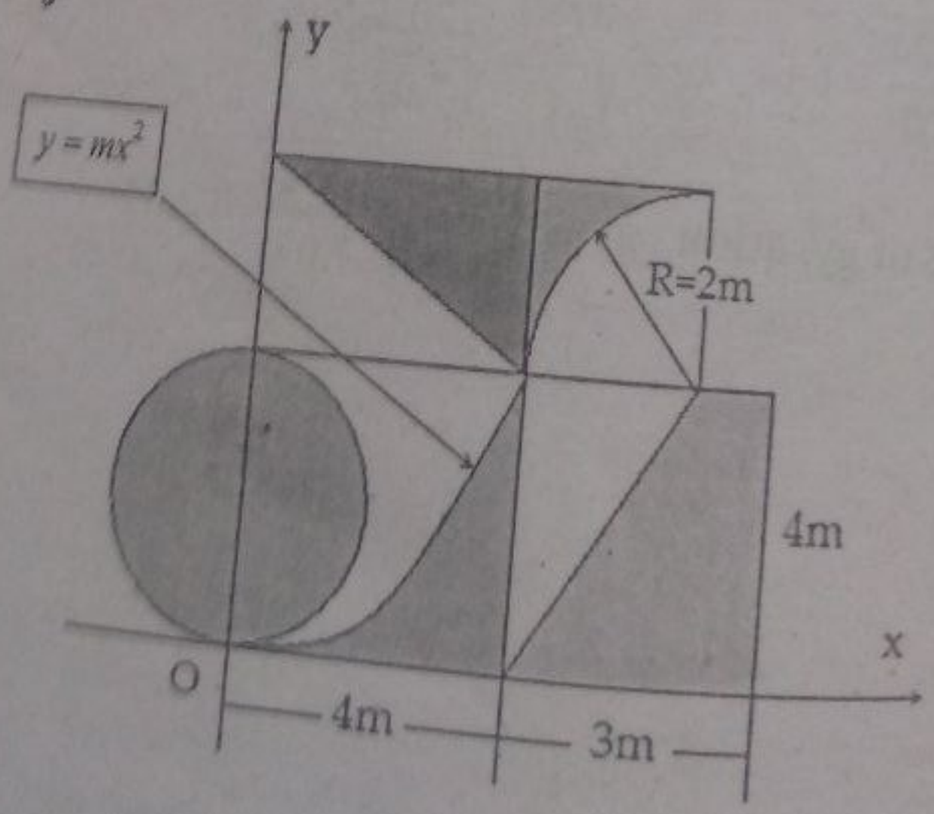

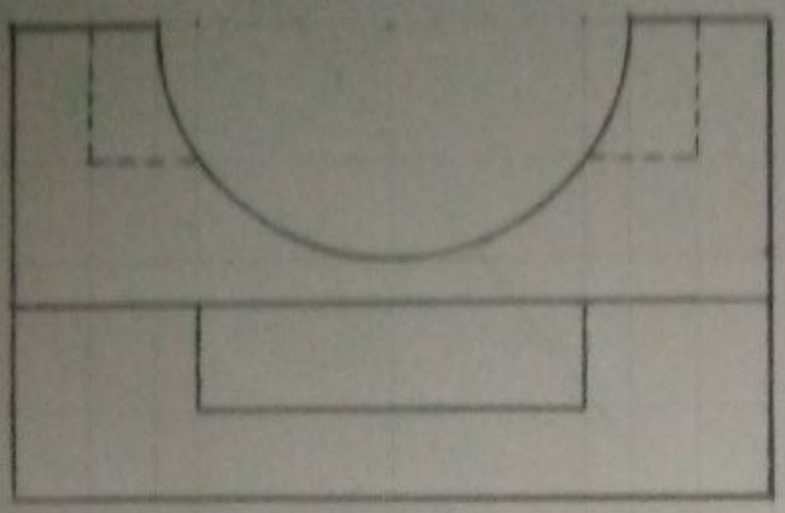

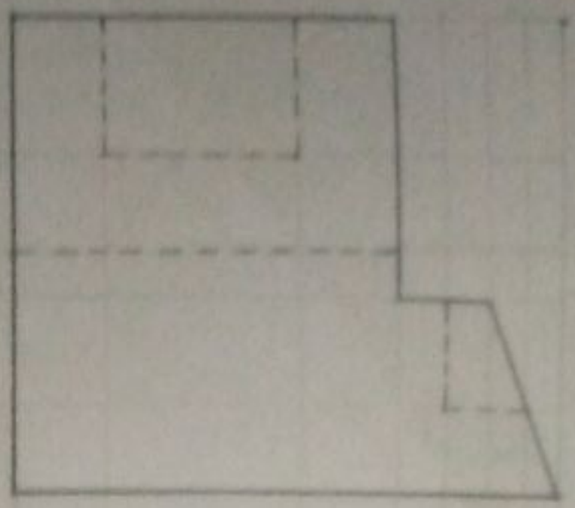

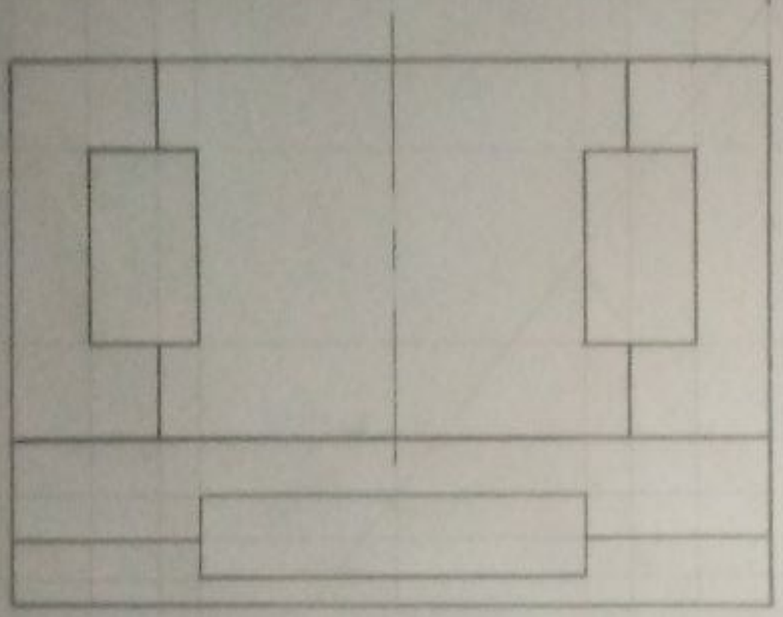

DR BY IBRAHIM MUKE	BAHIR DAR INSTITUT OF TECHNOLOGY	SCALE: 1
CH BY ERMIYAS		DATE:
DATE: 6-07-2014		
ID: 1307051	MULTI VIEW PROJCTION	
SEC: 4		